

■ the recirculation motor,

the toxicity sensor if equipped.

REFITTING



Proceed in the reverse order to removal.



[Repair-30x02x01x28-01x37-1-3-1.xml](#)



XSL version : 3.02 du 22/07/11

mcx30.com

FRONT AXLE ASSEMBLY: EXPLODED VIEW



Note, one or more warnings are present in this procedure



WARNING

To avoid all risk of damage to the systems, apply the safety and cleanliness instructions and operation recommendations before carrying out any repair:



(see 31A, Front axle components, Front axle components: Precautions for the repair).

Vehicle: Precautions for the repair.

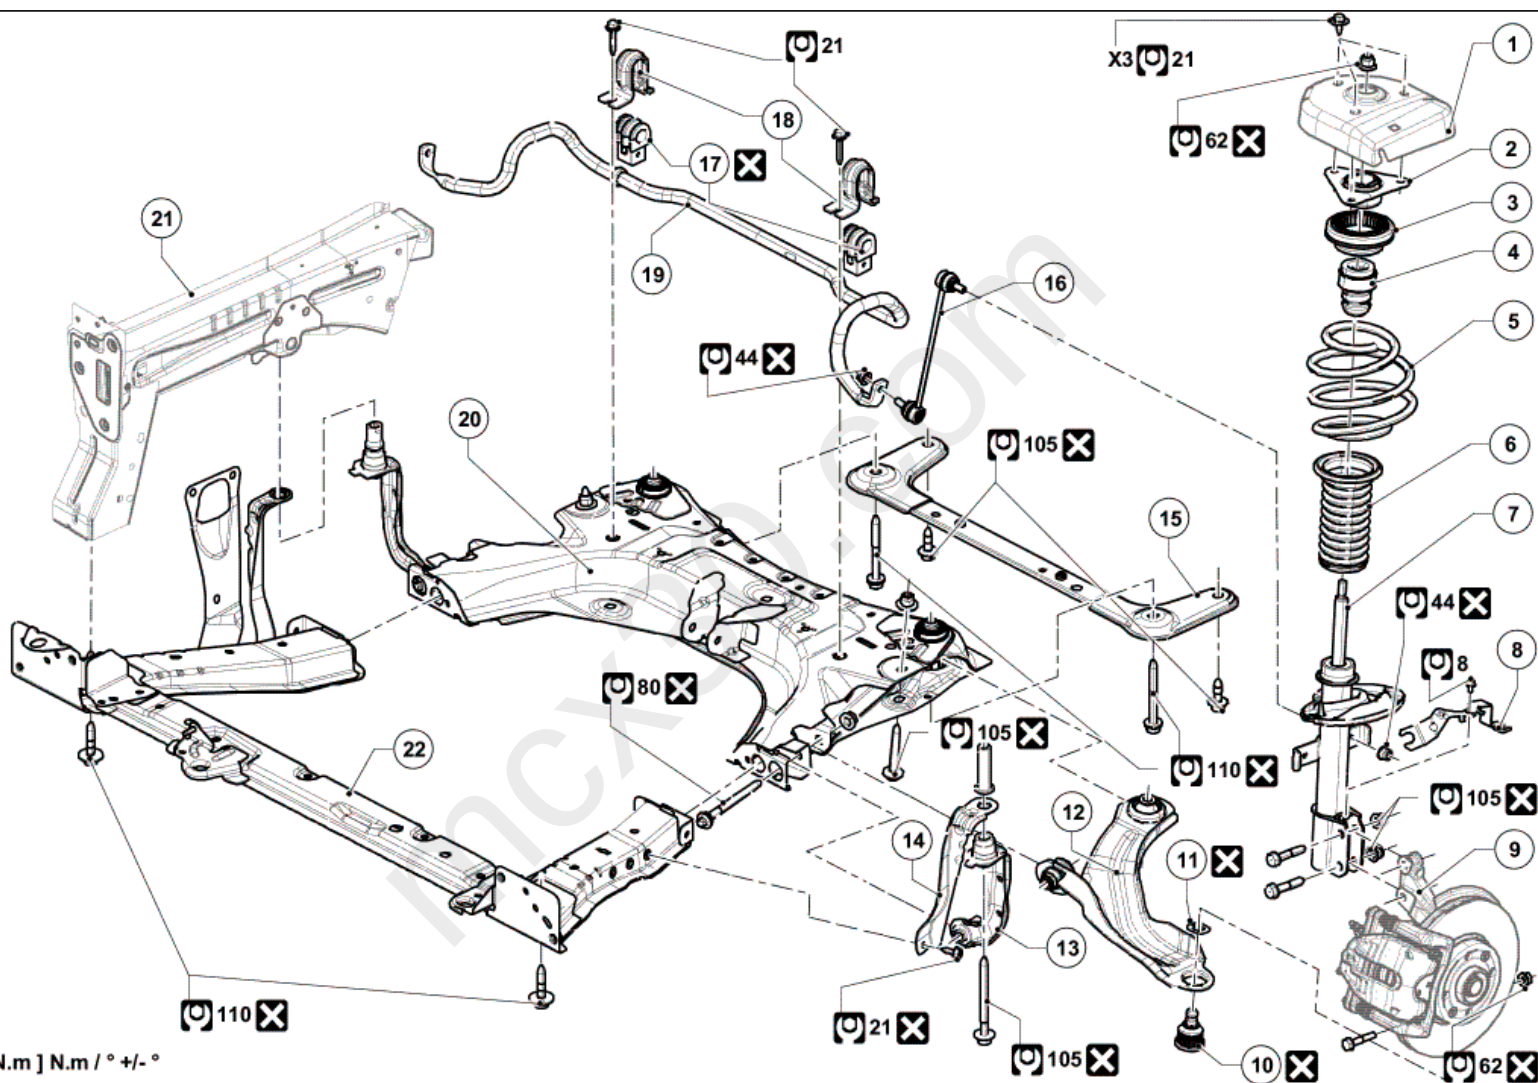


Illustration key: Description

For fastenings with no specified tightening torque values, refer to the Table of Standard Torques [Tightening torques: General information](#).