

mcx30.com

FRONT AXLE SYSTEM: ADJUSTMENT

Equipment required

Diagnostic tool

flywheel immobiliser

1. PREPARATION FOR ADJUSTMENT

Note:




- Throughout the axle assembly checking and adjustment process:
 - the Renault card must remain in the reader,
 - do not press the "START" button.

- Check the geometry ([see 30A, General information, Axle assemblies: Check](#)).

2. ADJUSTMENT OPERATION

1- WHEEL ALIGNMENT

- Set the wheels straight ahead.
- Lock the steering wheel using a flywheel immobiliser.

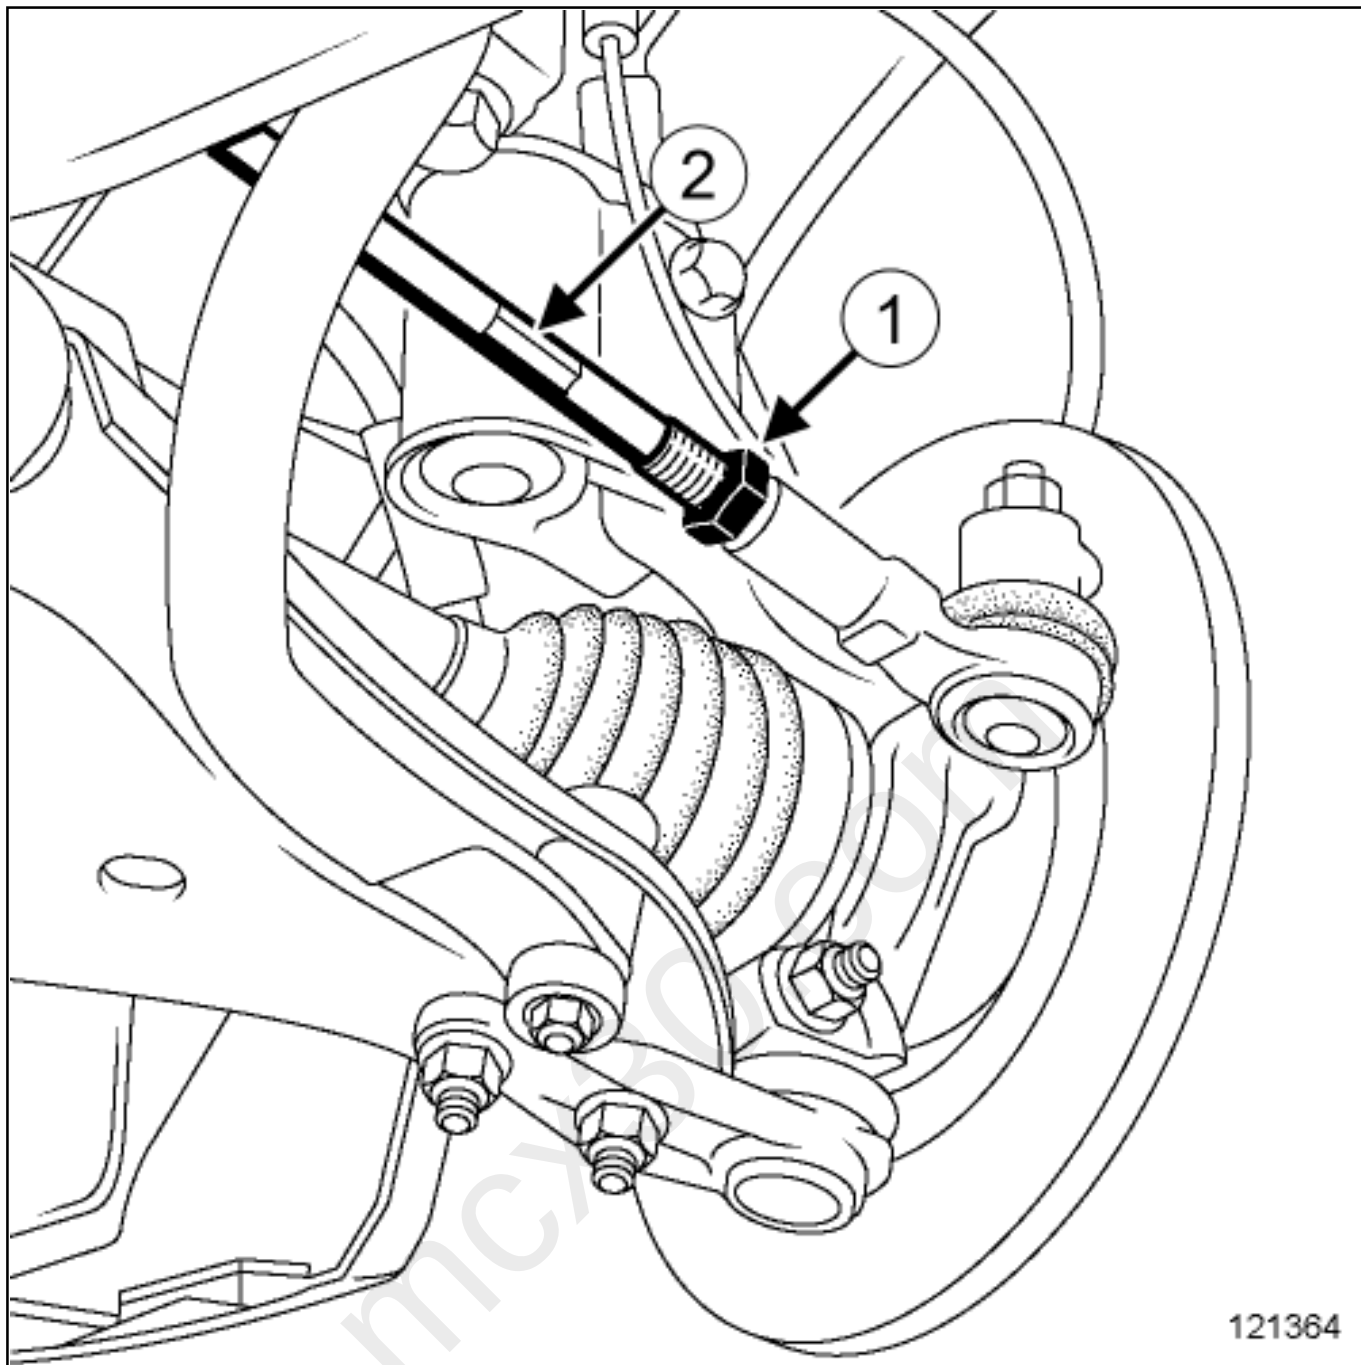

Loosen the wheel alignment adjustment lock nut(1) .

Turn the track rod sleeve(2) to the required value.