

Proceed in the reverse order to removal.

Refit the front hose union on the front brake calliper [\(see 31A, Front axle components, Front brake calliper assembly: Exploded view\)](#) .

Set the wheels straight ahead.

Clip the front brake hose cap onto the base of the shock absorber by aligning the marks made at (1) .

Bleed the braking circuit [Braking circuit: Bleed](#) .



WARNING

To avoid any accident, bring the pistons, brake pads and brake discs into contact by depressing the brake pad several times.



Repair-13x03x03x05-01x37-1-33-1.xml



FRONT BRAKE DISC: DESCRIPTION

1. PREPARATION OPERATION FOR CHECK

Position the vehicle on a two-post lift [Vehicle: Towing and lifting](#) .


Remove the wheel in question [Wheel: Removal - Refitting](#) .

2. CHECKING OPERATION FOR PART CONCERNED




Note:

Use a Palmer type tool to check the thickness of the disc.

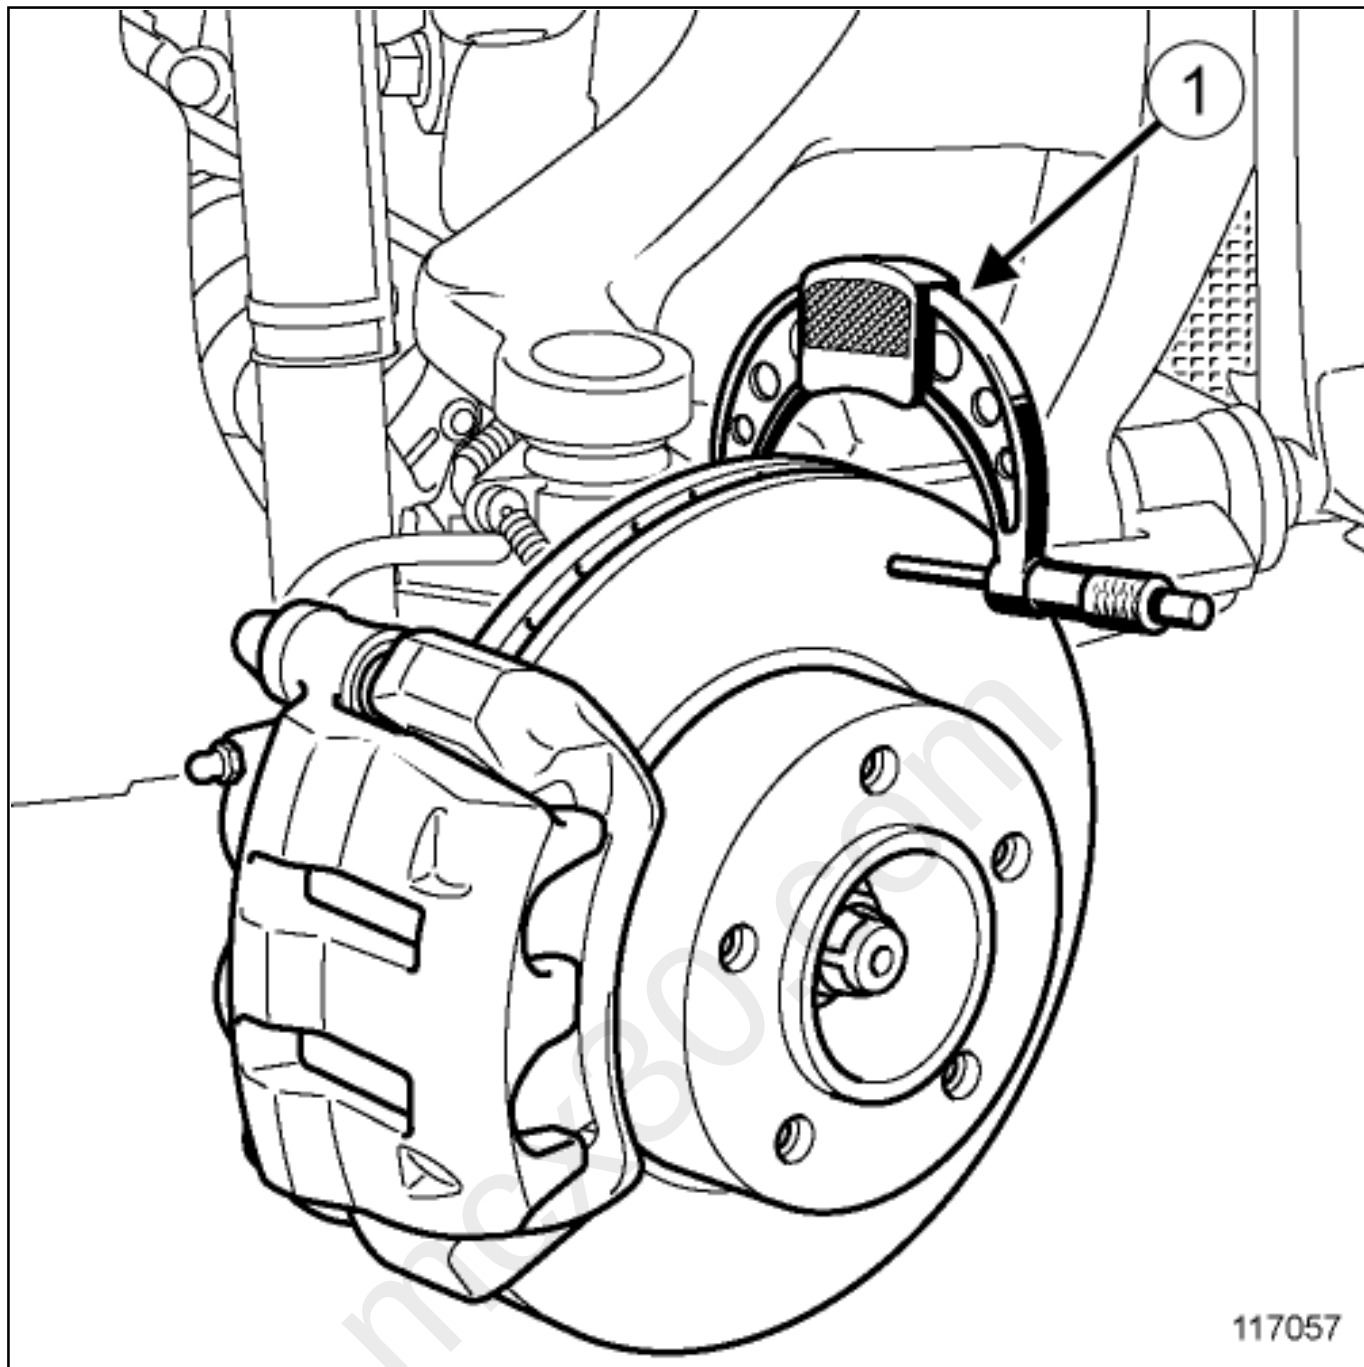

117057

Position the Palmer tool(1) to measure the disc thickness.

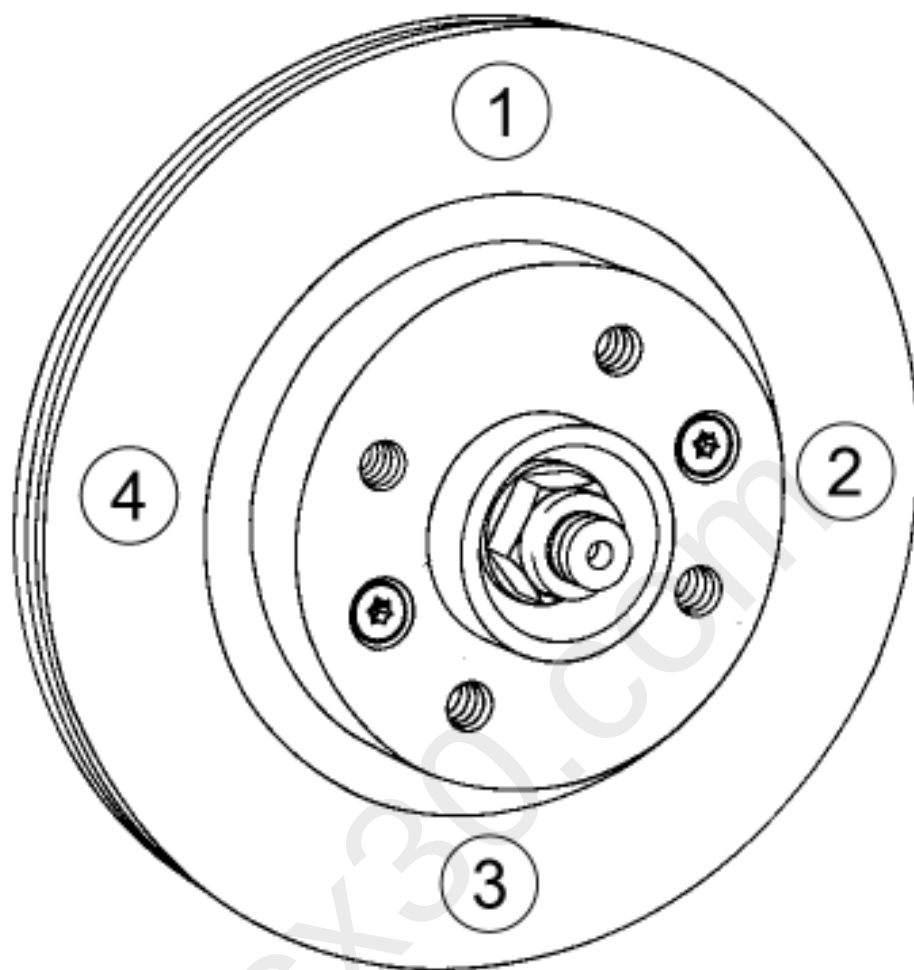

88310

Measure the thickness of the disc at 4 points in order (90° apart).

Compare the values with those recommended by the manufacturer [Brake: Specifications](#) .

3. FINAL OPERATION

Replace the discs if necessary ([see 31A, Front axle components, Front brake disc: Removal - Refitting](#)) .