

Set the wheels straight ahead.



If the vehicle is equipped, clip the cap onto the base of the shock absorber by aligning the marks made at (1) .

CAUTION



In order not to damage the brake hose:



do not tension the hose,



do not twist the hose,



check that there is no contact with the surrounding components.



Refit the front wheel [Wheel: Removal - Refitting](#) .

WARNING

To avoid any accident, bring the pistons, brake pads and brake discs into contact by depressing the brake pad several times.



Advise the customer to run-in the brake pads (no harsh braking).



Repair-13x03x03x03-01x37-1-29-1.xml



FRONT BRAKE DISC: REMOVAL - REFITTING



Note, one or more warnings are present in this procedure



Equipment required

parts washer

indelible pencil



parts always to be replaced:



Front brake disc bolt

Brake discs cannot be reground. If there is excessive scoring or wear, they will need to be replaced

[Brake: Specifications](#) .

WARNING



- To avoid all risk of damage to the systems, apply the safety and cleanliness instructions and operation recommendations before carrying out any repair:

- [Brake circuit: Precautions for the repair](#) ,
■ [Vehicle: Precautions for the repair](#) .

Location and specifications (tightening torques, parts always to be replaced, etc.)[Front brake calliper assembly: Exploded view](#) .


REMOVAL

1. REMOVAL PREPARATION OPERATION

Position the vehicle on a two-post lift [Vehicle: Towing and lifting](#) .

Set the wheels straight ahead.

Remove the front wheel [Wheel: Removal - Refitting](#) .

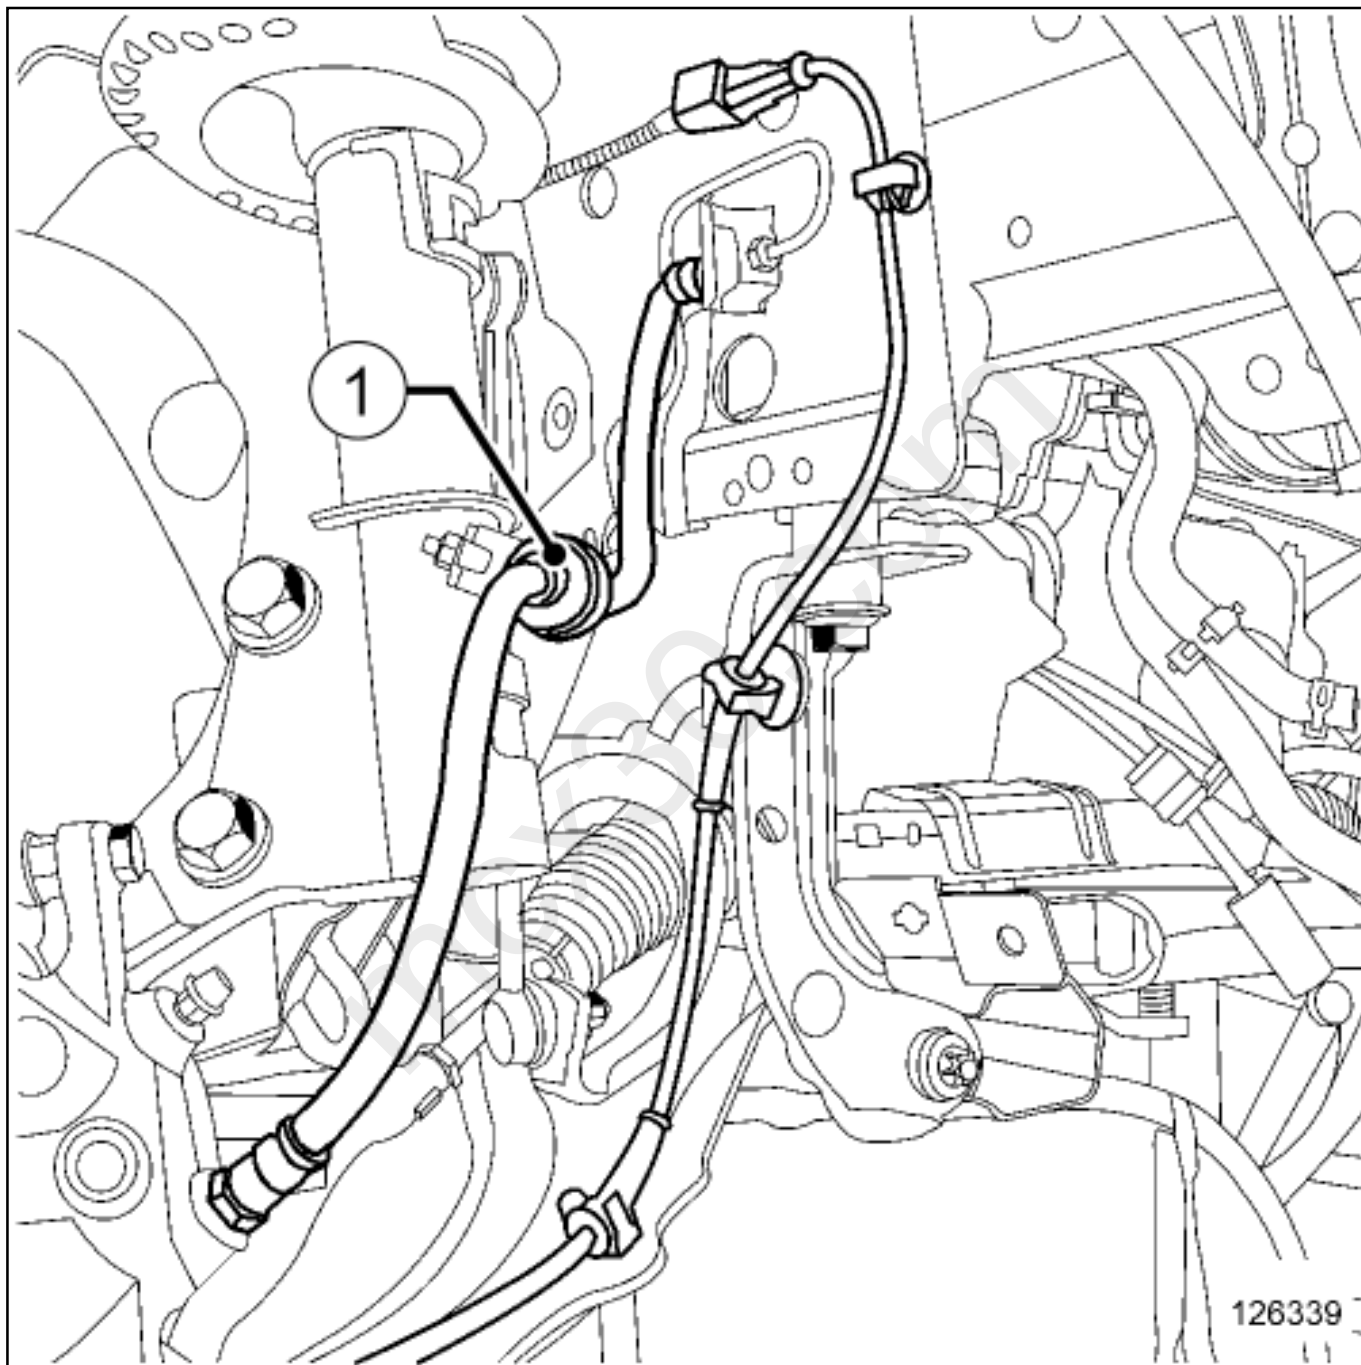

If the vehicle is equipped:

mark the position of the cap(1) on the base of the shock absorber using an indelible pencil,

unclip the cap(1) from the base of the shock absorber.


Remove [Front brake calliper assembly: Exploded view](#) :

the brake pads,

the "brake calliper mounting - brake calliper" assembly.

Hang the "brake calliper mounting - brake calliper" assembly(2) on the suspension spring.

2. REMOVAL OPERATION

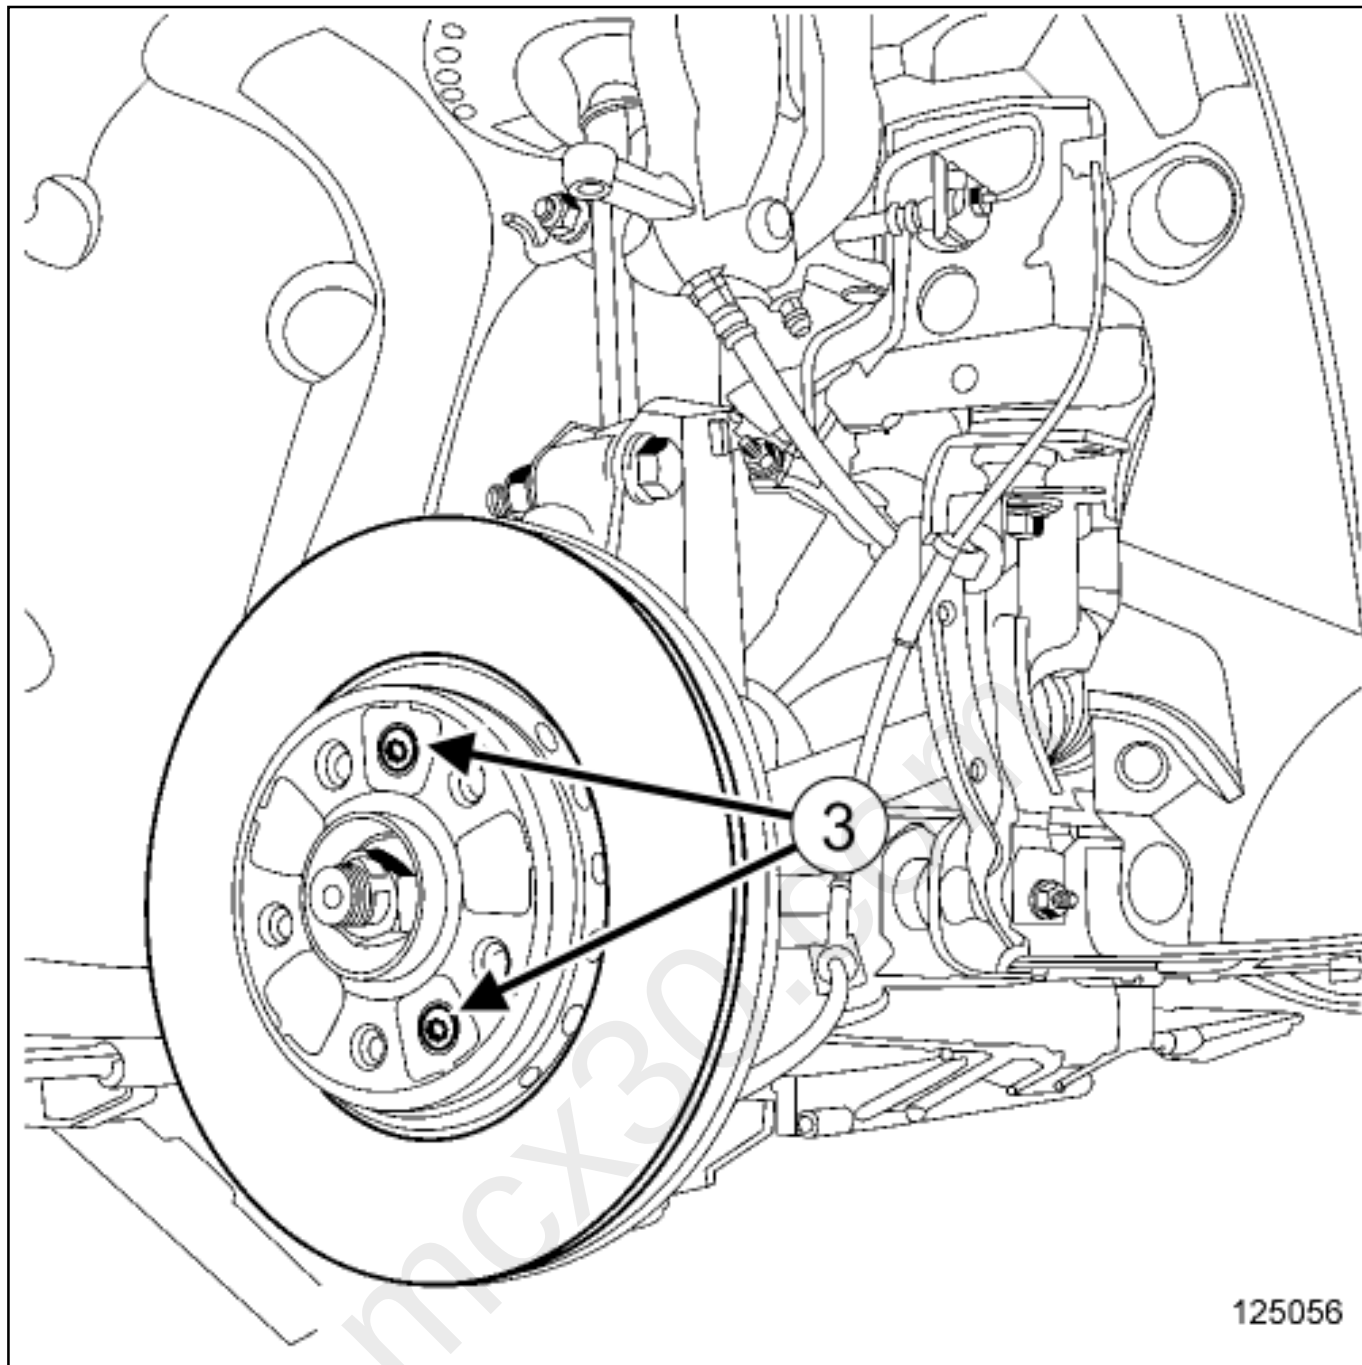

Remove:

-
- the brake disc bolt or bolts(3) ,
-
- the brake disc.

1. REFITTING PREPARATION OPERATION



Clean the brake discs using a parts washer.



Dry the surface of the discs.



Clean the mating faces of the disc on the hub using a wire brush and brake cleaner [Vehicle: Parts and consumables for the repair](#) .



parts always to be replaced:



Front brake disc bolt .



2. REFITTING OPERATION



Refit the brake disc with new bolts.



Torque tighten the new disc mounting bolts [Front brake calliper assembly: Exploded view](#) .

3. FINAL OPERATION



Refit [Front brake calliper assembly: Exploded view](#) :



the "brake calliper mounting - brake calliper" assembly,



the brake pads.