



Repair-40x06x02x01-02x49-1-2-1.xml



XSL version : 3.02 du 22/07/11


mcx30.com

FRONT WING: REMOVAL - REFITTING


The front wing is a structural bodywork component made of thermoplastic, and can be removed.

REMOVAL

1. REMOVAL PREPARATION OPERATION

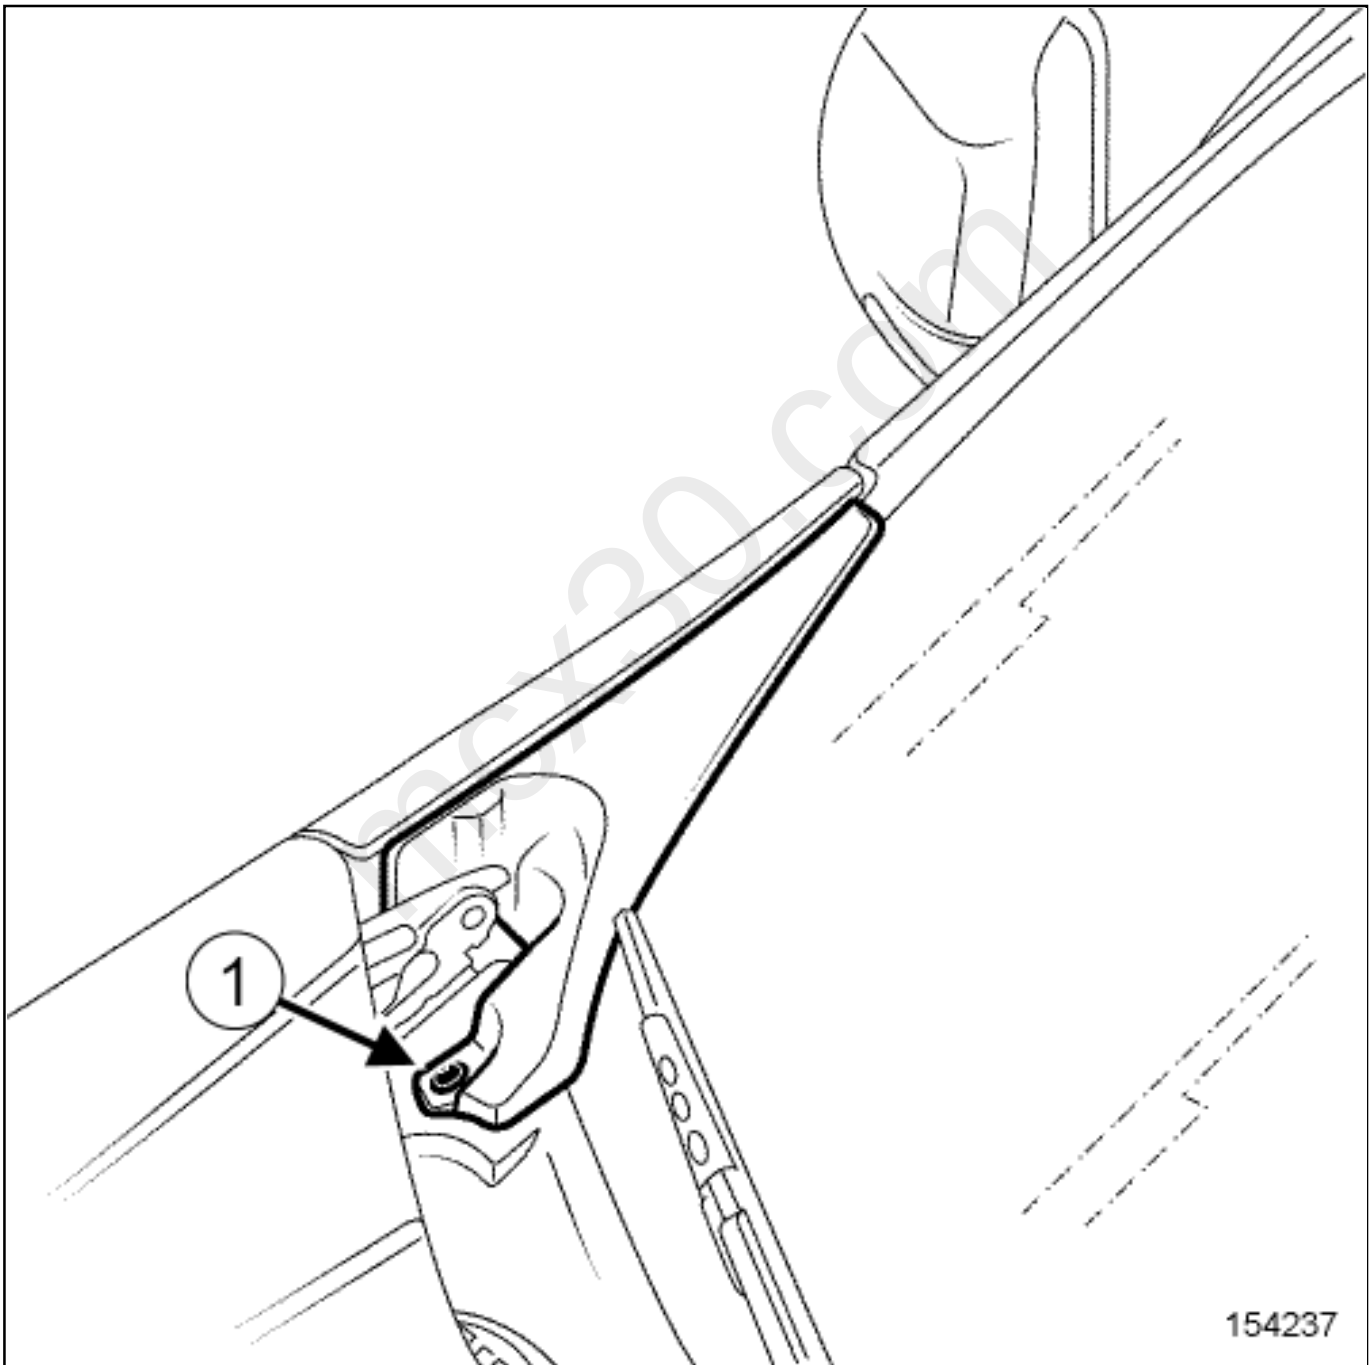

- Remove the windscreen trim screw(1) .

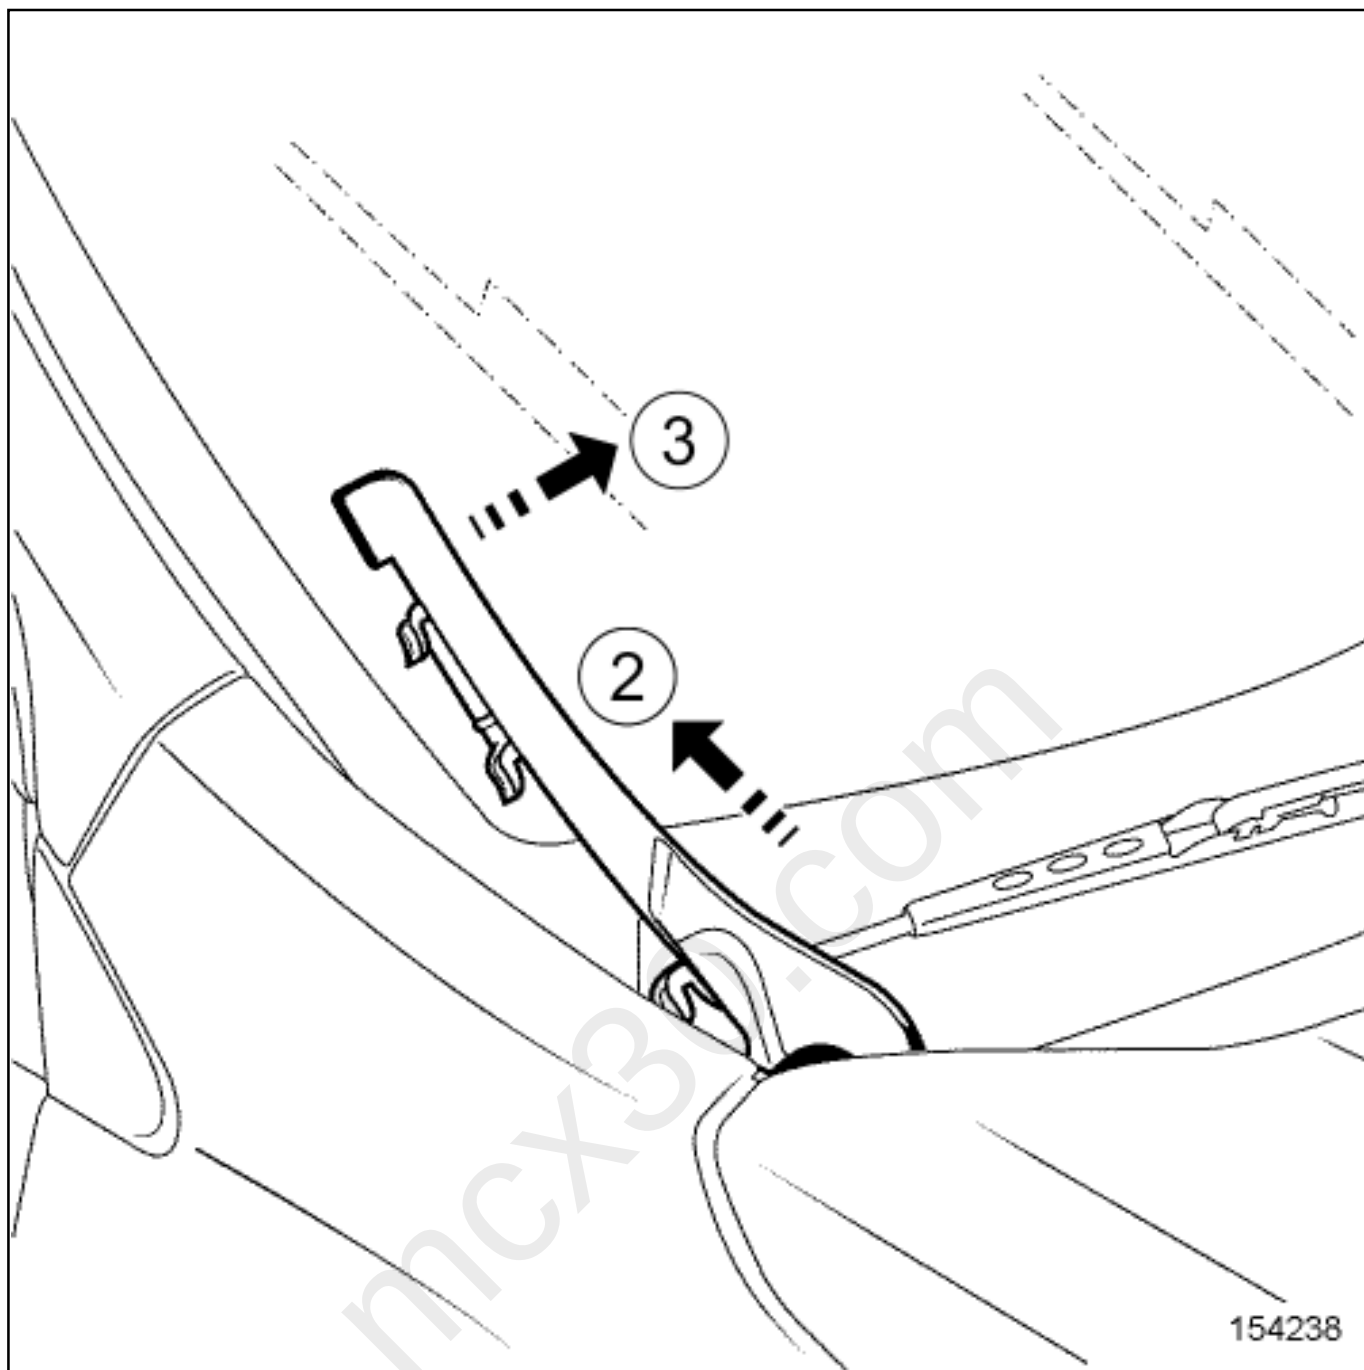

■ Remove the windscreen trim by sliding at(2) and pulling at(3) .



Remove:



the front wing trim [Exterior body side trim assembly: Exploded view](#) ,



the front wheel arch liner [Exterior body front trim assembly: Exploded view](#) ,

the front bumper [Front bumper assembly: Exploded view](#) ,

the windscreen wiper arms [Wiping and washing: List and location of components](#) ,

the scuttle panel grille [Scuttle panel grille: Removal - Refitting](#) .

2. REMOVAL OPERATION

Remove [Exterior body front trim assembly: Exploded view](#) :

the front wing interior soundproofing material,

the front wing bolts,

the front wing nuts,

the front wing.

REFITTING

1. REFITTING OPERATION

Refit [Exterior body front trim assembly: Exploded view](#) :

the front wing,

the front wing bolts and nuts.

Adjust the shut lines of the front wing [Vehicle panel gaps: Adjustment value](#) .

Refit the front wing interior soundproofing material.