

11	Foam	
12	Rear side door check strap	
13	Rear side opening element interior opening control bolt	
14	Rear side door check strap bolt	
15	Rear side door check strap nut	
16	Rear side opening element hinge nuts	
17	Rear side opening element hinge nut	
18	Rear side opening element hinge bolts	
19	Rear side opening element hinge	
20	Rear side opening element hinge bolt	
21	Rear side door check strap nuts	
22	Rear side opening element hinge nut	
23	Rear side opening element hinge nuts	
24	Rear side opening element hinge bolt	
25	Rear side opening element hinge nut	
26	Rear side opening element hinge	
27	Rear side opening element	Rear side opening element: Removal - Refitting

OUTER REAR WHEEL ARCH: REPLACEMENT



Note, one or more warnings are present in this procedure




1. COMPOSITION OF THE SPARE PART

mcx30.com



155311

No.	Description	Type	Thickness (mm)
(1)	Quarter panel lining	Mild steel	0.6

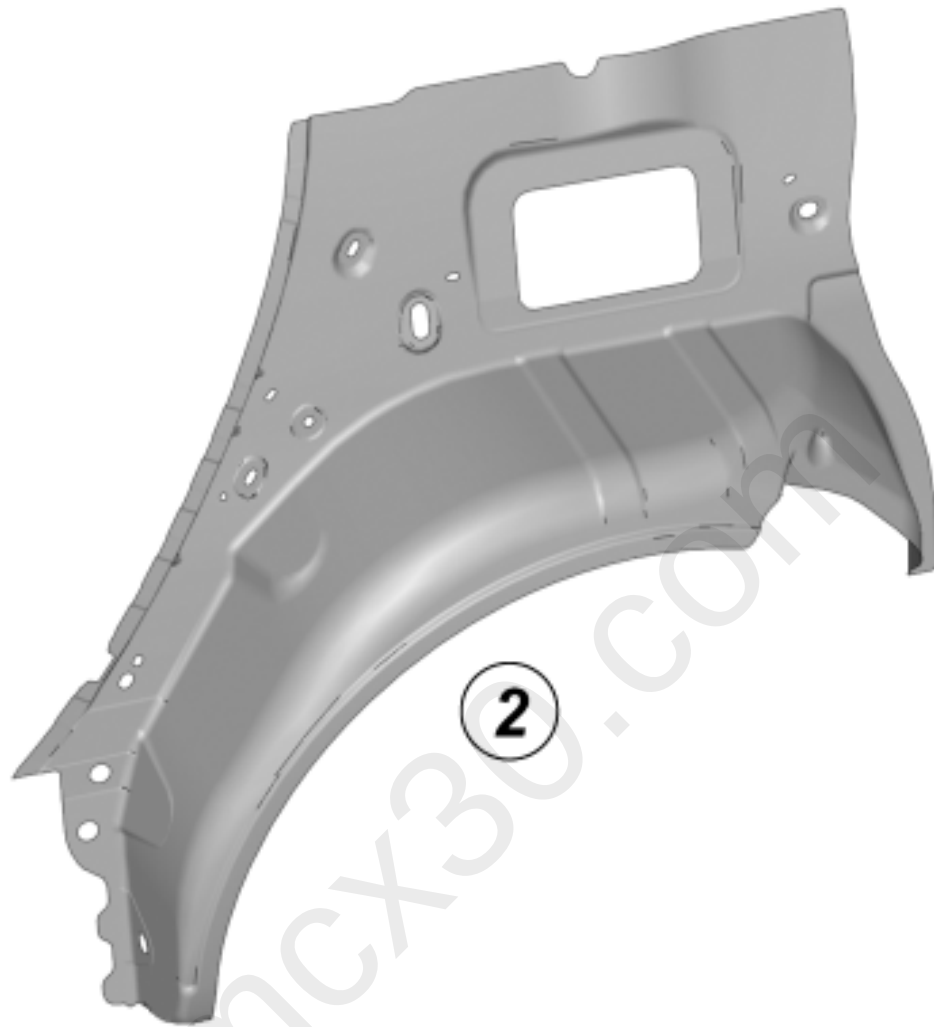


157928

No.	Description	Type	Thickness (mm)
(2)	Quarter panel lining	Mild steel	0.6

- There is only one way of replacing this part:
 - complete replacement.

mcx30.com

K98(K98)



K98(K98)




157929


1- COMPLETE REPLACEMENT

1)PART IN POSITION

B98(B98)

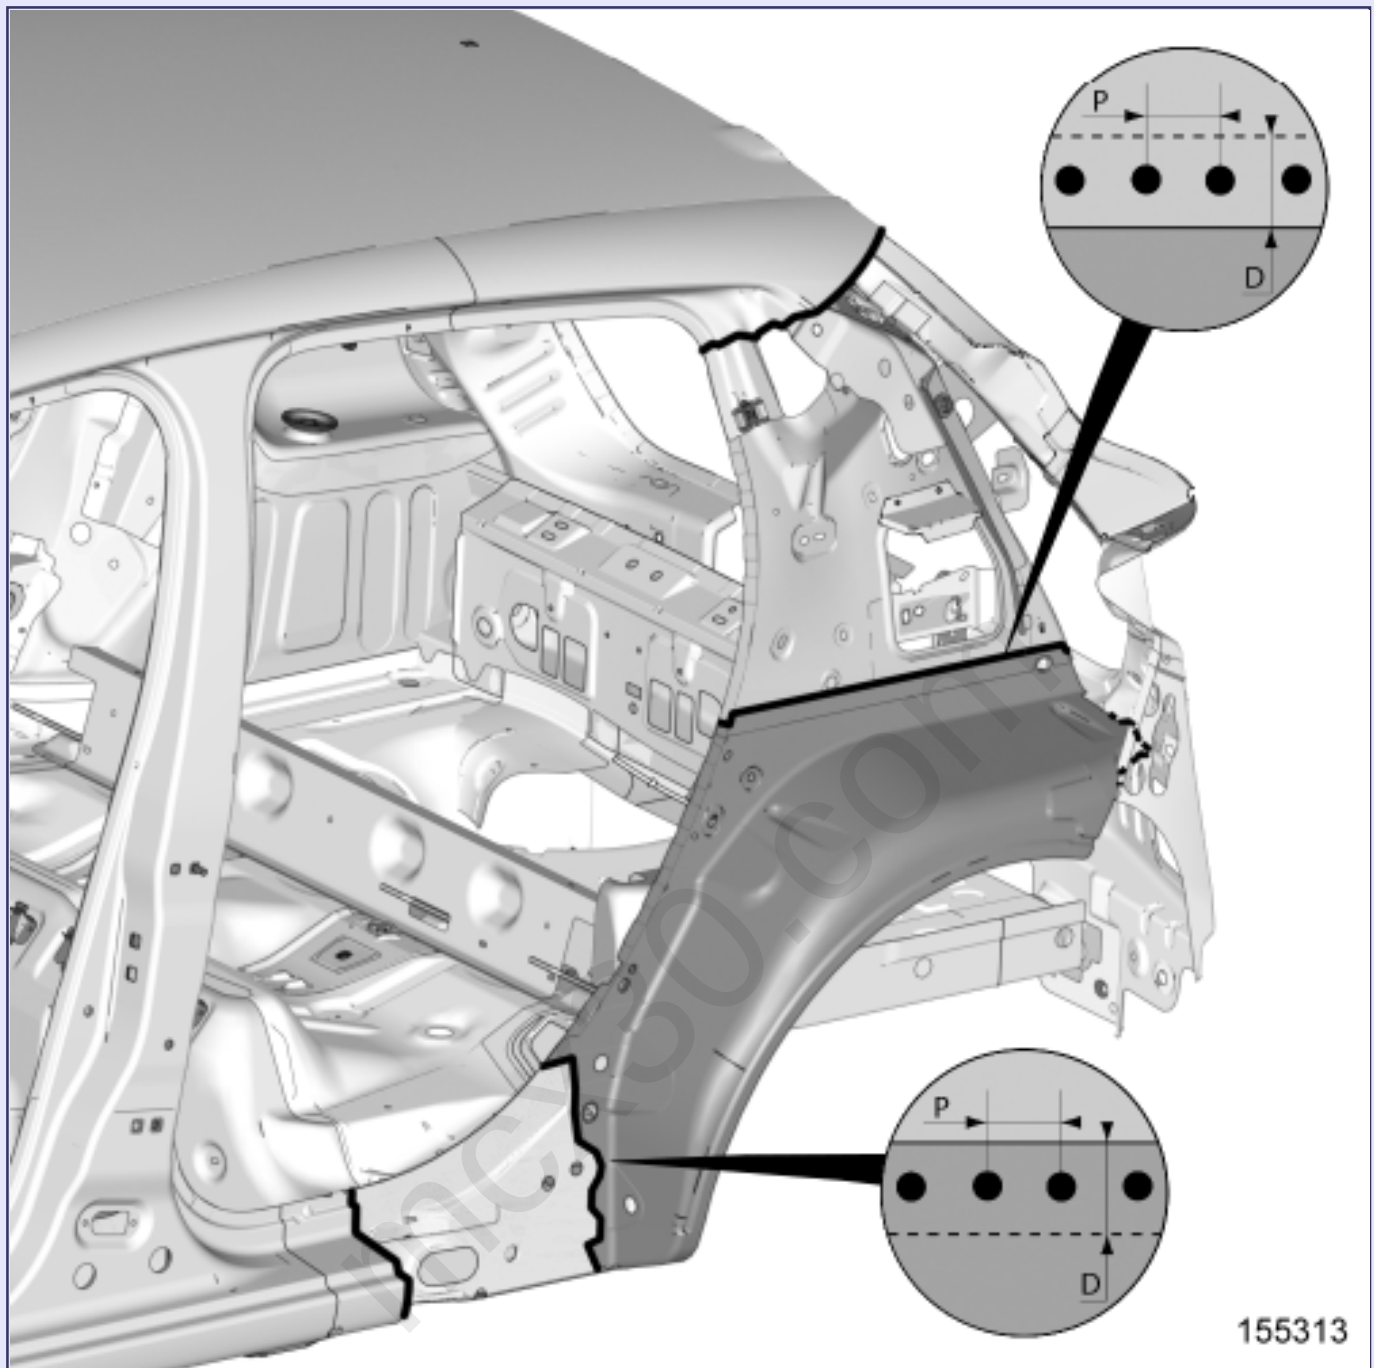

K98(K98)

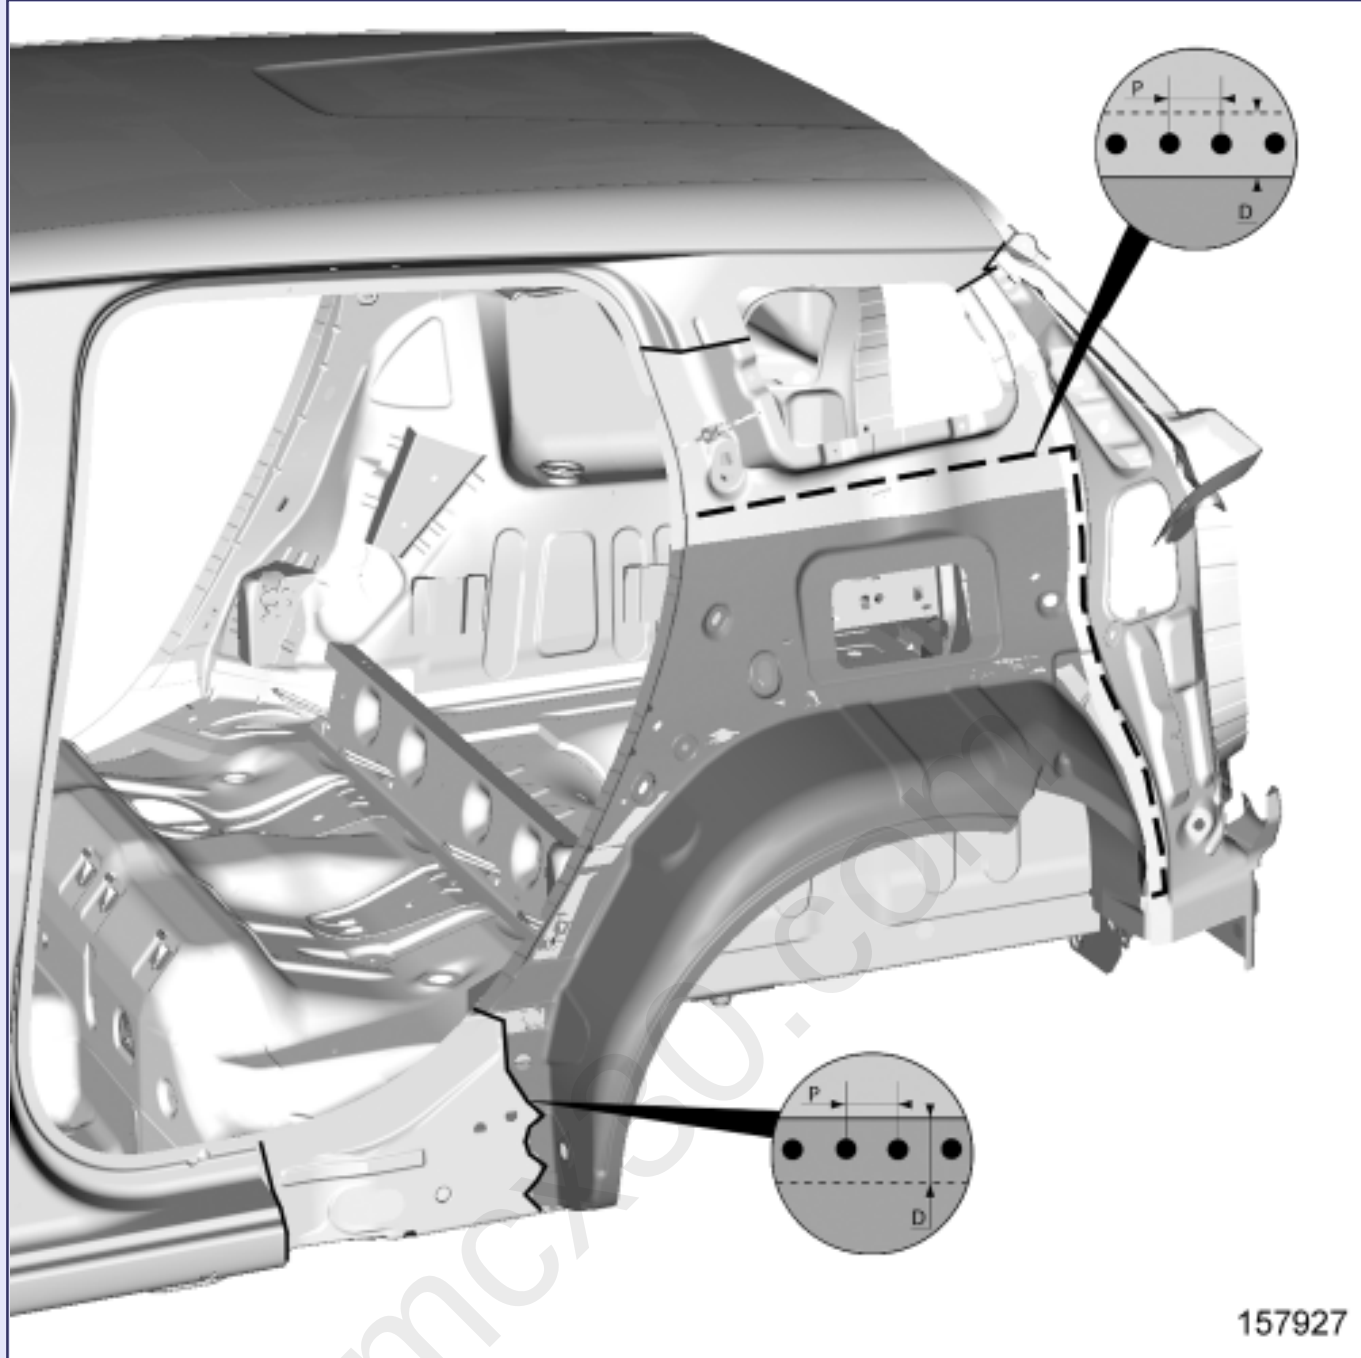

P (Pitch) = 25 mm

D = 30 mm

Make a superimposed connection [Partial replacement connections by overlapping: Description](#) (MR 400, 40E, Partial replacement connections).

2) POSITION OF ELECTRIC EARTHS