

Comply with the drying times in accordance with the Product technical datasheet. It is recommended to use an infrared drying device to accelerate drying and facilitate sanding.

4. FINISHING

Use a suitable grain in accordance with the Product technical datasheet.



Method for sanding the mastic:

-
- Sand from the centre towards the exterior without touching the edge of the mastic.
- Remove the scratches created previously by the sanding by starting to level the edges.
-
- Sand the whole area to be repaired, overlapping by 150 to 200 mm with P240 to P280 in order to apply undercoat.

Apply the preparation procedure before painting

[Steel bodywork component: Preparation and paint range](#) (Technical Note 592A, 94A, Paint application procedure for panels).



[Repair-00x03x04x14-02x21-2-1-1.xml](#)



XSL version : 3.02 du 22/07/11

PARKING BRAKE ASSEMBLY: EXPLODED VIEW



Note, one or more warnings are present in this procedure




WARNING

- To avoid all risk of damage to the systems, apply the safety and cleanliness instructions and operation recommendations before carrying out any repair:



■ [Brake mechanism: Precautions for the repair](#).

■ [Vehicle: Precautions for the repair](#).

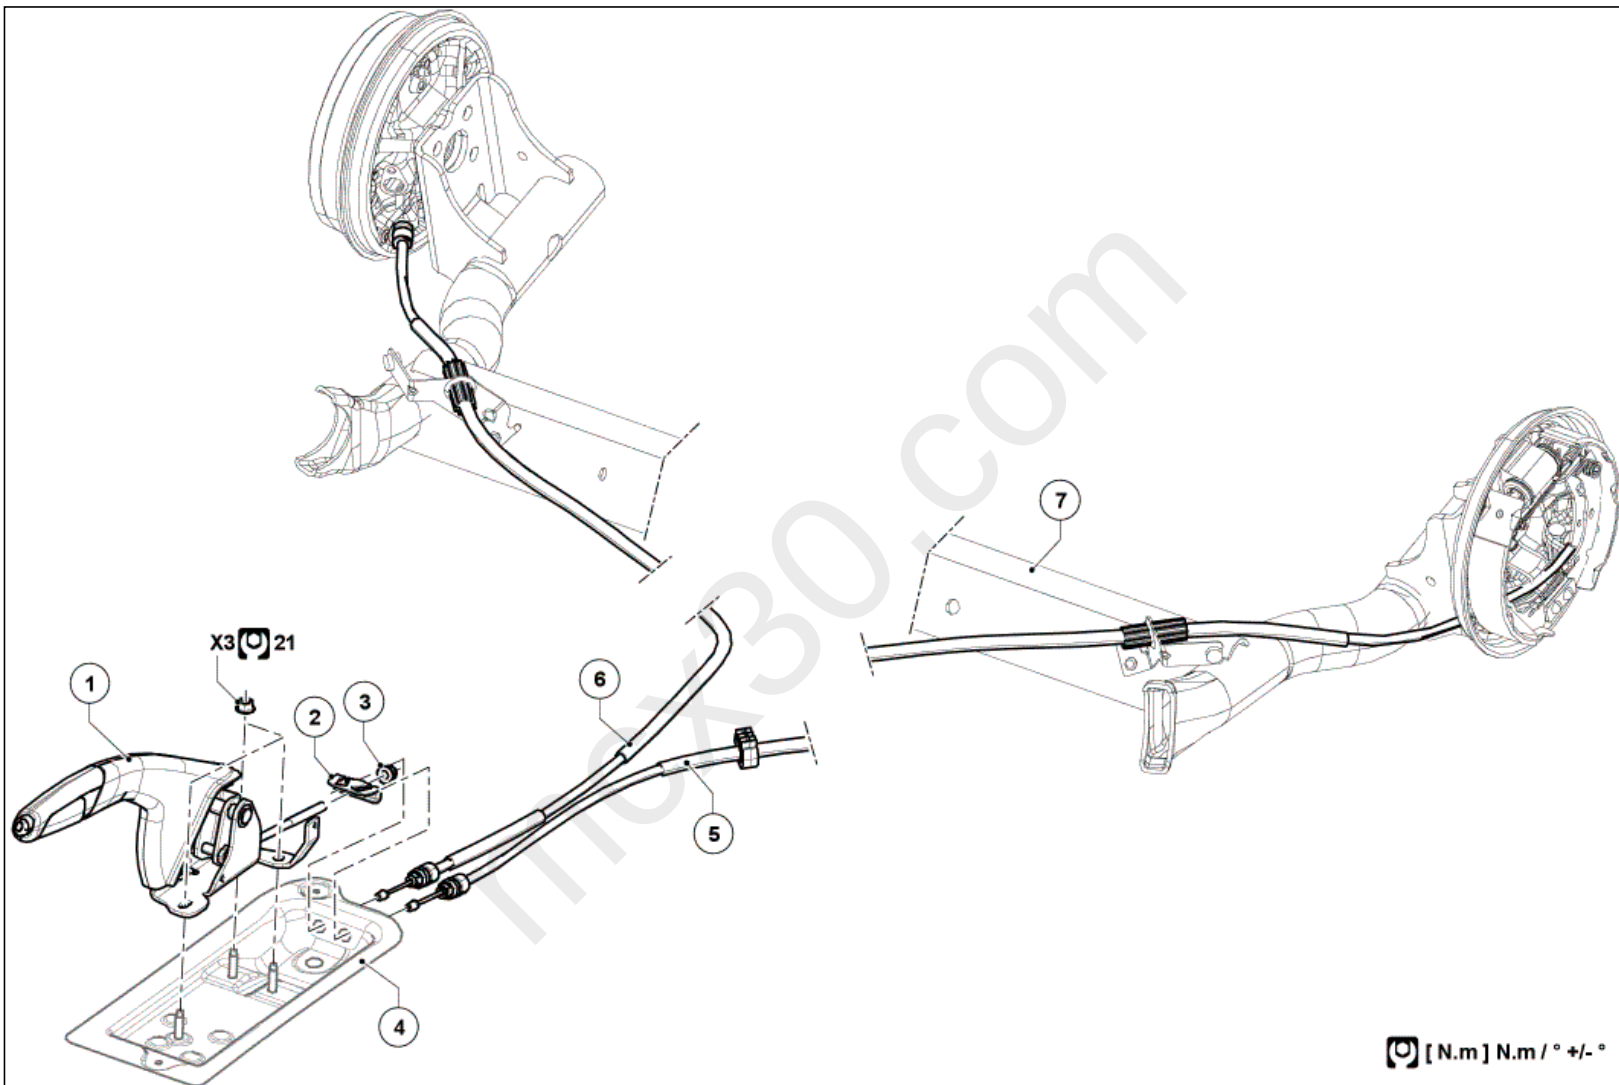

[N.m] N.m / ° +/- °

[Illustration key: Description](#).

For fastenings with no specified tightening torque values, refer to the Table of Standard Torques [Tightening torques: General information](#).