



Repair-30x02x04x12-01x37-1-18-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com

PASSENGER'S FRONTAL AIRBAG: REMOVAL - REFITTING



Note, one or more warnings are present in this procedure



parts always to be replaced:



[Passenger's frontal airbag mounting on dashboard](#)

[Passenger's frontal airbag mounting on dashboard cross member](#)

Locations and specifications (tightening torques, parts to always be replaced, etc.) [Dashboard assembly: Exploded view](#) .

WARNING



To avoid all risk of damage to the systems, apply the safety and cleanliness instructions and operation recommendations before carrying out any repair:



[\(see 88C, Airbags and pretensioners, Airbag and pretensioners: Precautions for the repair\)](#) ,



[Vehicle: Precautions for the repair](#) .



WARNING



Never handle the pyrotechnic systems (pretensioners or airbags) near to a source of heat or naked flame - they may be triggered.


REMOVAL


1. REMOVAL PREPARATION OPERATION



Disconnect the battery [Battery: Removal - Refitting](#) .

Remove the glovebox [Dashboard assembly: Exploded view](#) .

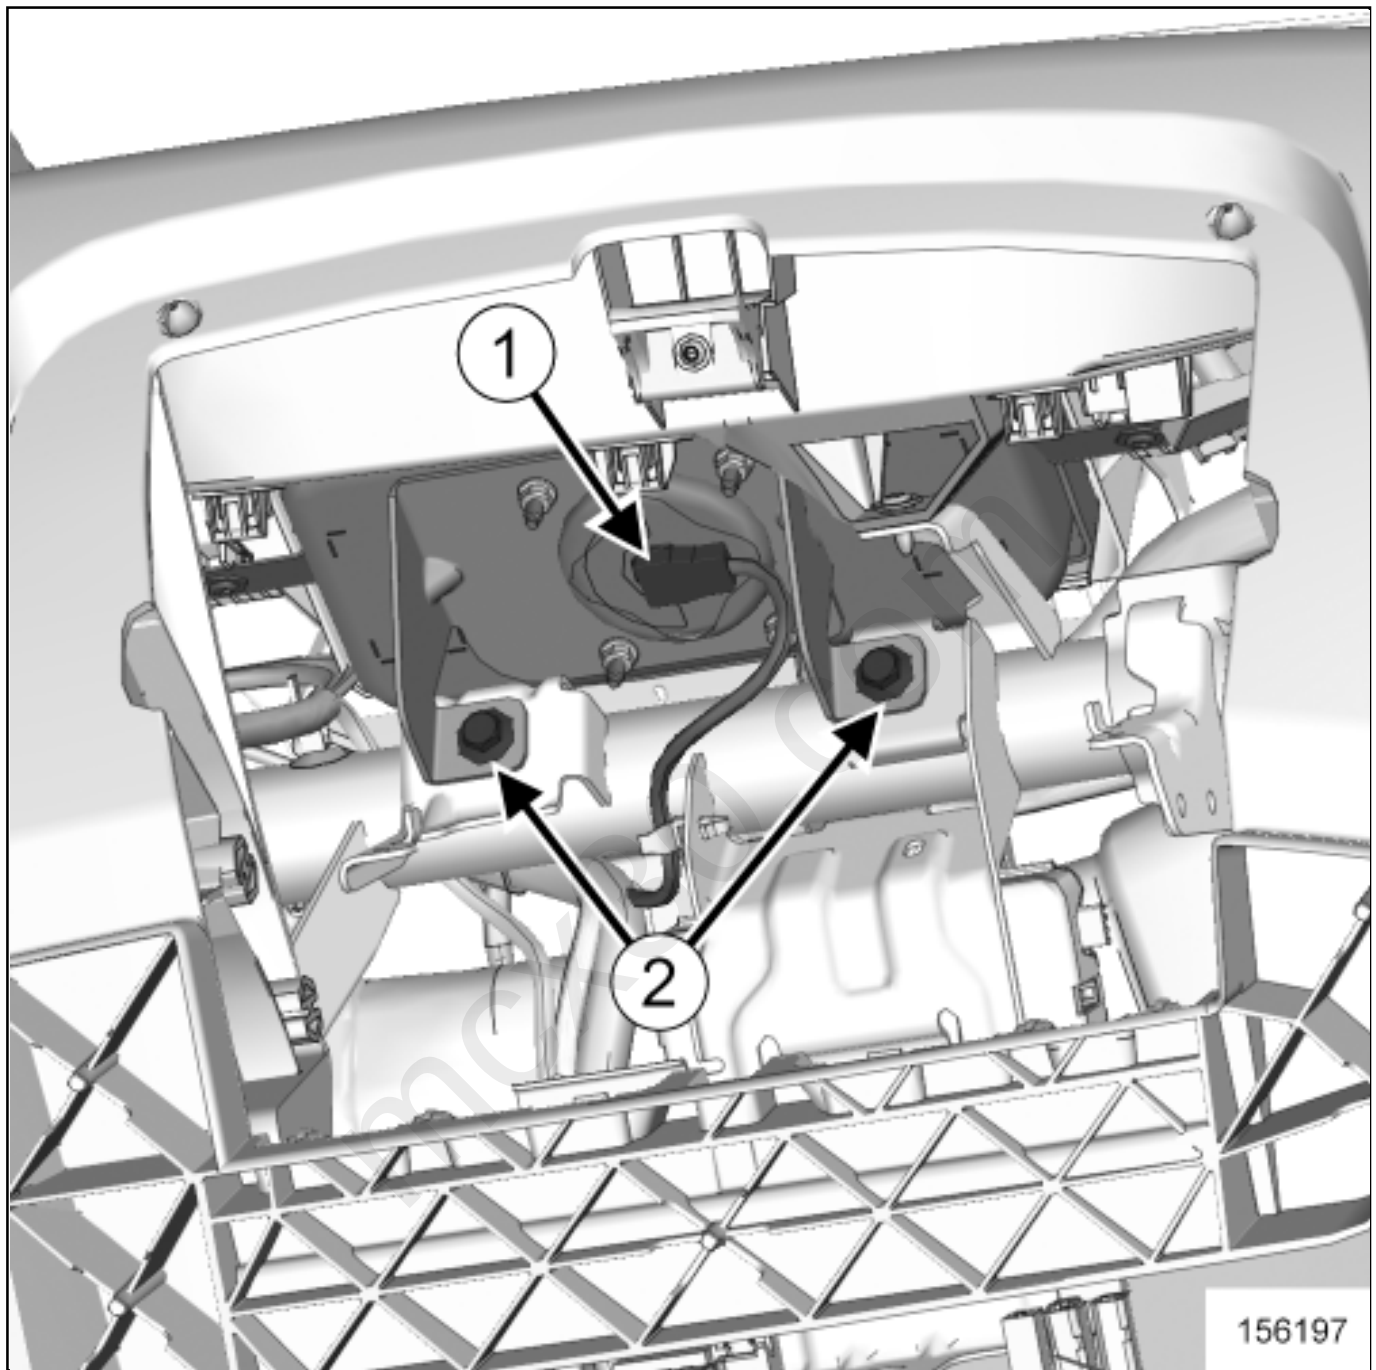

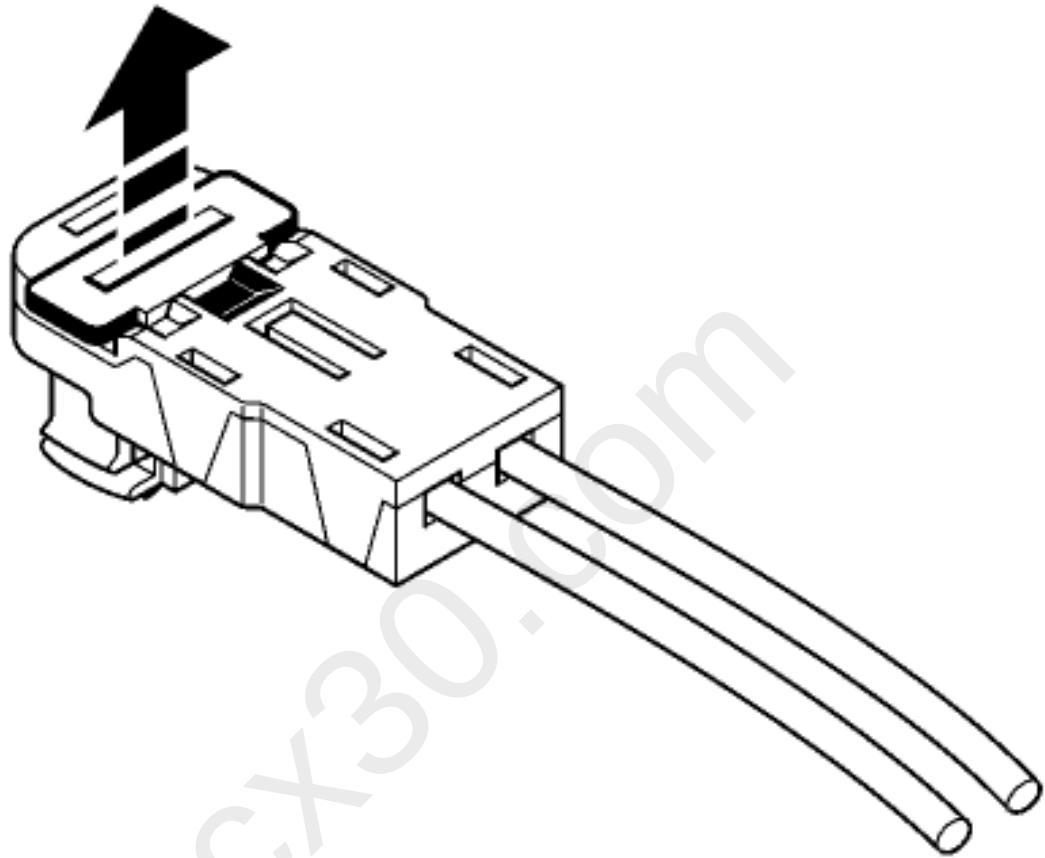


101920

■ Disconnect the airbag module connector(1) by unclipping the safety device.

■ Remove the bolts(2) attaching the airbag module to the dashboard cross member.

■ Remove the dashboard [Dashboard assembly: Exploded view](#) .

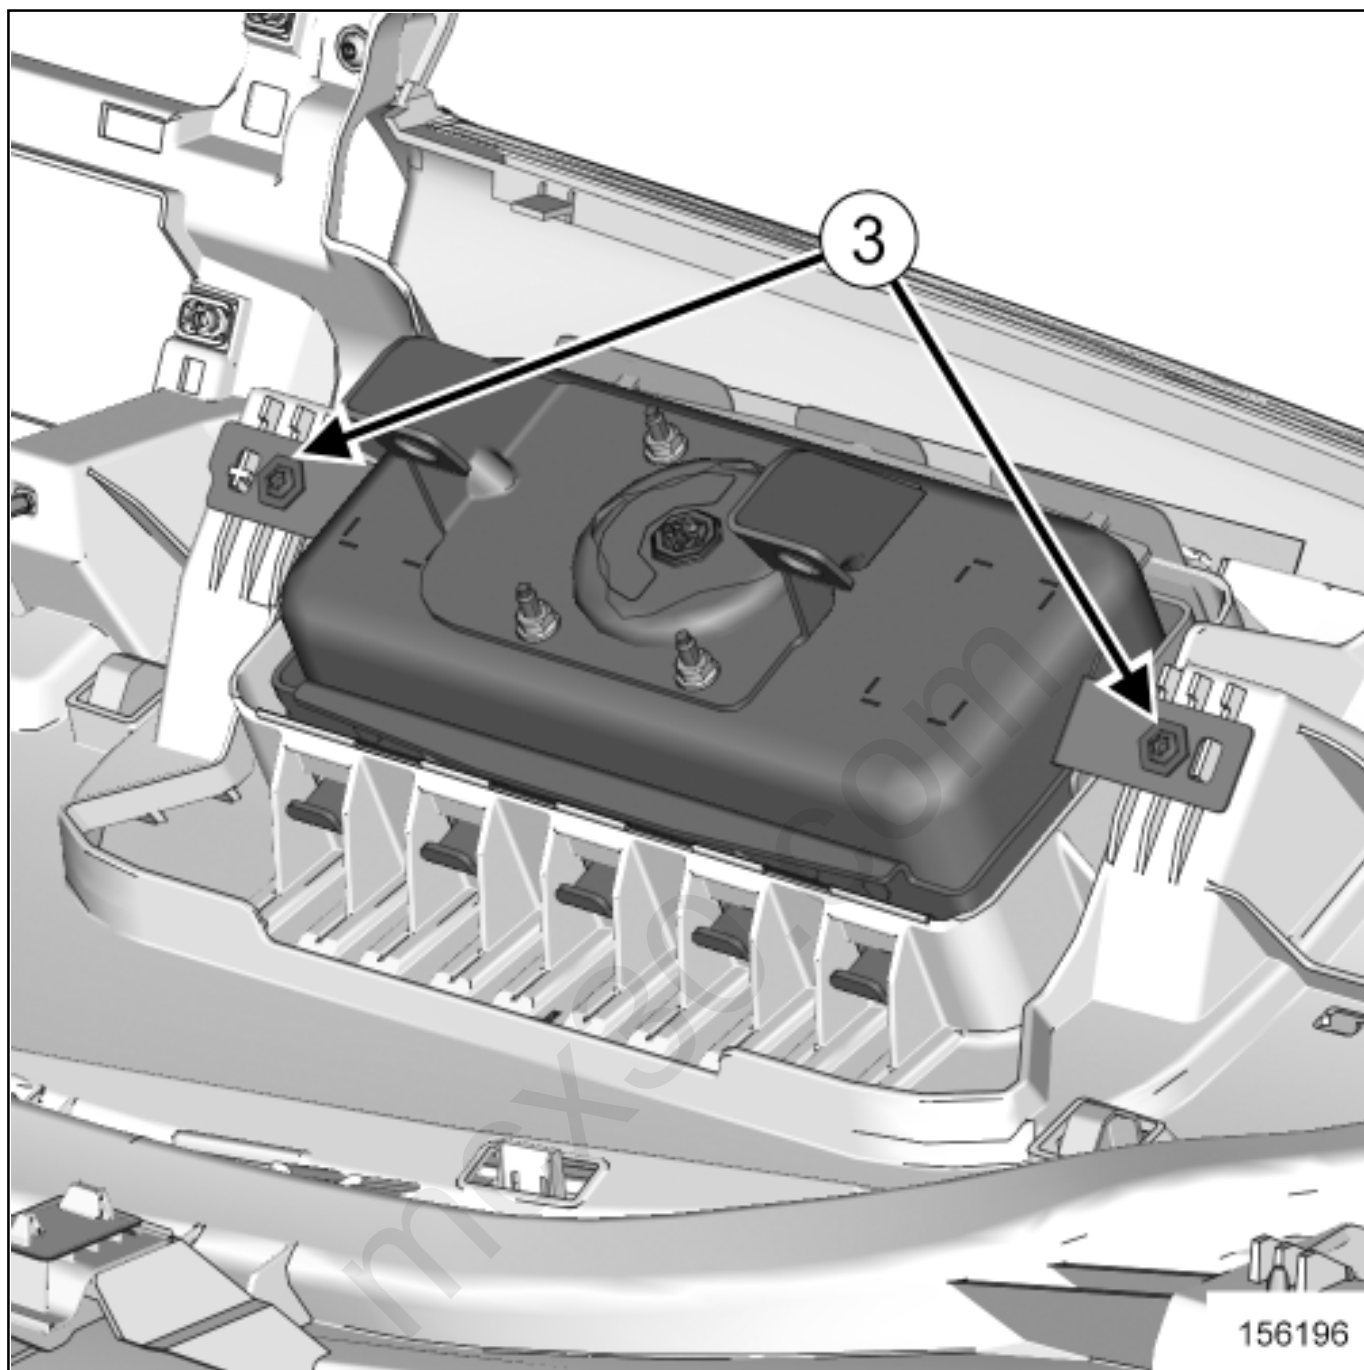

Remove the screws(3) attaching the airbag module to the support.

Move the airbag module support to detach clips.

Remove the passenger's frontal airbag.



WARNING

To prevent the any component from being thrown upwards, store the airbag with the inflatable cushion facing upwards.

REFITTING

1. REFITTING PREPARATION OPERATION



parts always to be replaced:

Passenger's frontal airbag mounting on dashboard



parts always to be replaced:

Passenger's frontal airbag mounting on dashboard cross



member

2. REFITTING OPERATION



Proceed in the reverse order to removal.



Torque tighten the passenger front airbag screws on the dashboard 2 N.m.

3. FINAL OPERATION



Proceed in the reverse order to removal.

