



mcx30.com

PLUGS: REMOVAL - REFITTING



Note, one or more warnings are present in this procedure



Special tooling required

14 mm Plug spanner.

Ele. 1382-01

Torque wrench for spark plugs

Ele. 1933

Equipment required

set of feeler gauges



WARNING

Before carrying out any operation on a vehicle fitted with the Stop & Start system, always follow the safety instructions [Vehicle: Precautions for the repair](#).

Locations and specifications (tightening torques, parts always to be replaced, etc.). [Cylinder head assembly: Exploded view](#)

REMOVAL

1. REMOVAL PREPARATION OPERATION

■ Move the intercooler air inlet pipe [Air inlet assembly: Exploded view](#).



Disconnect the petrol vapour rebreathing pipe from:



the rocker cover,



the turbo-manifold air inlet pipe.



Move the petrol vapour rebreathing pipe.

Remove [Cylinder head assembly: Exploded view](#) :



the design cover bolts,




the design cover.

Remove the ignition coil [Cylinder head assembly: Exploded view](#) .

2. REMOVAL OPERATION

mcx30.com

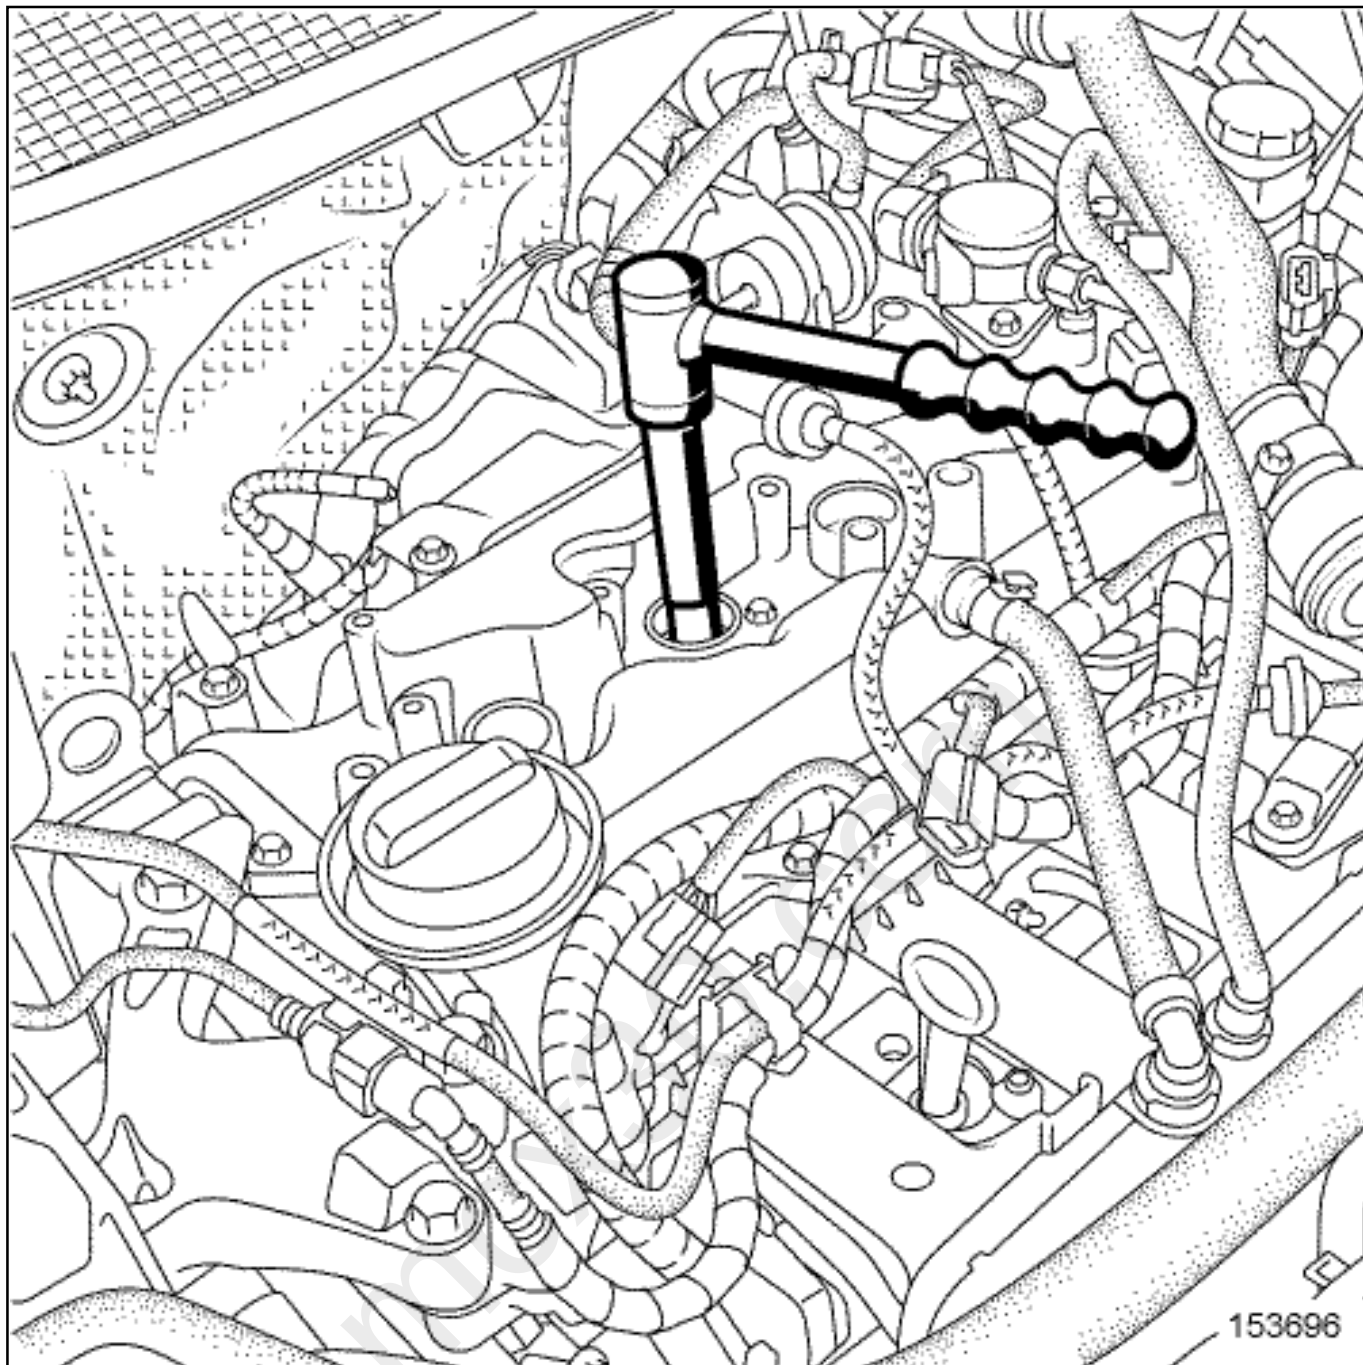

Remove the spark plugs using the tool 14 mm Plug spanner.(Ele. 1382-01) equipped with the tool Torque wrench for spark plugs(Ele. 1933) [Cylinder head assembly: Exploded view](#) .

REFITTING

1. REFFITTING PREPARATION OPERATION

