

Operation to be carried out before painting.

Operator protection:

-
- obligatory hand protection,
- obligatory eye protection.

3. STUDS FOR RIVETING

Use when a thread on a bodywork component is damaged or when fitted on a new part.

Advantages:

-
- Fitting before or after painting.

Disadvantages:

-
- The support has to be drilled.
- Only for non-coated threads.

Operator protection:

-
- obligatory hand protection,
- obligatory eye protection.



Repair-00x03x04x12-02x21-2-1-1.xml




PRODUCTS AND EQUIPMENT FOR BONDED ASSEMBLY

1. RIGID GLUING


1- STANDARD RIGID ADHESIVE

Used to bond components to the structure.

Use also for crimping a door panel or wing.

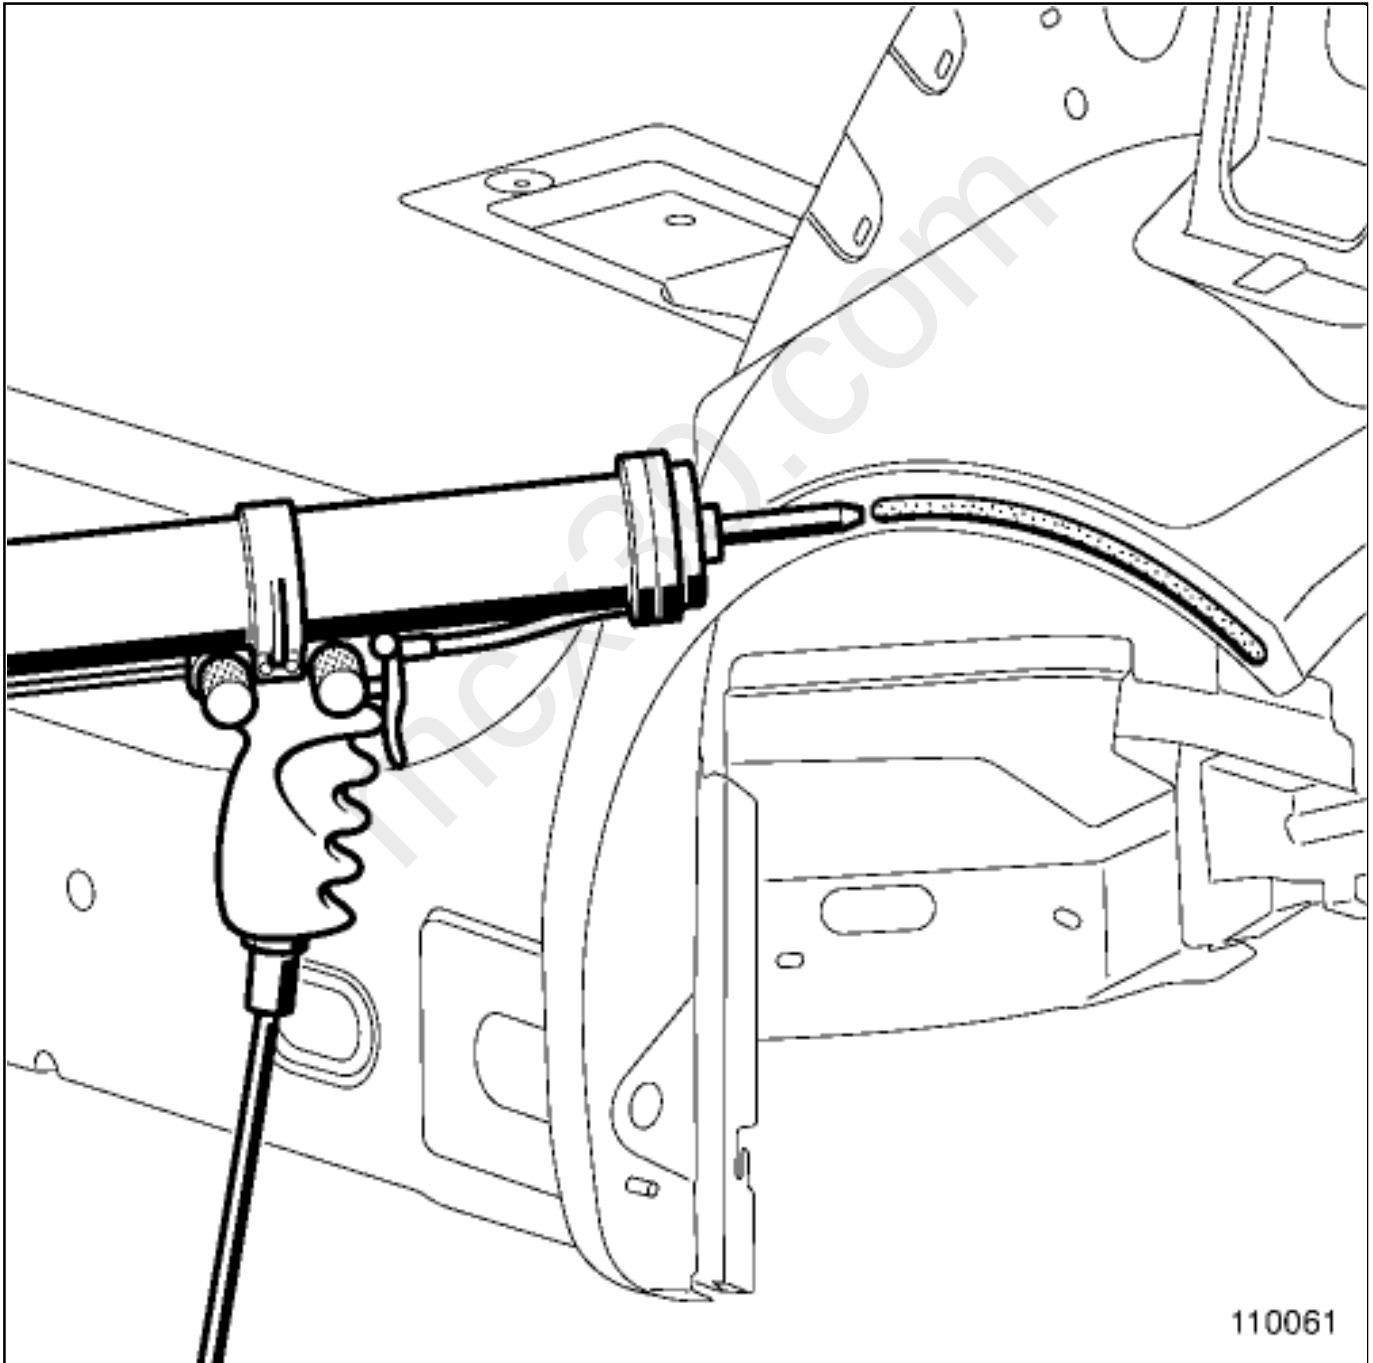

Used for bonding a roof in place of the laser weld.

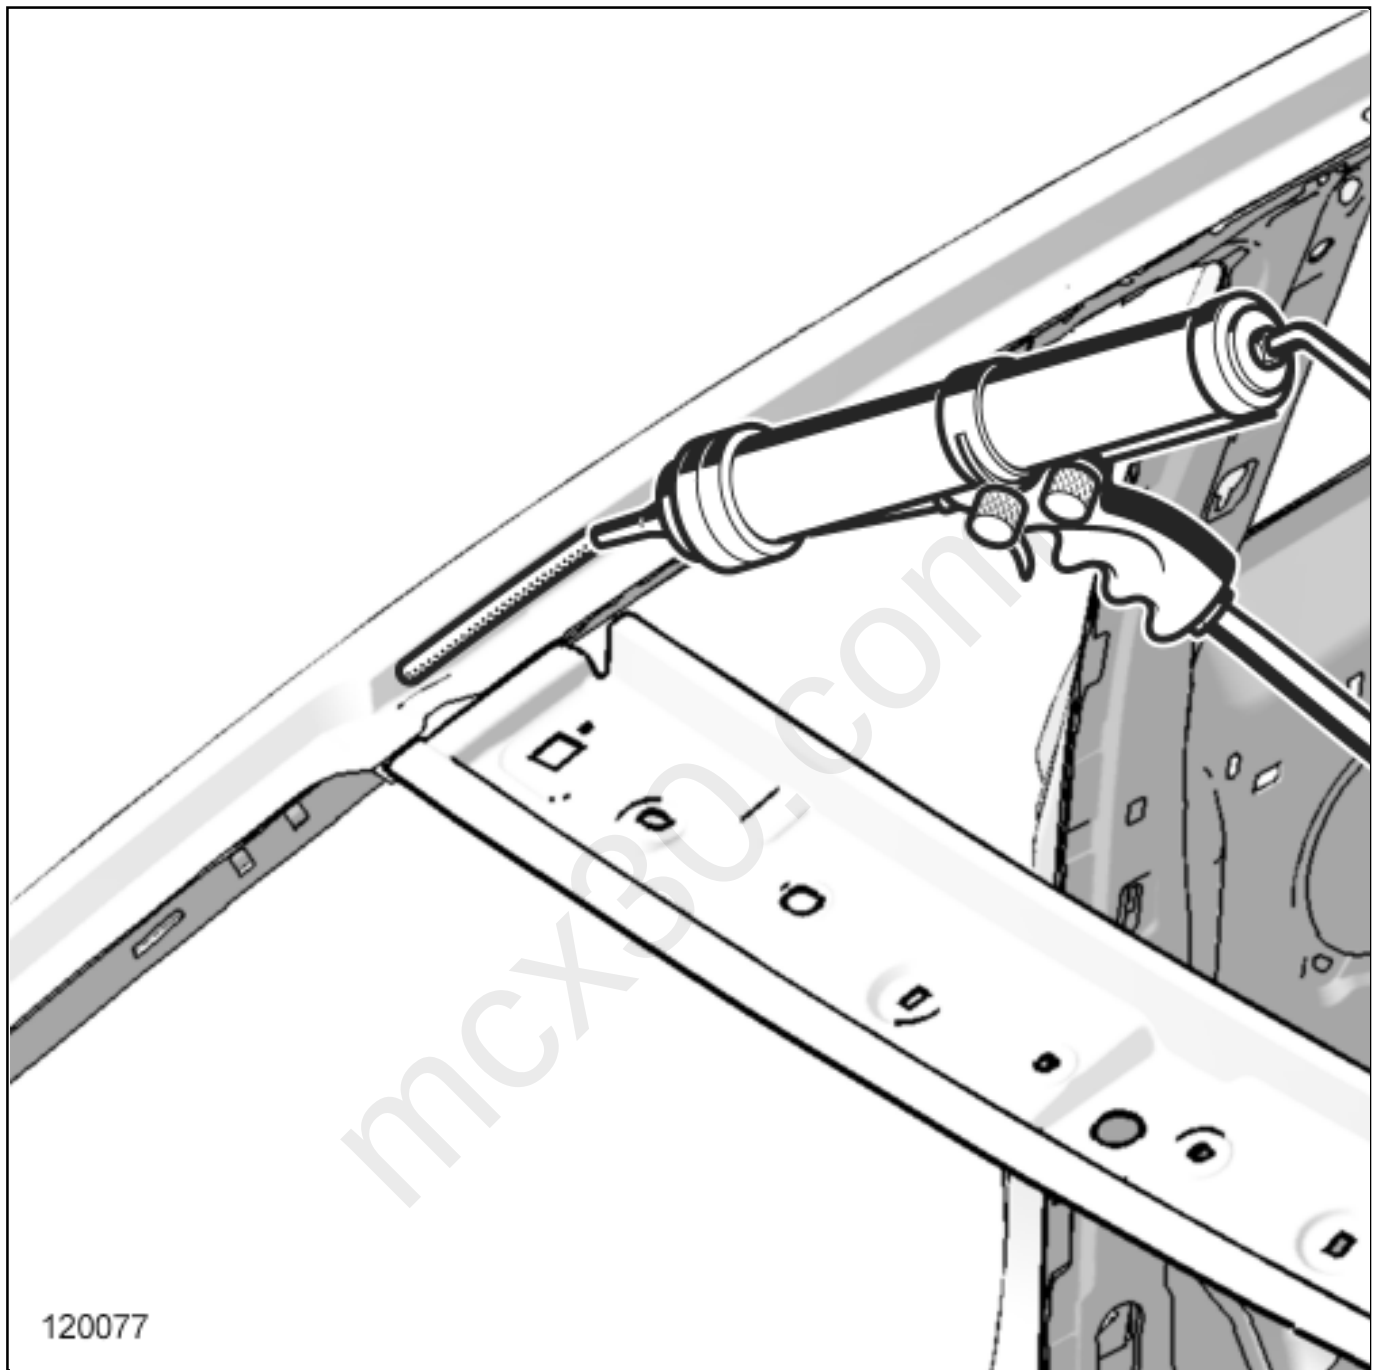

Advantages:

- Rigid assembly and good sealing.
- Rapid drying.
- Can be applied on an untreated sheet.

Disadvantage:

The mating surface must be clean, or it will become unstuck in time.

2. FLEXIBLE ADHESIVE

Use for positioning a part in place in relation to the structure, the adhesive serves as a shock absorber.

