

Never apply the cement bead onto wet primer.



Repair-00x03x04x27-02x21-1-2-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com

PROXIMITY SENSOR: PREPARATION AND PAINT RANGE



Note, one or more warnings are present in this procedure




CAUTION



The proximity sensors are fragile. Handle with care as the external part cannot withstand impacts.

When drying the bumper and/or proximity radars, the temperature must not exceed 60°C .

mcx30.com

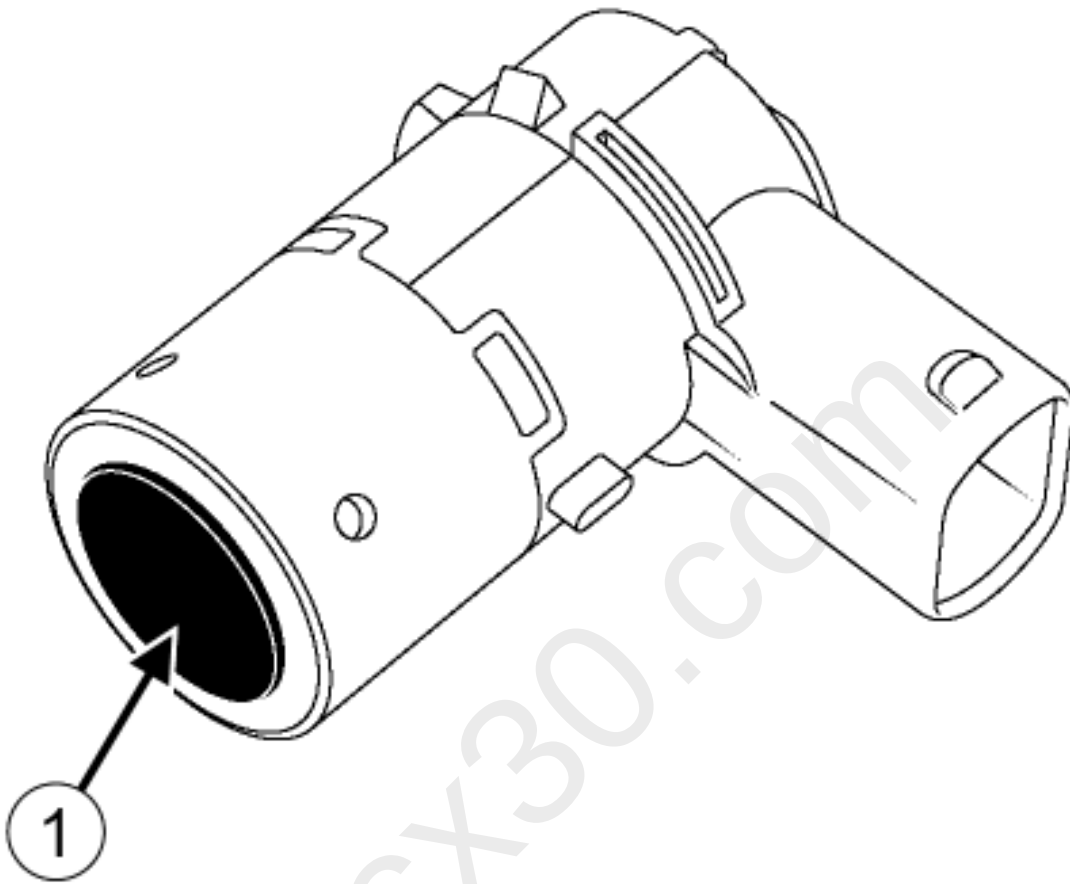

111313

The radar detects using a highly sensitive membrane(1) .

The sensitivity of the membrane may be affected by an unsuitable coating.

The radar will then detect false information or nothing at all.

1. PAINTING

Only proximity radars sold and prepared in the Parts Department can be painted.

Paint the proximity radars and the bumper separately.