

Torque tighten the cover nut16 N.m.



Remove the toolTool for removing and refitting rear axle rubber bushes .

## 2. FINAL OPERATION



Proceed in the reverse order to removal.



[Repair-13x02x05x12-01x37-1-24-1.xml](#)



XSL version : 3.02 du 22/07/11

mcx30.com

# REAR AXLE



Note, one or more warnings are present in this procedure



## 1. WHEEL ALIGNMENT: MEANING OF SYMBOLS

### CAUTION



Symbols used by RENAULT:




toe-out: -



toe-in: +

## 2. WHEEL ALIGNMENT

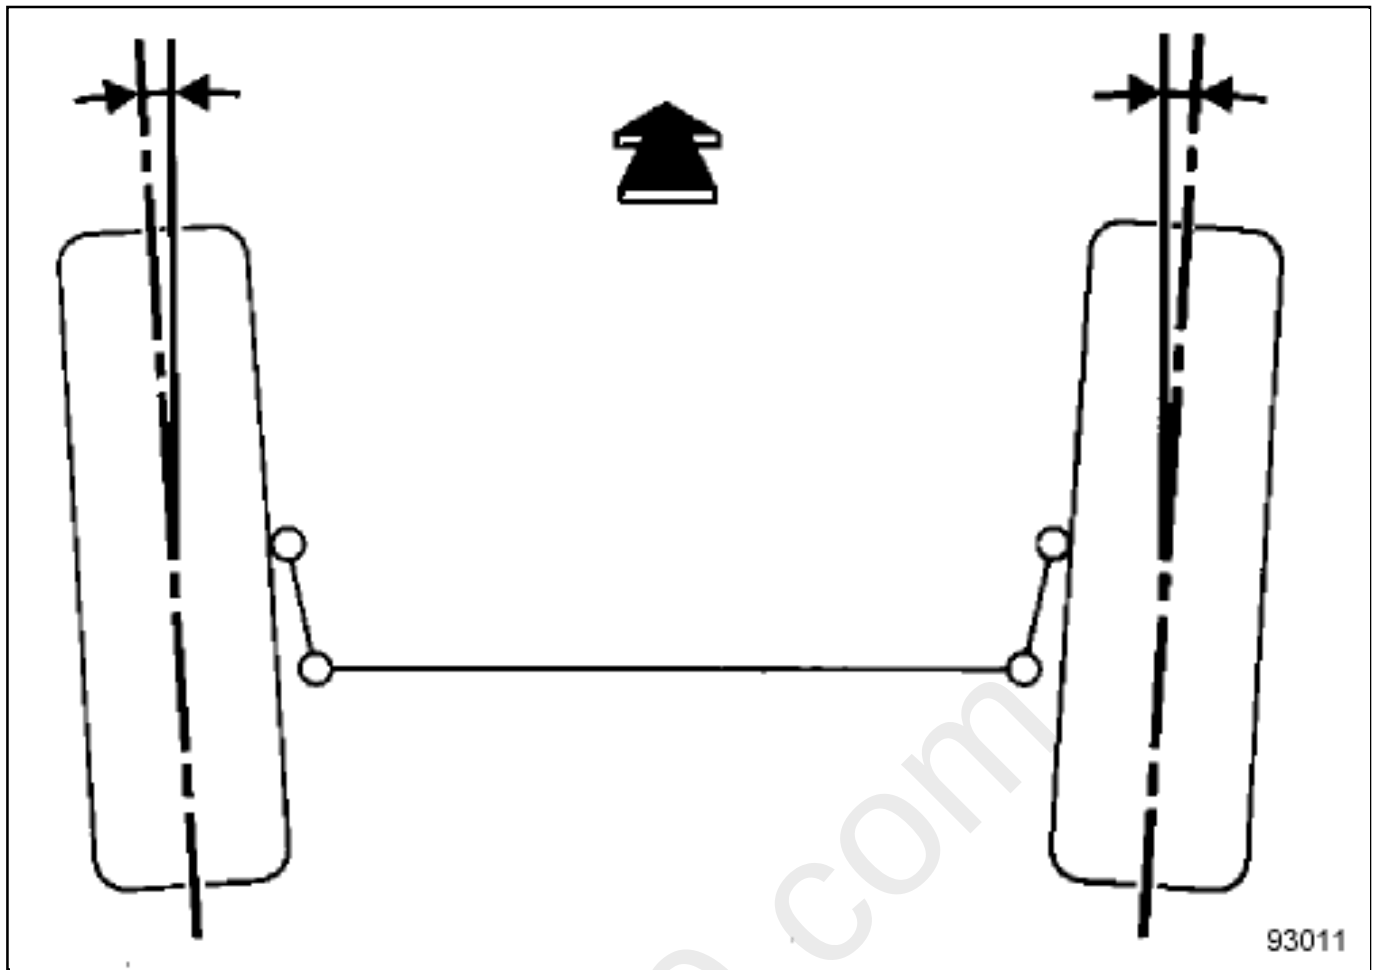

### 3. CAMBER