

1. REFITTING OPERATION



Refit:

-
- the rear impact lower cross member,
- the nuts.

2. FINAL OPERATION



Proceed in the reverse the reverse order to removal.




Repair-40x09x28-01x37-1-14-1.xml



XSL version : 3.02 du 22/07/11

REAR LIGHT ASSEMBLY: EXPLODED VIEW

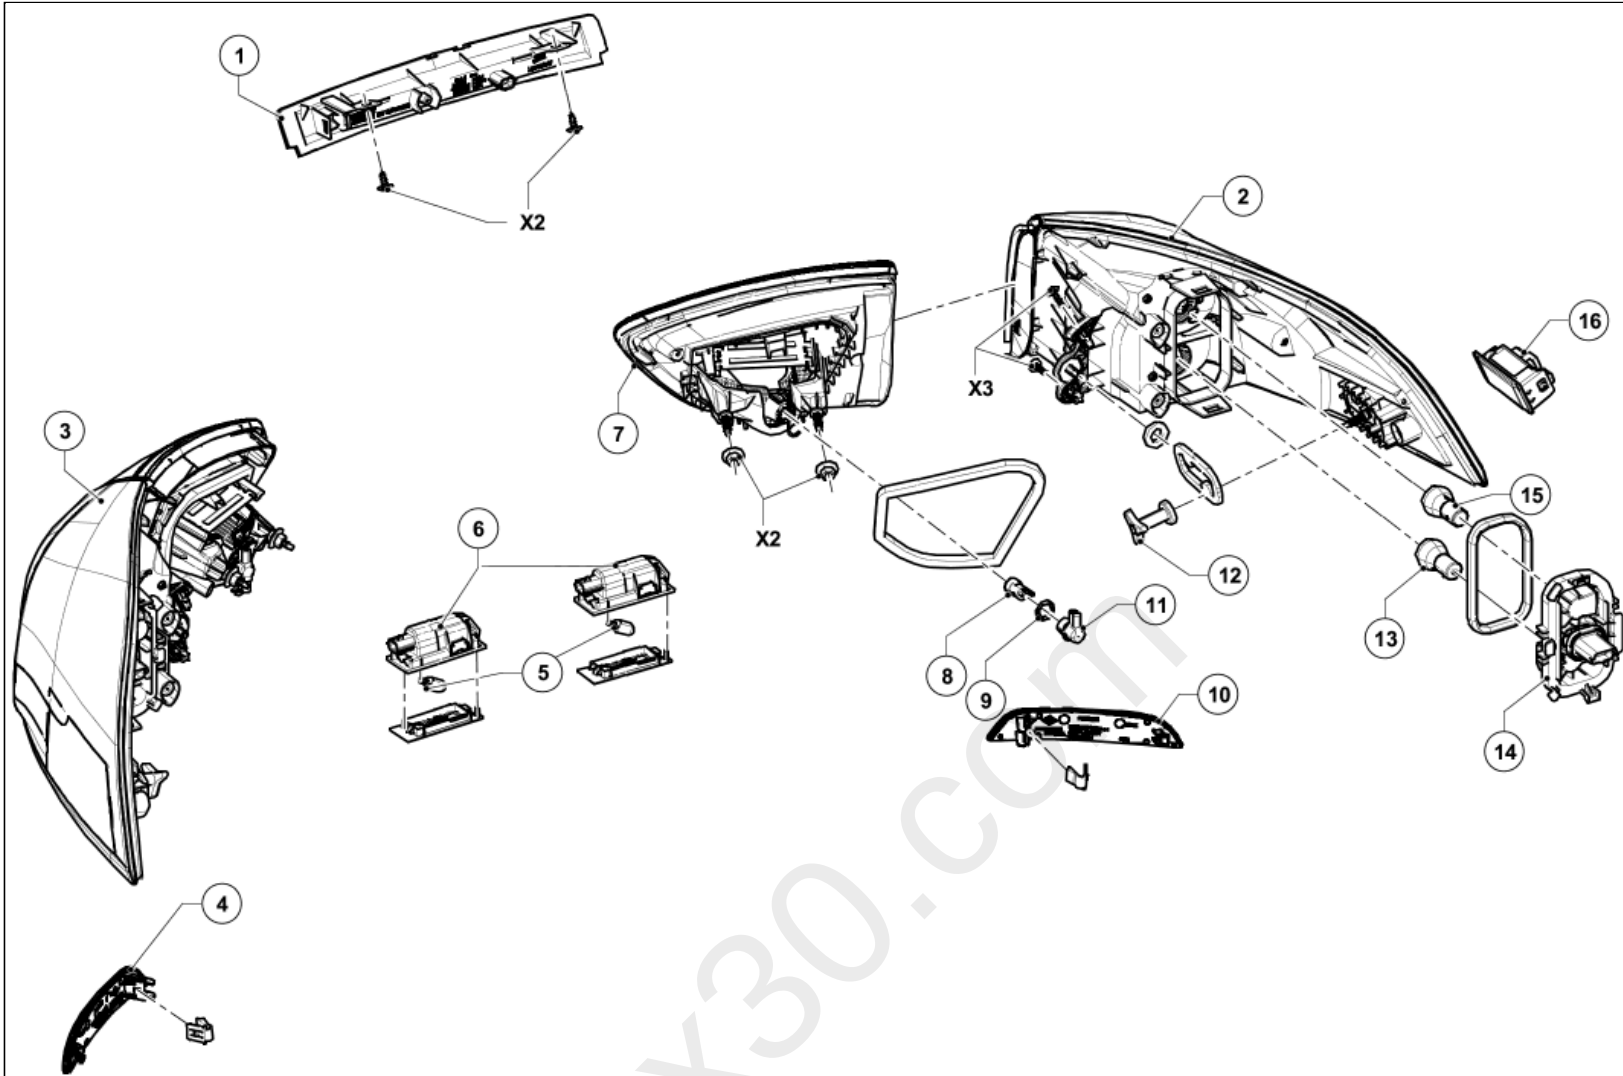

[Illustration key: Description](#) .

For fastenings with no specified tightening torque values, refer to the Table of Standard Torques [Tightening torques: General information](#) .