

the tailgate hinge nut on each side of the vehicle,

the tailgate (this operation requires two people).

4. REFITTING WITH HINGES

Proceed in the reverse order to removal.

Adjust the tailgate panel gaps([see 48A, Non-side opening elements, Rear opening element: Removal - Refitting](#)) .



Repair-40x10x25x01-01x37-1-3-1.xml




XSL version : 3.02 du 22/07/11

REAR OPENING ELEMENT TRIM: REMOVAL - REFITTING

REMOVAL

1. REMOVAL OPERATION

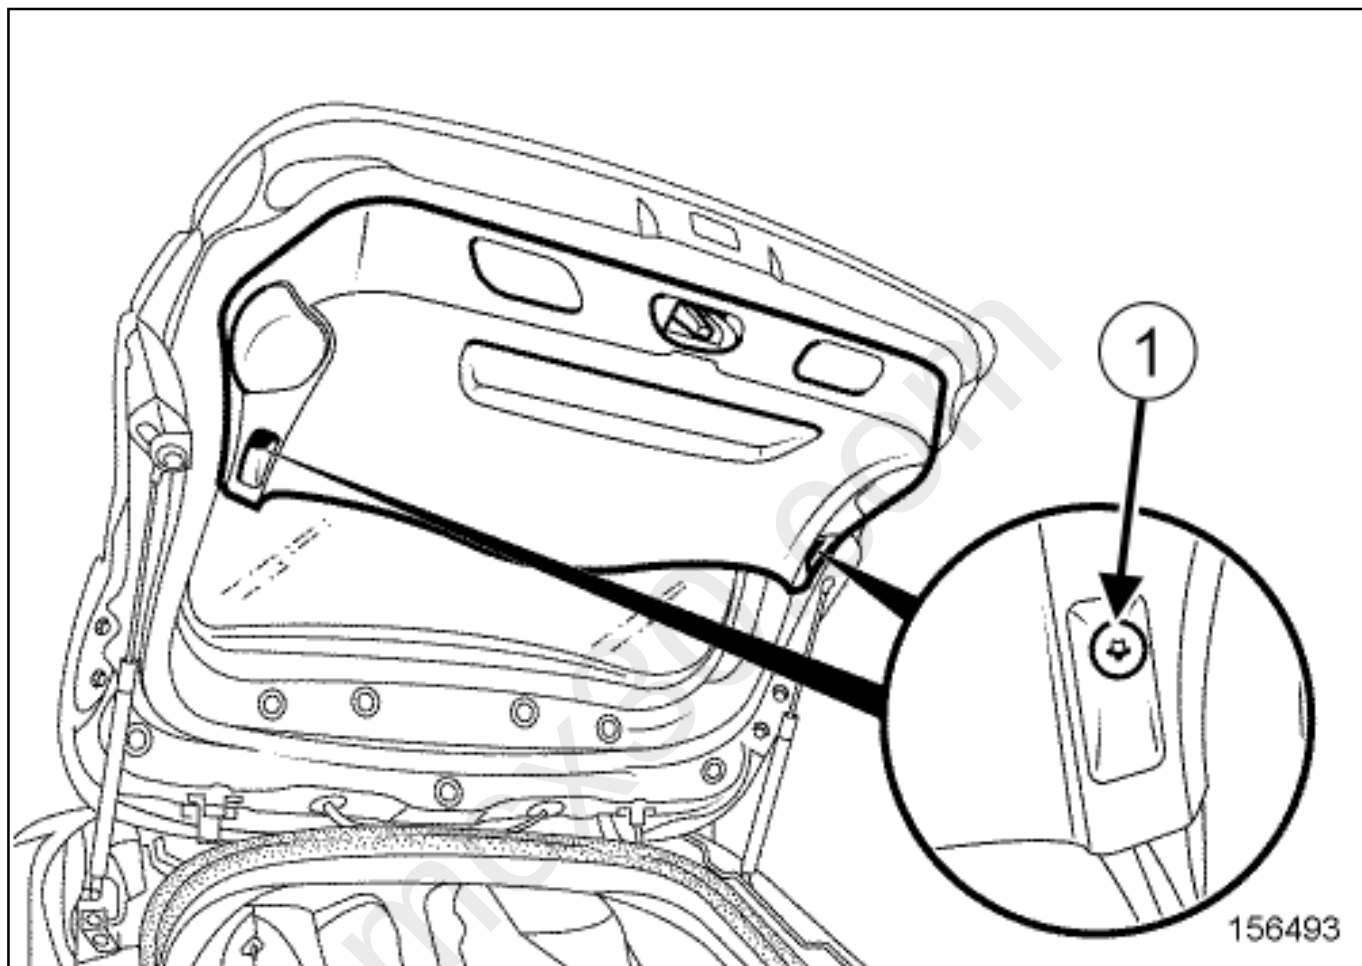

Remove:

- the screws(1) ,
- the rear opening element trim using a pair of unclipping pliers.

REFITTING

1. REFITTING PREPARATION OPERATION

-  Check the clips and replace them if necessary.