

Proceed in the reverse order to removal.



Carry out a function test.



Repair-50x04x12x02-01x37-1-34-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com

REAR SCREEN WIPER MOTOR: REMOVAL - REFITTING



Note, one or more warnings are present in this procedure



WARNING

Before carrying out any operation on a vehicle fitted with the Stop & Start system, always follow the safety instructions [Vehicle: Precautions for the repair](#)

REMOVAL


1. REMOVAL PREPARATION OPERATION

- Remove the lift the wiper arm [Wiping and washing: List and location of components](#) .


1- STEEL TAILGATE

- Remove the rear opening element trim [Rear opening element trim: Removal - Refitting](#) .

2- PLASTIC TAILGATE

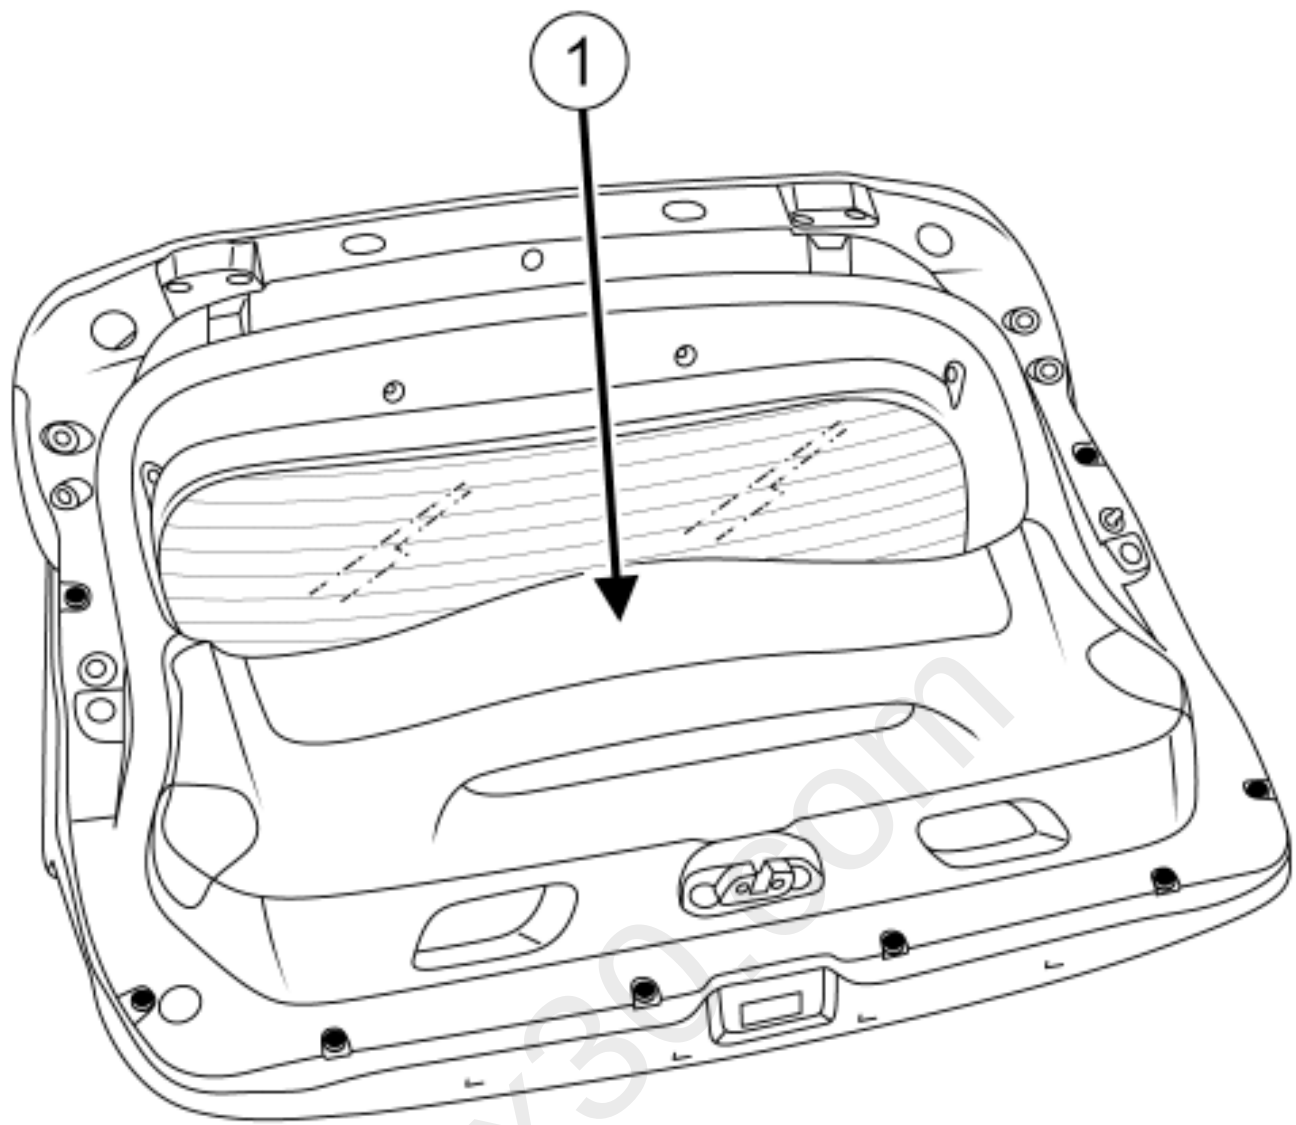

159901

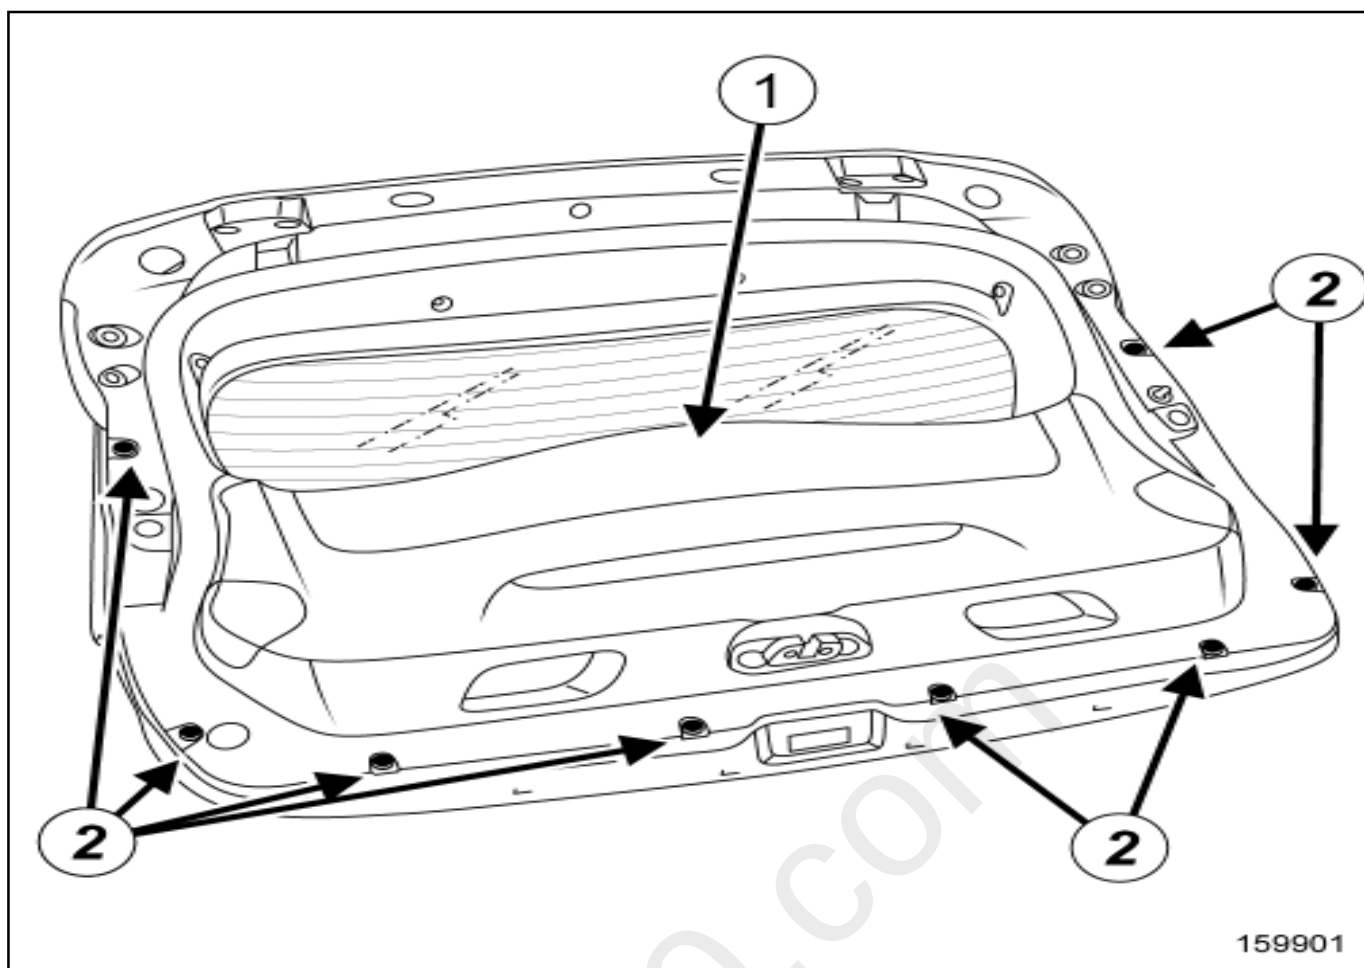


■ Unclip the tailgate trim inside(1) .

■ Remove:

- the tailgate trim exterior bolt,
- the tailgate trim exterior(2) .


2. REMOVAL OPERATION

1- STEEL TAILGATE

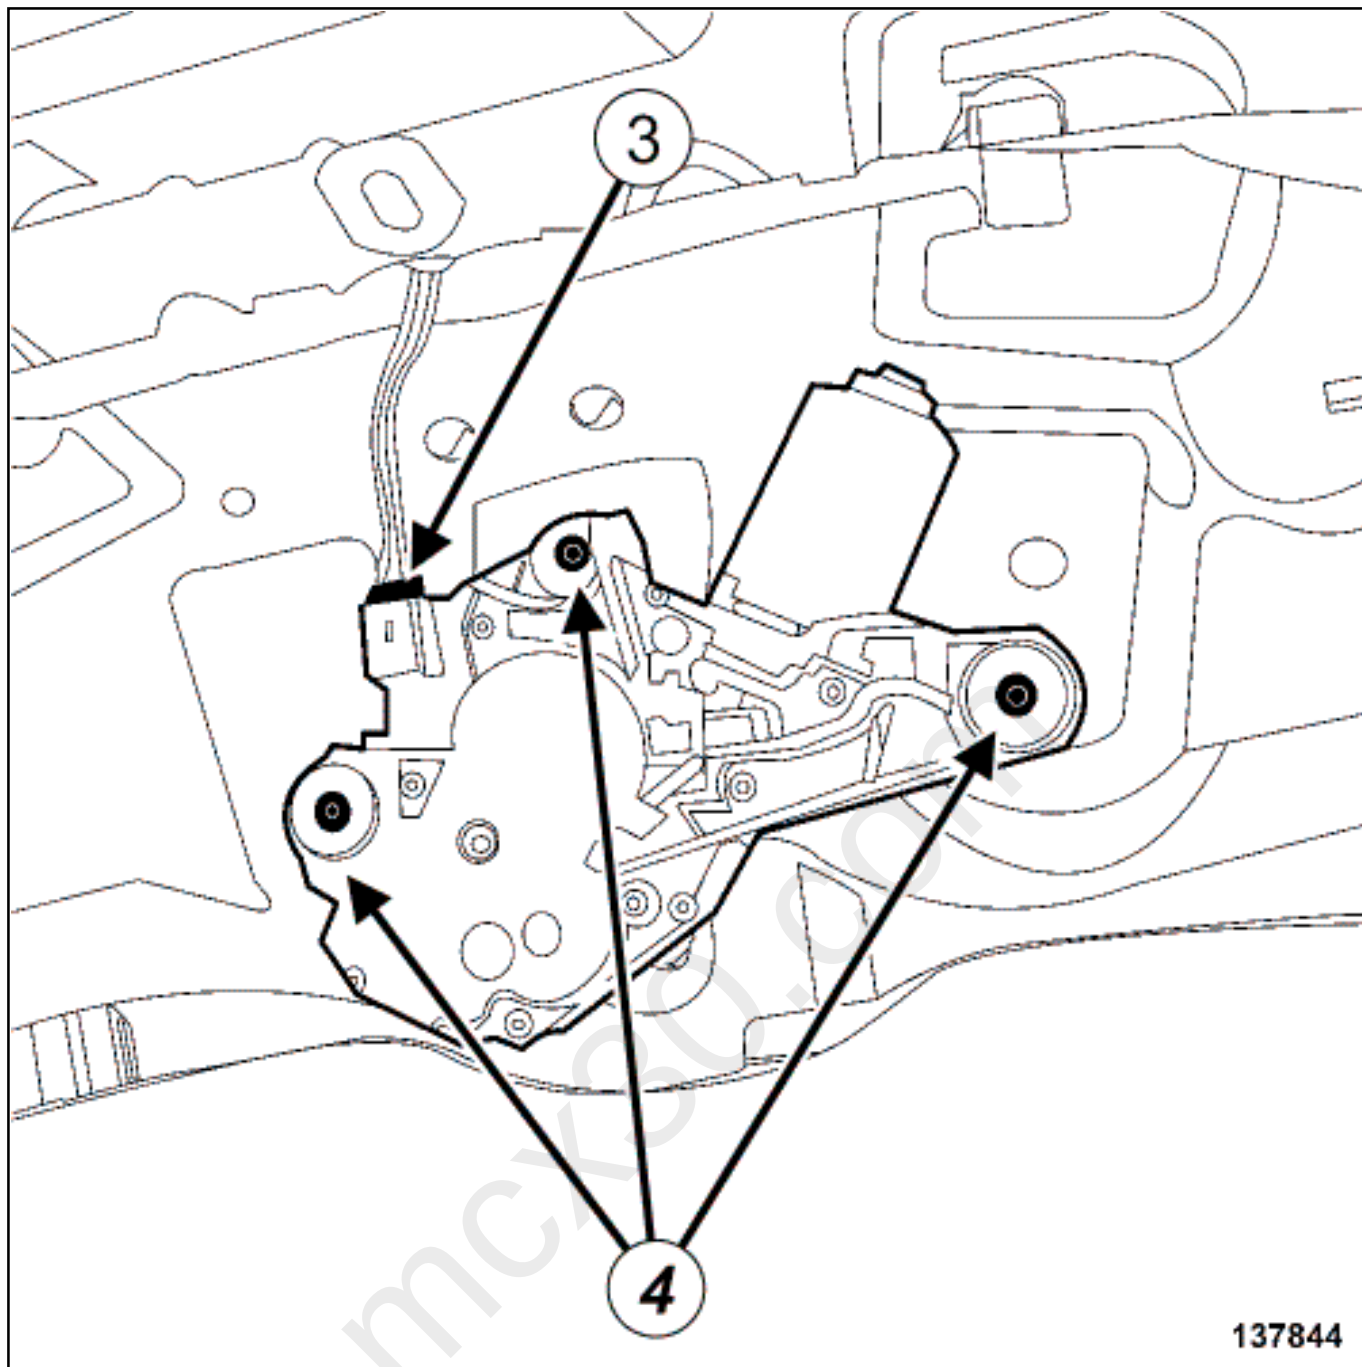


- Disconnect the rear screen wiper motor connector(3) .
- Remove the rivets(4) from the rear screen wiper motor.

2- PLASTIC TAILGATE

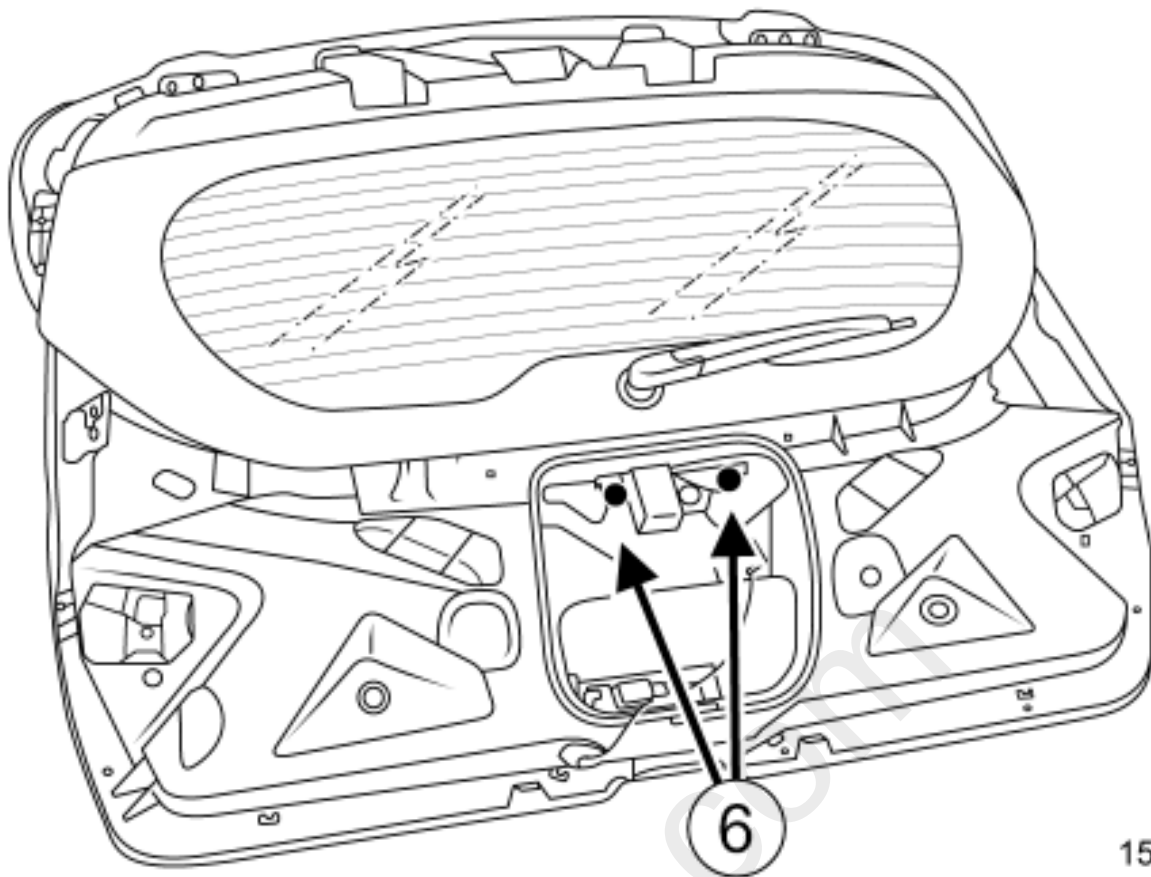

159899

mcx30.30

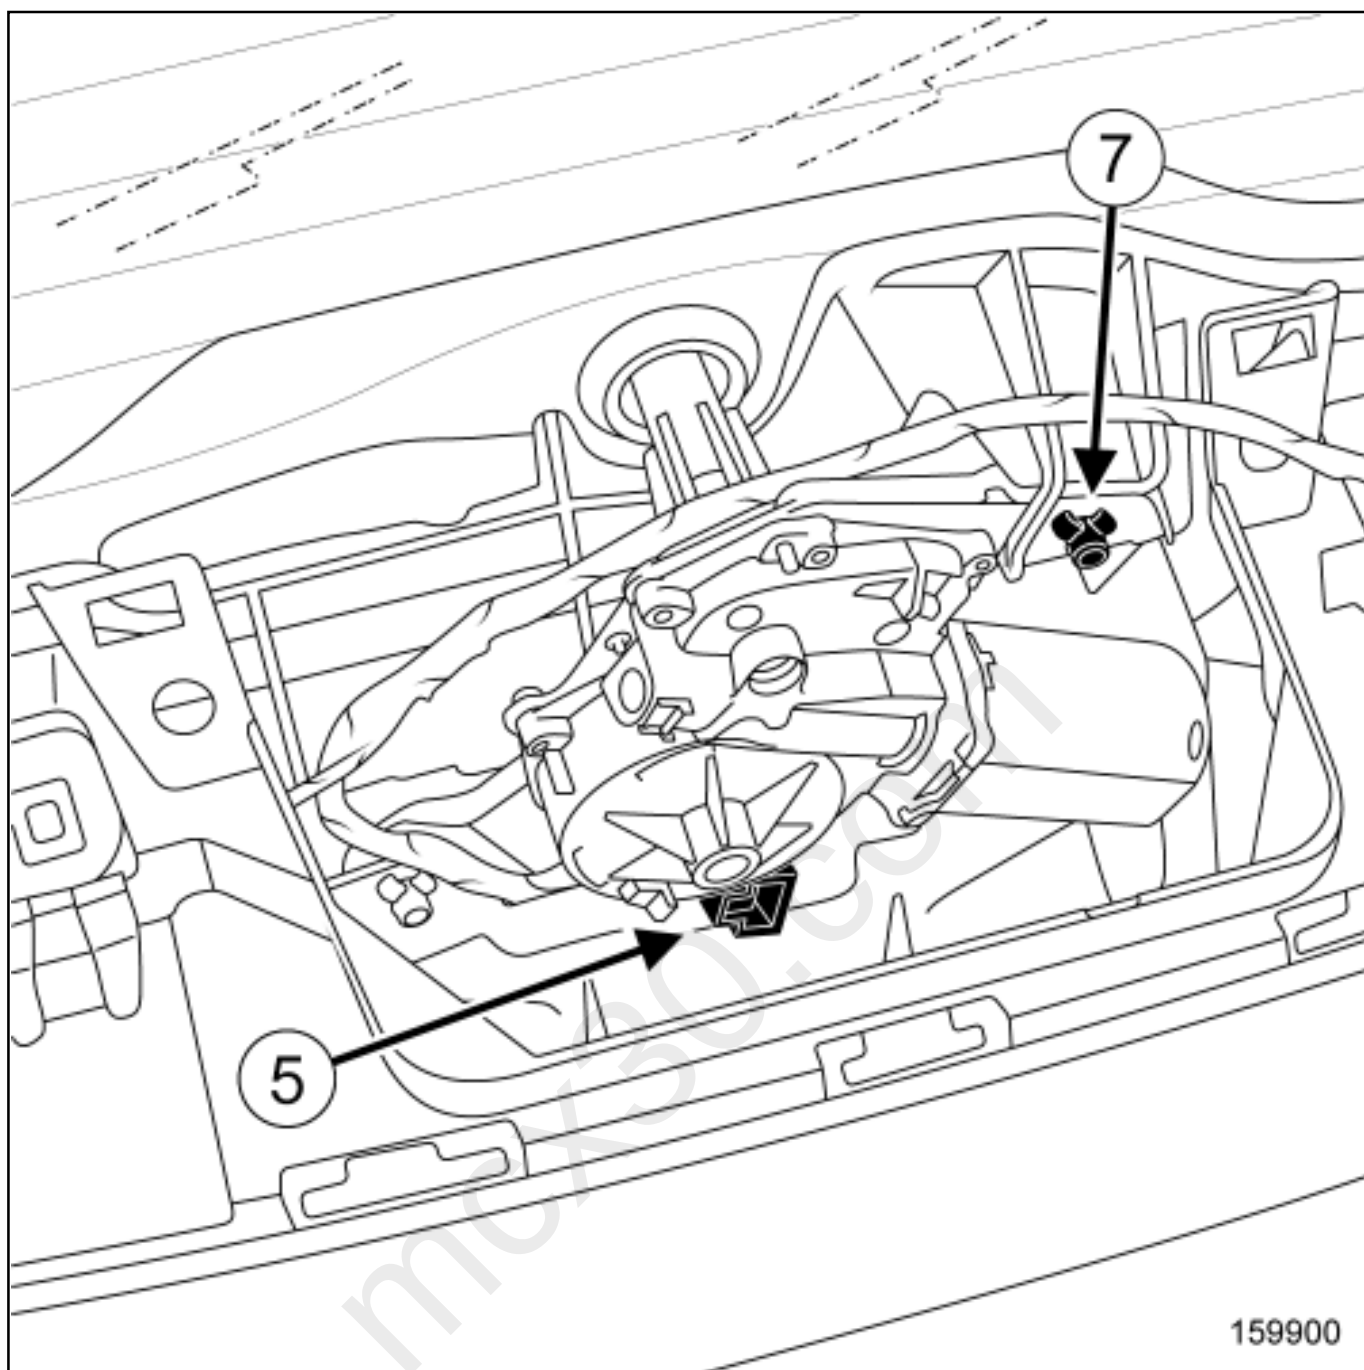

- Disconnect the rear screen wiper motor connector(5) .
- Remove the rivets(6) from the rear screen wiper motor
- Cut the rivet(7) using a cutting tool.