



Note:

Check that the windscreen and the scuttle panel grille are clean before refitting.



parts always to be replaced:

[clip under scuttle panel grille](#) .

## 2. REFITTING OPERATION



Proceed in the reverse order to removal.



[Repair-50x07x06x04-01x37-1-25-1.xml](#)



XSL version : 3.02 du 22/07/11


# SCUTTLE SIDE PANEL UPPER REINFORCEMENT: REPLACEMENT



Note, one or more warnings are present in this procedure



## 1. COMPOSITION OF THE SPARE PART

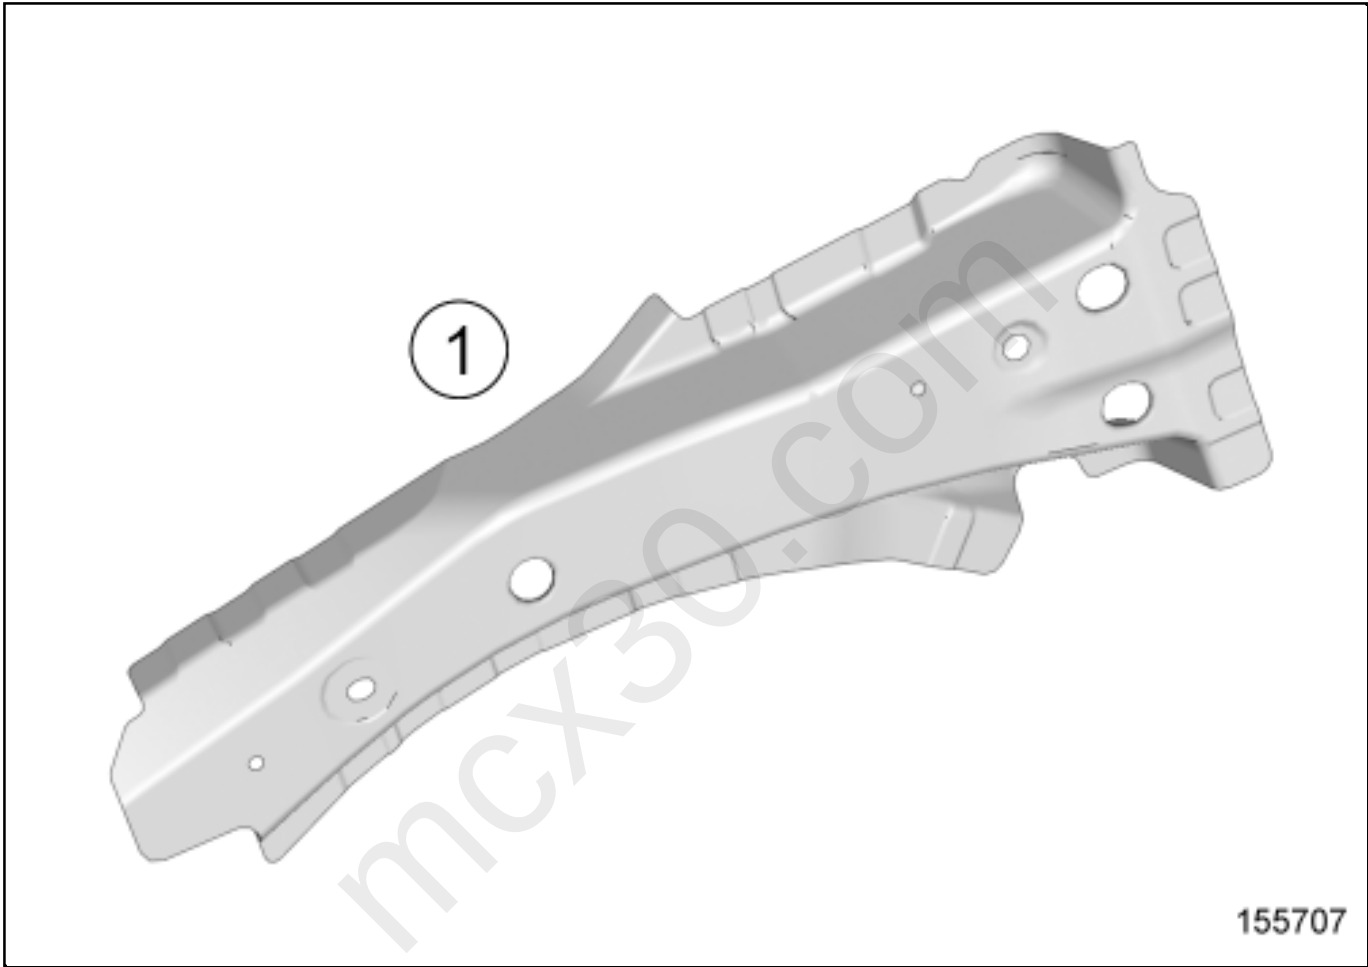

| No. | Description                      | Type | Thickness (mm) |
|-----|----------------------------------|------|----------------|
| (1) | Scuttle side panel reinforcement | HLE  | 1              |


## 2. IN THE EVENT OF REPLACEMENT

There is only one way of replacing this part:

complete replacement.

#### 1- COMPLETE REPLACEMENT

##### 1)PART IN POSITION

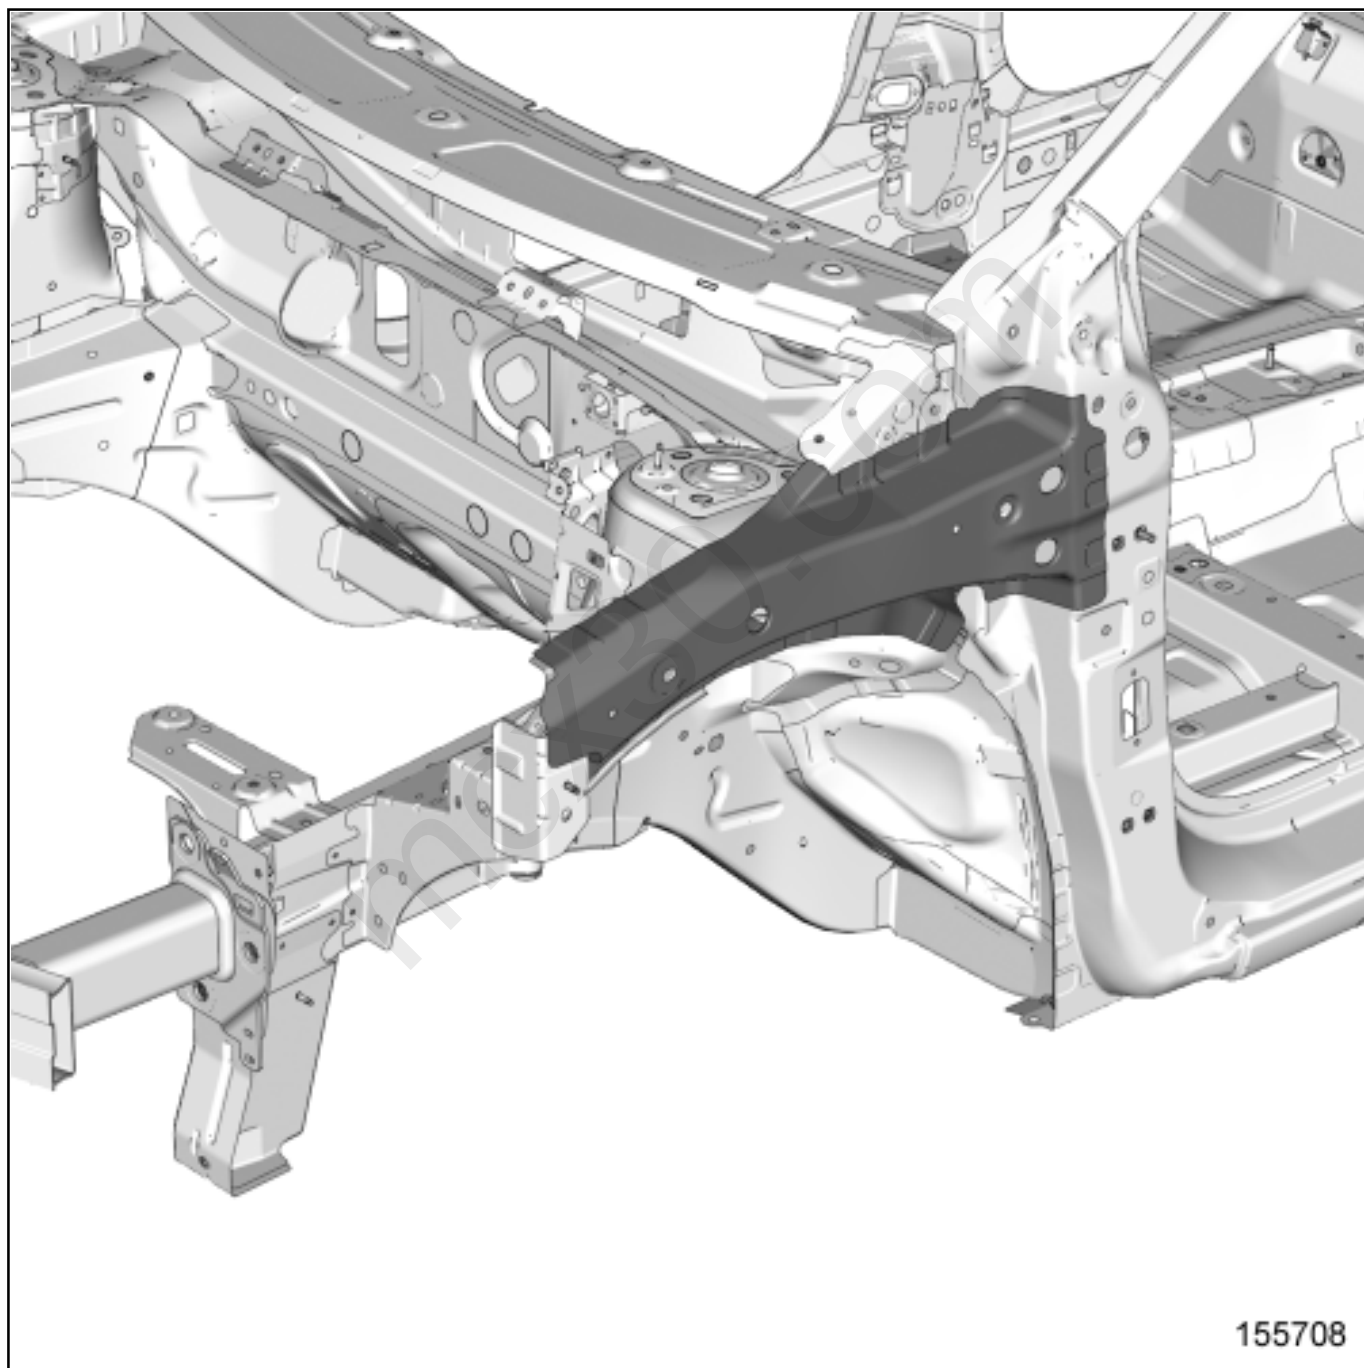

##### 2)POSITION OF ELECTRIC EARTHS