

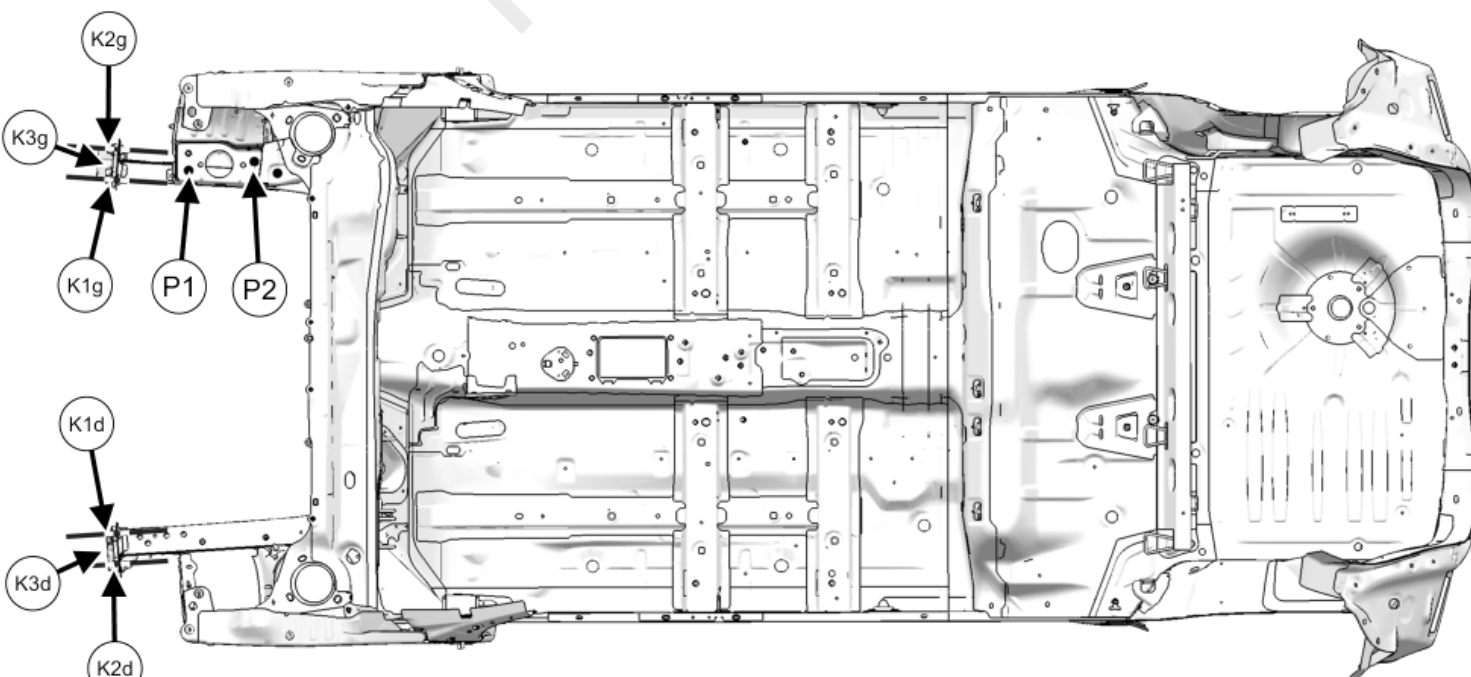


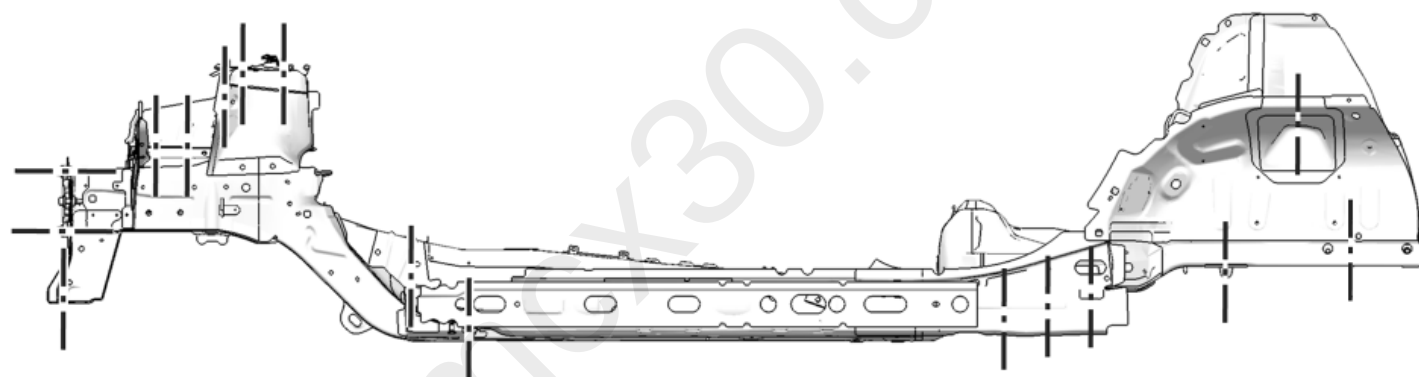

mcx30.com

mcx30.com


mcx30.com

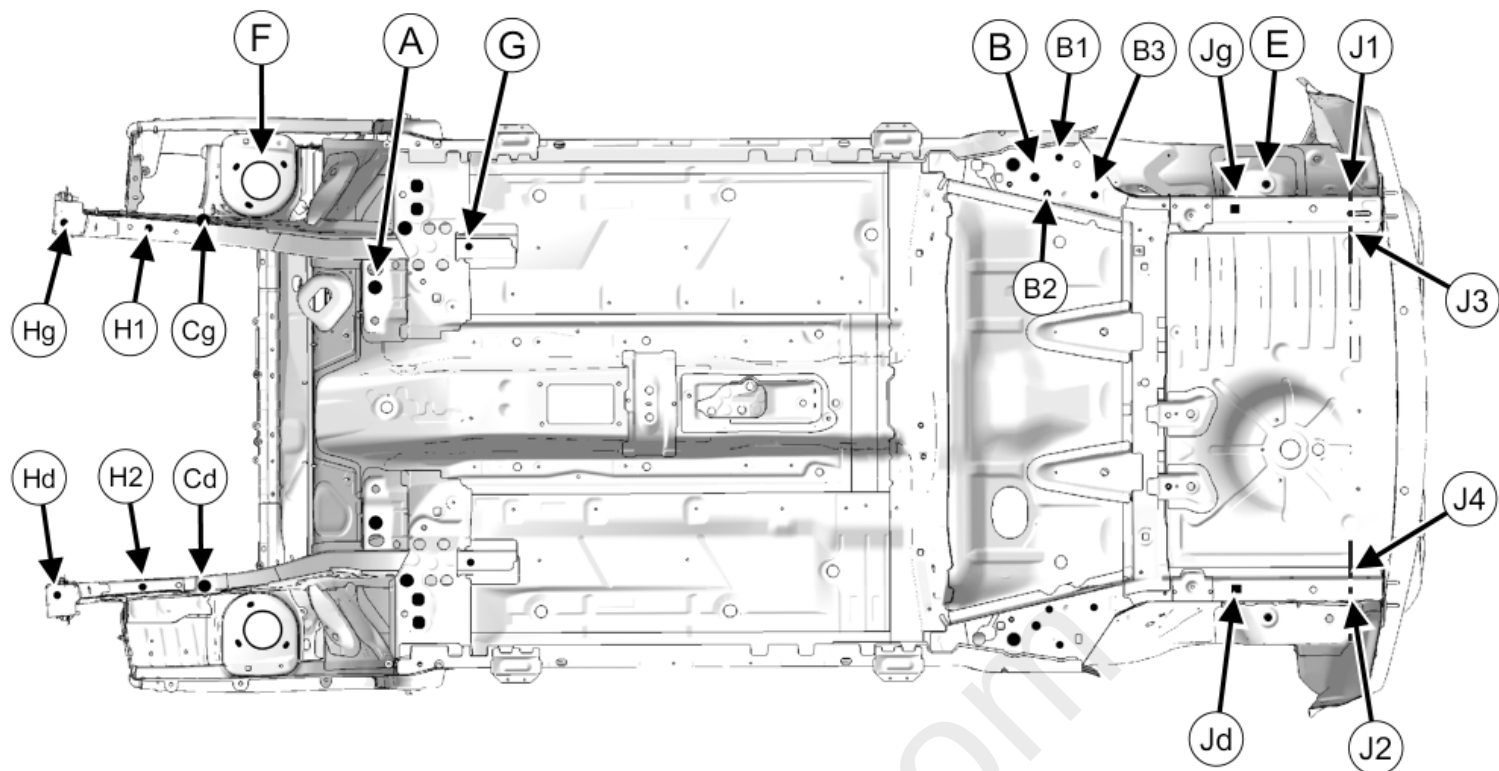


No.	Description	Dimension X	Dimension Y	Dimension Z	Diameter	Angle (in degrees)
(A)	Front sub-frame rear mounting without mechanical components	301	305	77.8	M12	
(A)	Front sub-frame rear mounting with mechanical components	301	305	6.70	M12	
(B)	Rear side member front leader pin	1920.9	-518.7	118	20 x 20	
(B1)	Rear axle assembly front mounting, without mechanical components	2077.3	-633	118	M10	
(B1)	Rear axle assembly front mounting, with mechanical components	2077.3	-633	113	M10	
(B2)	Rear axle assembly front mounting, without mechanical components	2015.4	-558.3	118	M10	
(B2)	Rear axle assembly front mounting, with mechanical components	2015.4	-558.3	113	M10	
(B3)	Rear axle assembly front mounting, without mechanical components	2166	-536	118	M10	
(B3)	Rear axle assembly front mounting, with mechanical components	2166	-536	113	M10	
(Cg)	Front subframe front left-hand mounting without mechanical components	-141.5	-478	260.5	M12	
(Cg)	Front subframe front left-hand mounting with mechanical components	-141.5	-478	195	M12	
(Cd)	Front subframe front right-hand mounting without mechanical components	141.5	468	256	M12	
(Cd)	Front subframe front right-hand mounting with mechanical components	141.5	468	190.5	M12	
(E)	Rear shock absorber upper mounting	2614.2	-561.9	536.4	Ø 20	
(F)	Front shock absorber upper stop	8.3	-582.5	671.7	Ø 33	
(G)	Front side member rear mounting	547	-410	9.8	Ø 16	
(Hd)	Front side member front leader pin	-303.5	471.3	292.8	16 x 16	
(Hg)	Front side member front leader pin	283.5	-460.8	292.8	16 x 16	
(H1)	Front side member front mounting without mechanical components	-502	-476	83.5	M12	
(H1)	Front side member front mounting with mechanical components	-502	-476	77.8	M12	
(H2)	Front side member front mounting without mechanical components	-525	492	83.5	M12	
(H2)	Front side member front mounting with mechanical components	-525	492	77.8	M12	
(Jg)	Rear side member rear leader pin	2533	-497.9	176.8	20 x 20	
(Jd)	Rear side member rear leader pin	2533	487.5	176.8	20 x 20	
(J1)	Rear side member rear mounting	2876	-529.4	220	Ø 24.5	90°
(J3)	Rear side member rear mounting	2876	-454	215	Ø 10.7	90°
(J2)	Rear side member rear mounting	2876	517.4	220	Ø 24.5	90°
(J4)	Rear side member rear mounting	2876	458	215	Ø 10.7	90°

(K1g)	Front end cross member mounting	-503.3	464.2	415	M10	90°
(K2g)	Front end cross member mounting	-497.8	542.4	340	M10	90°
(K3g)	Front end cross member mounting	-502.6	482.7	265	M10	90°
(K1d)	Front end cross member mounting	-503.6	-453.1	415	M10	90°
(K2d)	Front end cross member mounting	-497.5	-539.8	340	M10	90°
(K3d)	Front end cross member mounting	-501	-465.9	265	M10	90°
(P1)	Engine mounting	-310.2	492.5	491.4	M10	180°
(P2)	Engine mounting	-150.2	514.5	491.4	M10	180°

K98(K98)

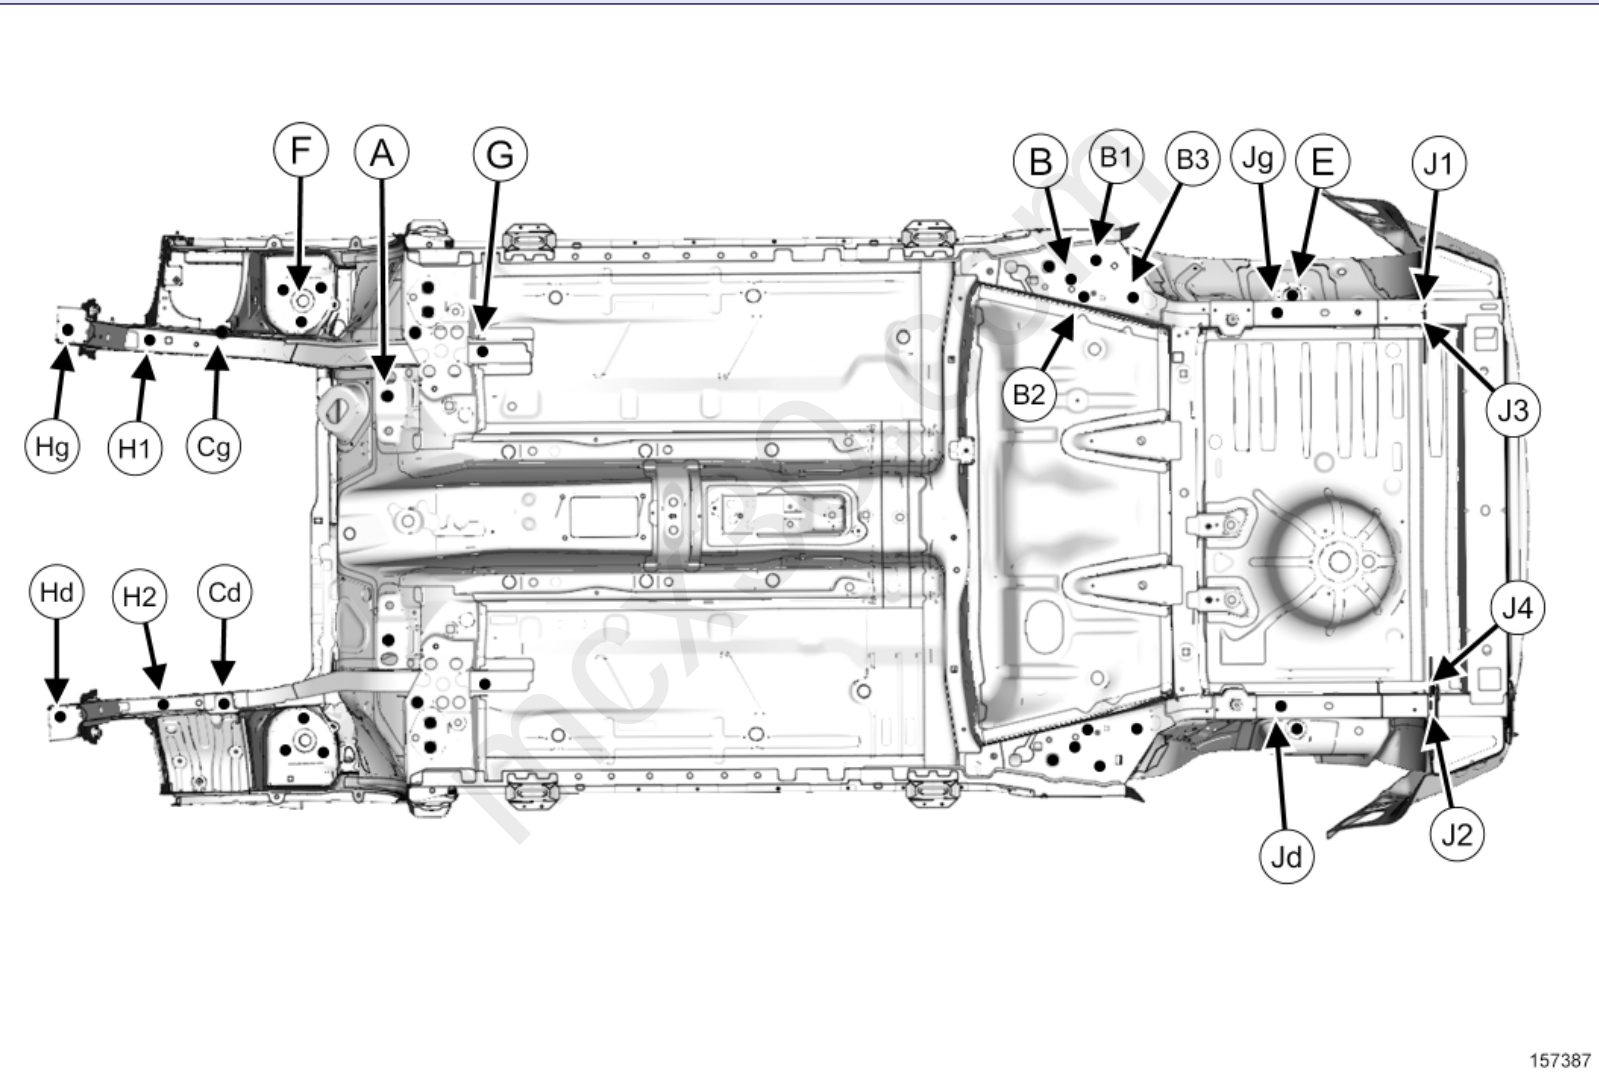

157387

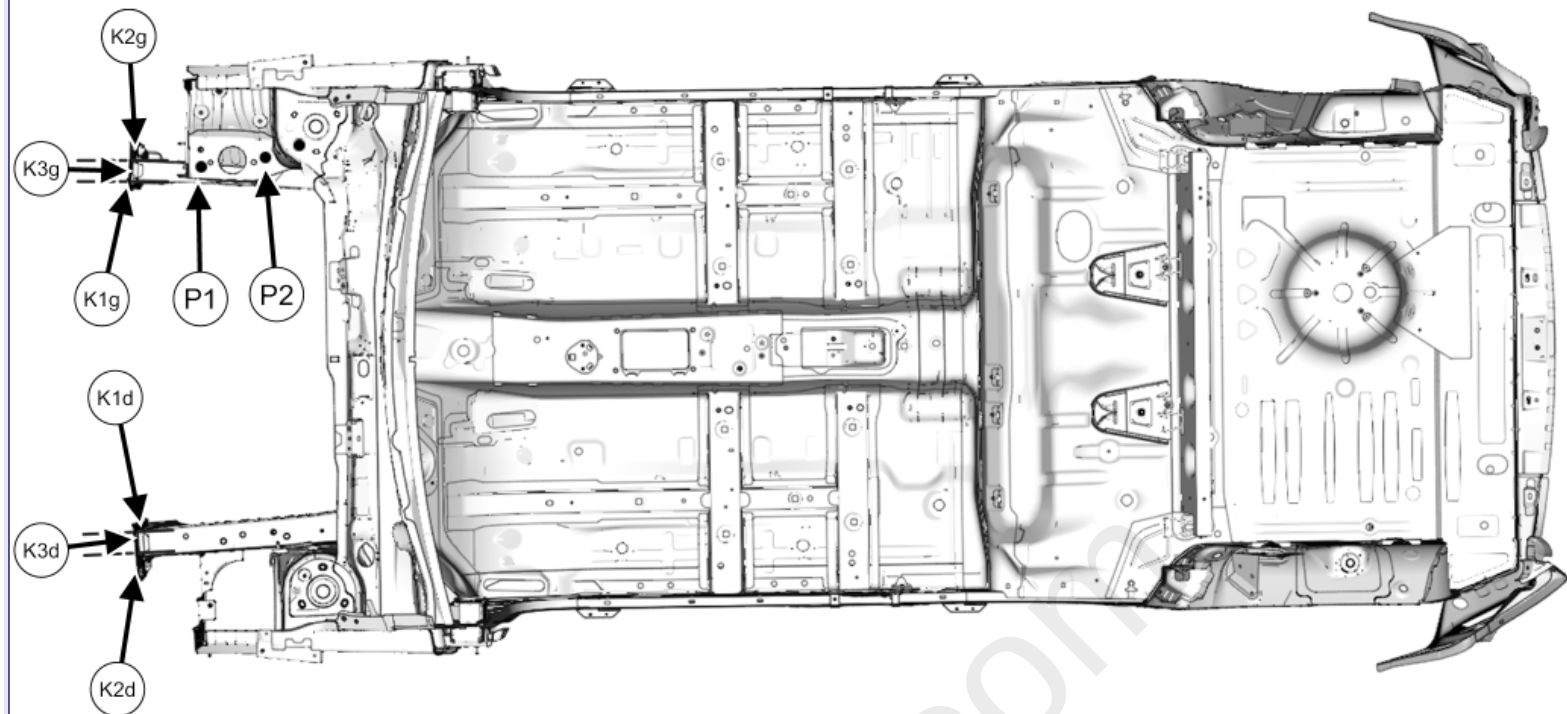

157388

No.	Description	Dimension X	Dimension Y	Dimension Z	Diameter	Angle (in degrees)
(A)	Front sub-frame rear mounting without mechanical components	301	305	77.8	M12	
(A)	Front sub-frame rear mounting with mechanical components	301	305	6.70	M12	
(B)	Rear side member front leader pin	1920.9	-518.7	118	20 x 20	
(B1)	Rear axle assembly front mounting, without mechanical components	2077.3	-633	118	M10	
(B1)	Rear axle assembly front mounting, with mechanical components	2077.3	-633	113	M10	
(B2)	Rear axle assembly front mounting, without mechanical components	2015.4	-558.3	118	M10	
(B2)	Rear axle assembly front mounting, with mechanical components	2015.4	-558.3	113	M10	
(B3)	Rear axle assembly front mounting, without mechanical components	2166	-536	118	M10	
(B3)	Rear axle assembly front mounting, with mechanical components	2166	-536	113	M10	
(Cg)	Front subframe front left-hand mounting without mechanical components	-141.5	-478	260.5	M12	
(Cg)	Front subframe front left-hand mounting with mechanical components	-141.5	-478	195	M12	