

31	Timing chain guide	(see 11A, Top and front of engine, Timing chain: Removal - Refitting)
32	Oil pump drive sprocket	
33	Timing chain guide bolts	25 N.m +/-4
34	Oil pump chain guide shaft	
35	Timing hydraulic tensioner	(see 11A, Top and front of engine, Timing chain: Removal - Refitting)
36	Timing hydraulic tensioner bolts	10 N.m +/-2
37	Inlet timing dephaser bolt	10 N.m +/-2
38	Inlet camshaft dephaser solenoid valve	(see 11A, Top and front of engine, Camshaft dephaser solenoid valve: Removal - Refitting)
39	Timing cover seal	
40	Timing chain tensioning guide shaft	



Repair-10x02x04-02x50-1-3-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com

TIMING CHAIN: REMOVAL-REFITTING



Note, one or more warnings are present in this procedure



Equipment required

component support



parts always to be replaced:



Timing chain



WARNING

Before carrying out any operation on a vehicle fitted with the Stop & Start system, always follow the safety instructions [Vehicle: Precautions for the repair](#)



WARNING



To avoid all risk of damage to the systems, apply the safety and cleanliness instructions and operation recommendations before carrying out any repair:



[Engine: Precautions for the repair](#) ,



[Vehicle: Precautions for the repair](#) .

CAUTION



It is strictly forbidden to apply any pressure to the engine oil sump. Damage to the sump will irreparably damage the engine by:



blocking the strainer,



raising the oil level above maximum, with a risk of engine racing.

REMOVAL

1. REMOVAL PREPARATION OPERATION



Remove the "engine and gearbox" assembly([see 10A, Engine and cylinder block assembly, Engine - gearbox assembly: Removal - Refitting](#)) .



Separate the manual gearbox from the engine([see Manual gearbox: Removal - Refitting](#)) .



Separate the automatic gearbox from the engine([see 23A, Automatic gearbox , Automatic gearbox: Removal - Refitting](#)) .



Position the engine on the component support([Engine support equipment: Use](#)) .



Drain the engine([see Engine oil: Draining - Refilling](#)) .



Loosen the bolts of the coolant pump pulley([see 10A, Engine and cylinder block assembly, Cylinder block assembly: Exploded view](#)) .



Remove:



■ the accessories belt([see 11A, Top and front of engine, Engine accessories assembly: Exploded view](#)) ,

■ the coolant pump pulley bolts([see 10A, Engine and cylinder block assembly, Cylinder block assembly: Exploded view](#)) ,

■ the coolant pump pulley([see 10A, Engine and cylinder block assembly, Cylinder block assembly: Exploded view](#)) ,

■ the design cover bolts([see 11A, Top and front of engine, Cylinder head assembly: Exploded view](#)) ,

■ the design cover([see 11A, Top and front of engine, Cylinder head assembly: Exploded view](#)) ,

■ the ignition coils([see 11A, Top and front of engine, Cylinder head assembly: Exploded view](#)) ,

■ the upstream oxygen sensor([see 19B, Exhaust, Exhaust assembly in engine compartment: Exploded view](#)) ,

■ the upper turbo-manifold heat shield, rear bolt([see 19B, Exhaust, Exhaust assembly in engine compartment: Exploded view](#)) ,

■ the upper turbo-manifold heat shield, upper bolts([see 19B, Exhaust, Exhaust assembly in engine compartment: Exploded view](#)) ,

■ the upper turbo-manifold heat shield([see 19B, Exhaust, Exhaust assembly in engine compartment: Exploded view](#)) ,

■ the gasoline inlet high pressure pipe to high pressure rail bolt([see 17B, Petrol injection, Petrol injection](#)) ,

■ the gasoline inlet high pressure pipe to high pressure rail([see 17B, Petrol injection, Petrol injection](#)) ,

■ the gasoline high pressure pump bolts([see 17B, Petrol injection, Petrol injection](#)) ,

■ the gasoline high pressure pump([see 17B, Petrol injection, Petrol injection](#)) ,

■ the gasoline high pressure pump lifter([see 17B, Petrol injection, Petrol injection](#)) ,

■ the gasoline high pressure pump seal([see 17B, Petrol injection, Petrol injection](#)) ,

the inlet camshaft position sensor bolt([see 11A, Top and front of engine, Cylinder head assembly:](#)

[Exploded view \)](#) ,

the inlet camshaft position sensor([see 11A, Top and front of engine, Cylinder head assembly: Exploded view \)](#) ,

the exhaust position sensor bolt([see 11A, Top and front of engine, Cylinder head assembly: Exploded view \)](#) ,

the exhaust position sensor([see 11A, Top and front of engine, Cylinder head assembly: Exploded view \)](#) ,

the cylinder head cover([see 11A, Top and front of engine, Cylinder head assembly: Exploded view \)](#) ,

the crankshaft accessories pulley([see 11A, Top and front of engine, Engine accessories assembly: Exploded view \)](#) ,

the crankshaft seal on timing end([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,

the inlet timing dephaser bolt([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,

the inlet timing dephaser([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,

the exhaust camshaft dephaser solenoid valve bolt([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,


the exhaust camshaft dephaser solenoid valve([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,

the camshaft dephaser oil supply cover bolts([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,


the camshaft dephaser oil supply cover([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,

the camshaft dephaser oil supply cover seal([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) ,


the timing cover bolts([see 11A, Top and front of engine, Timing assembly: Exploded view \)](#) .

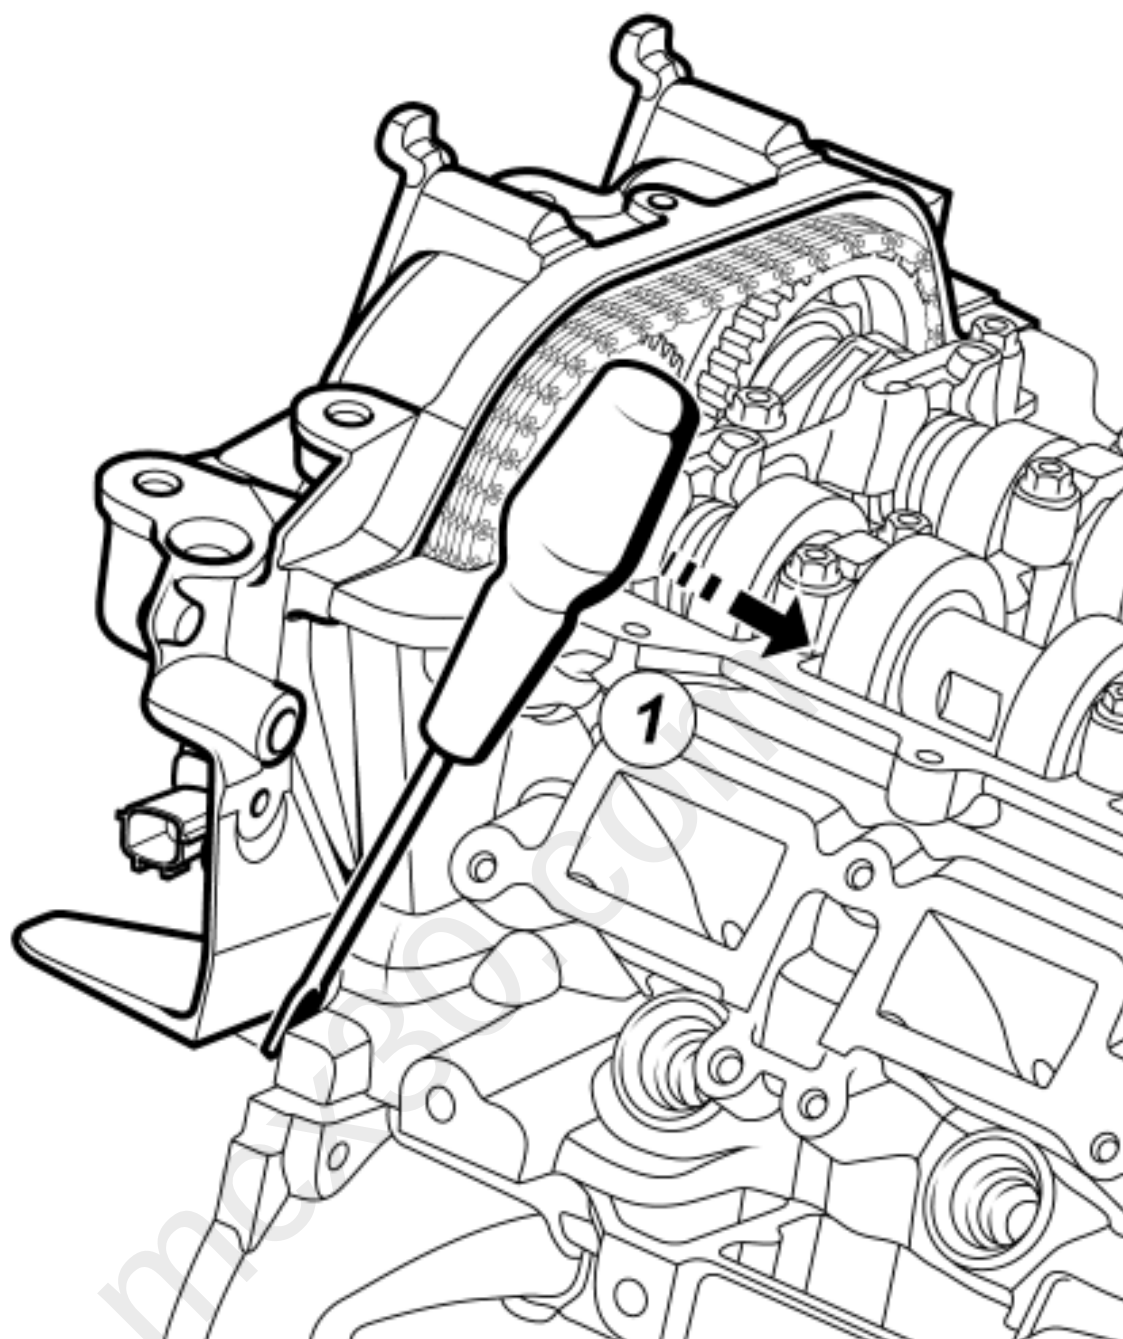

160261

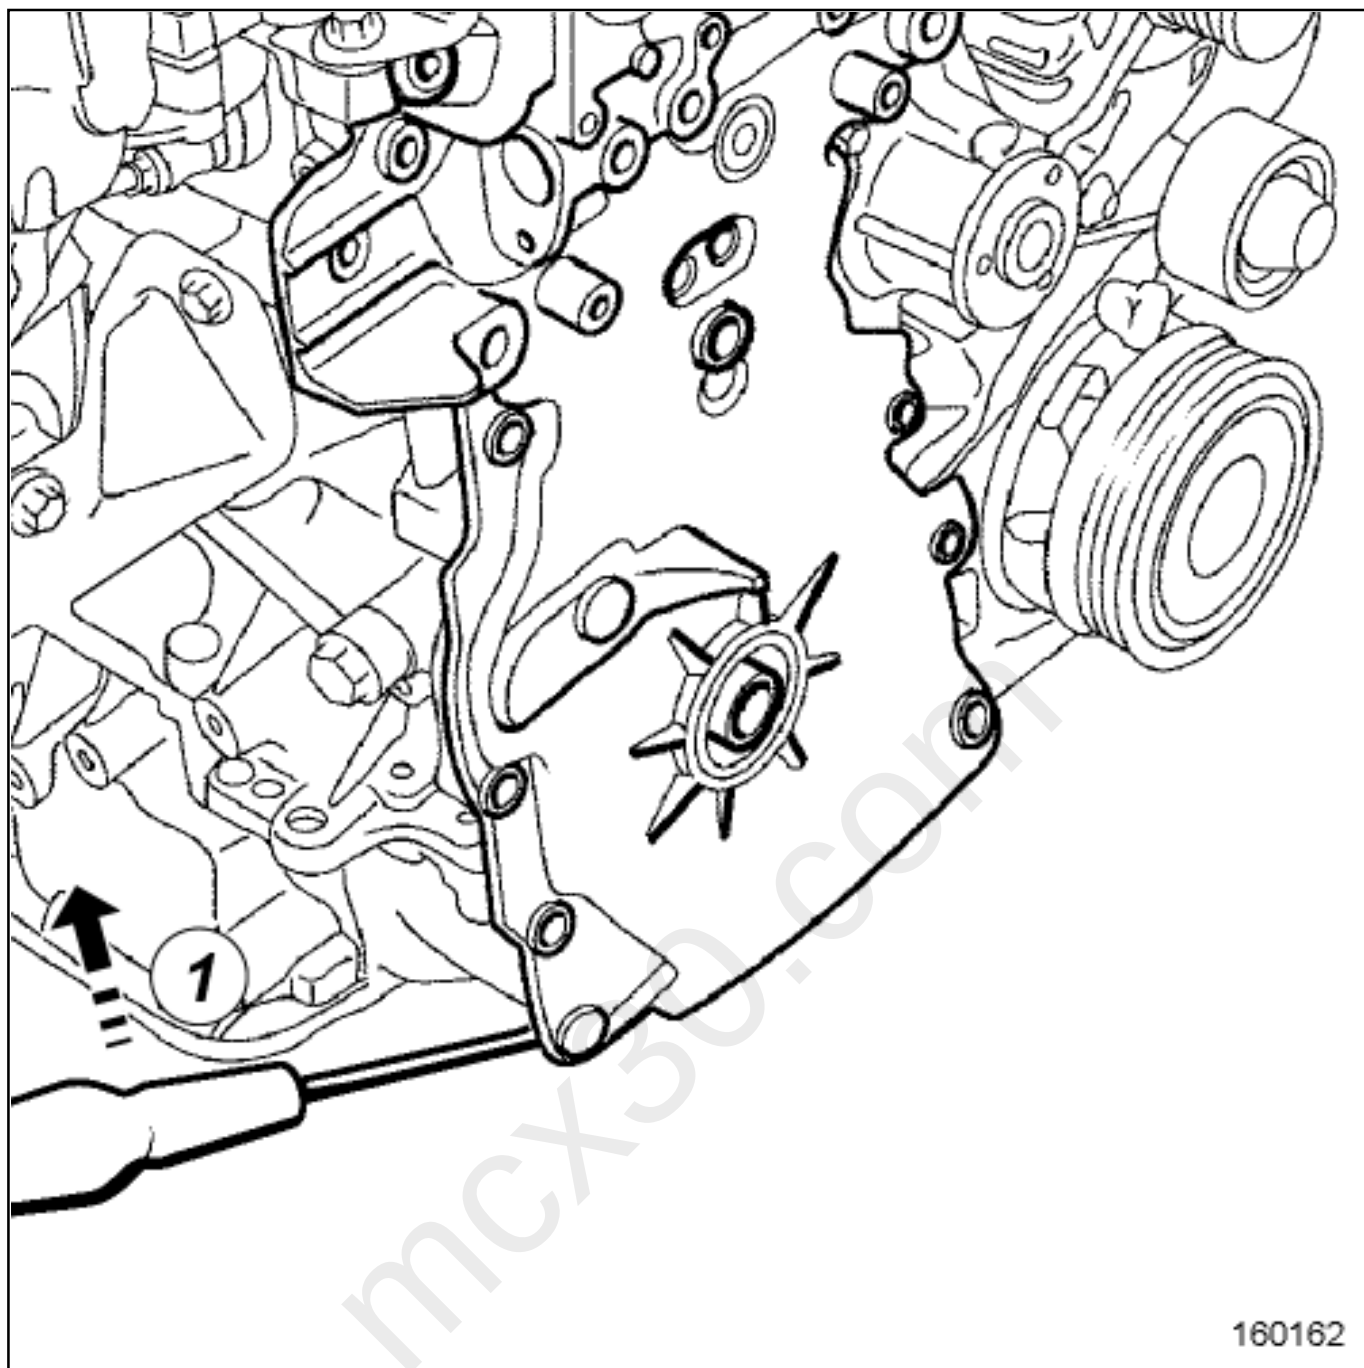


Very carefully separate the timing cover using a flat-blade screwdriver(1)

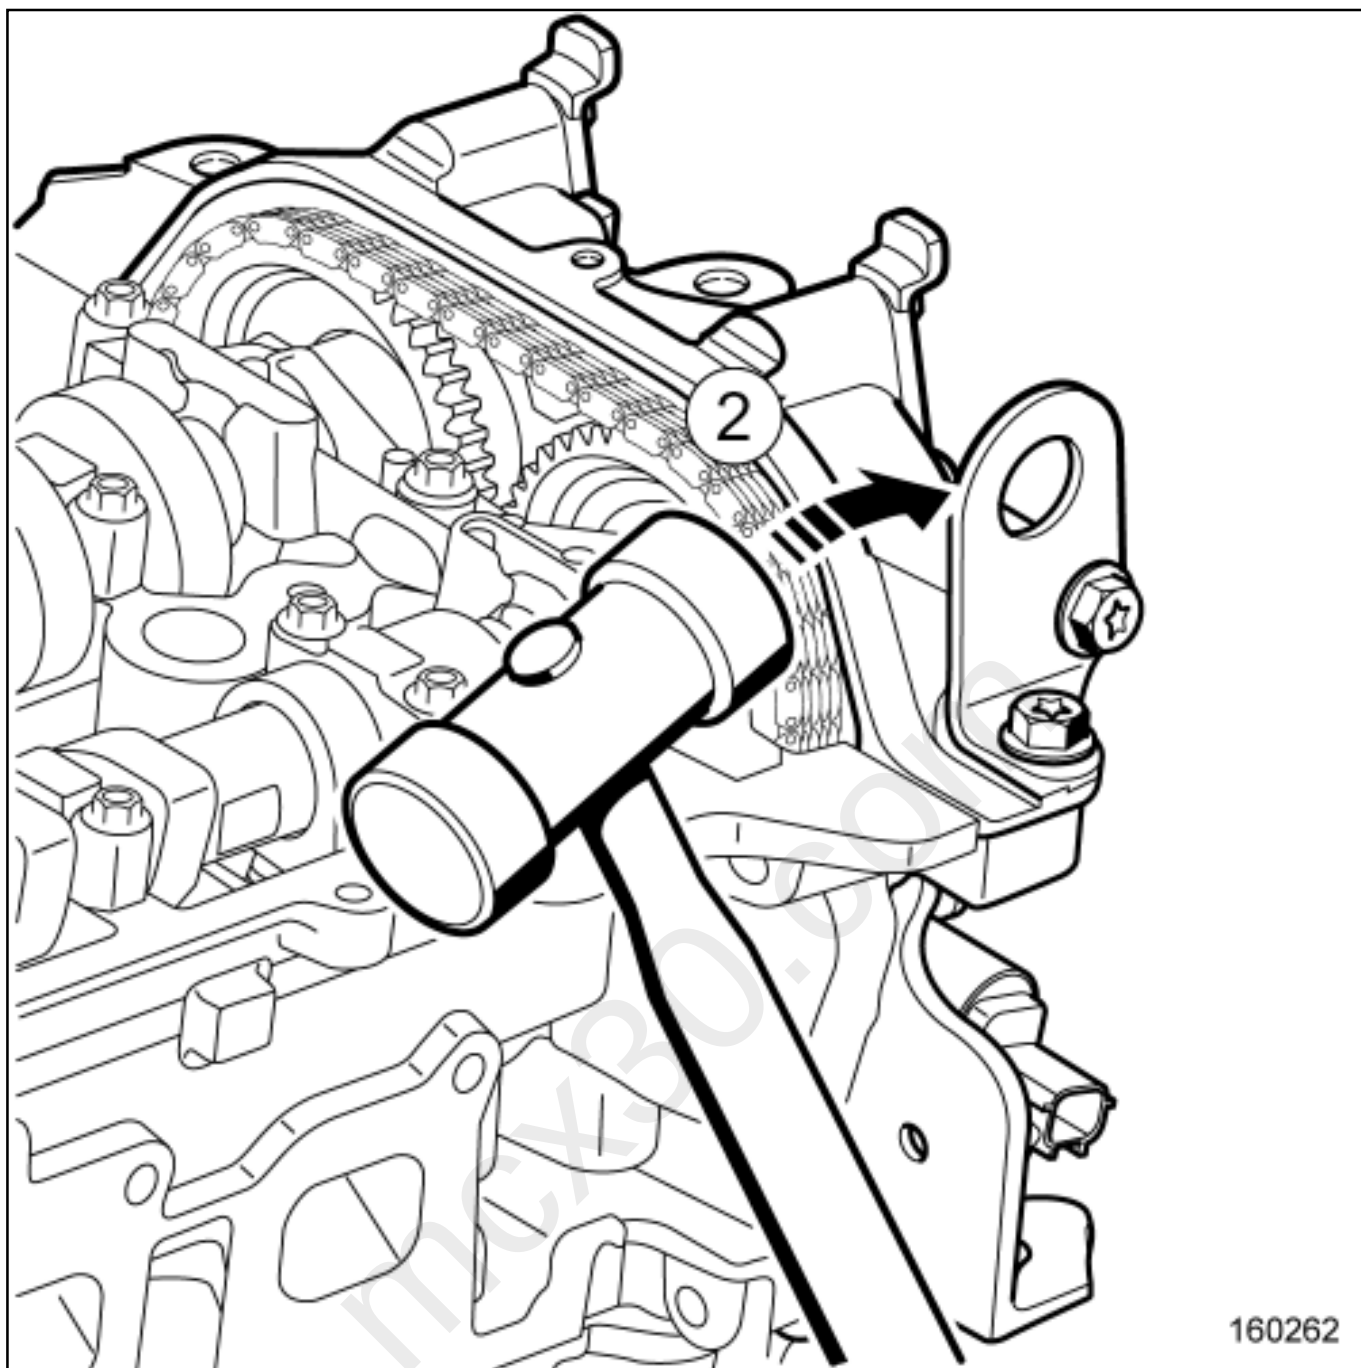


Tap the lifting eye using a mallet(2) to detach the timing cover.

Remove the timing cover([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) .

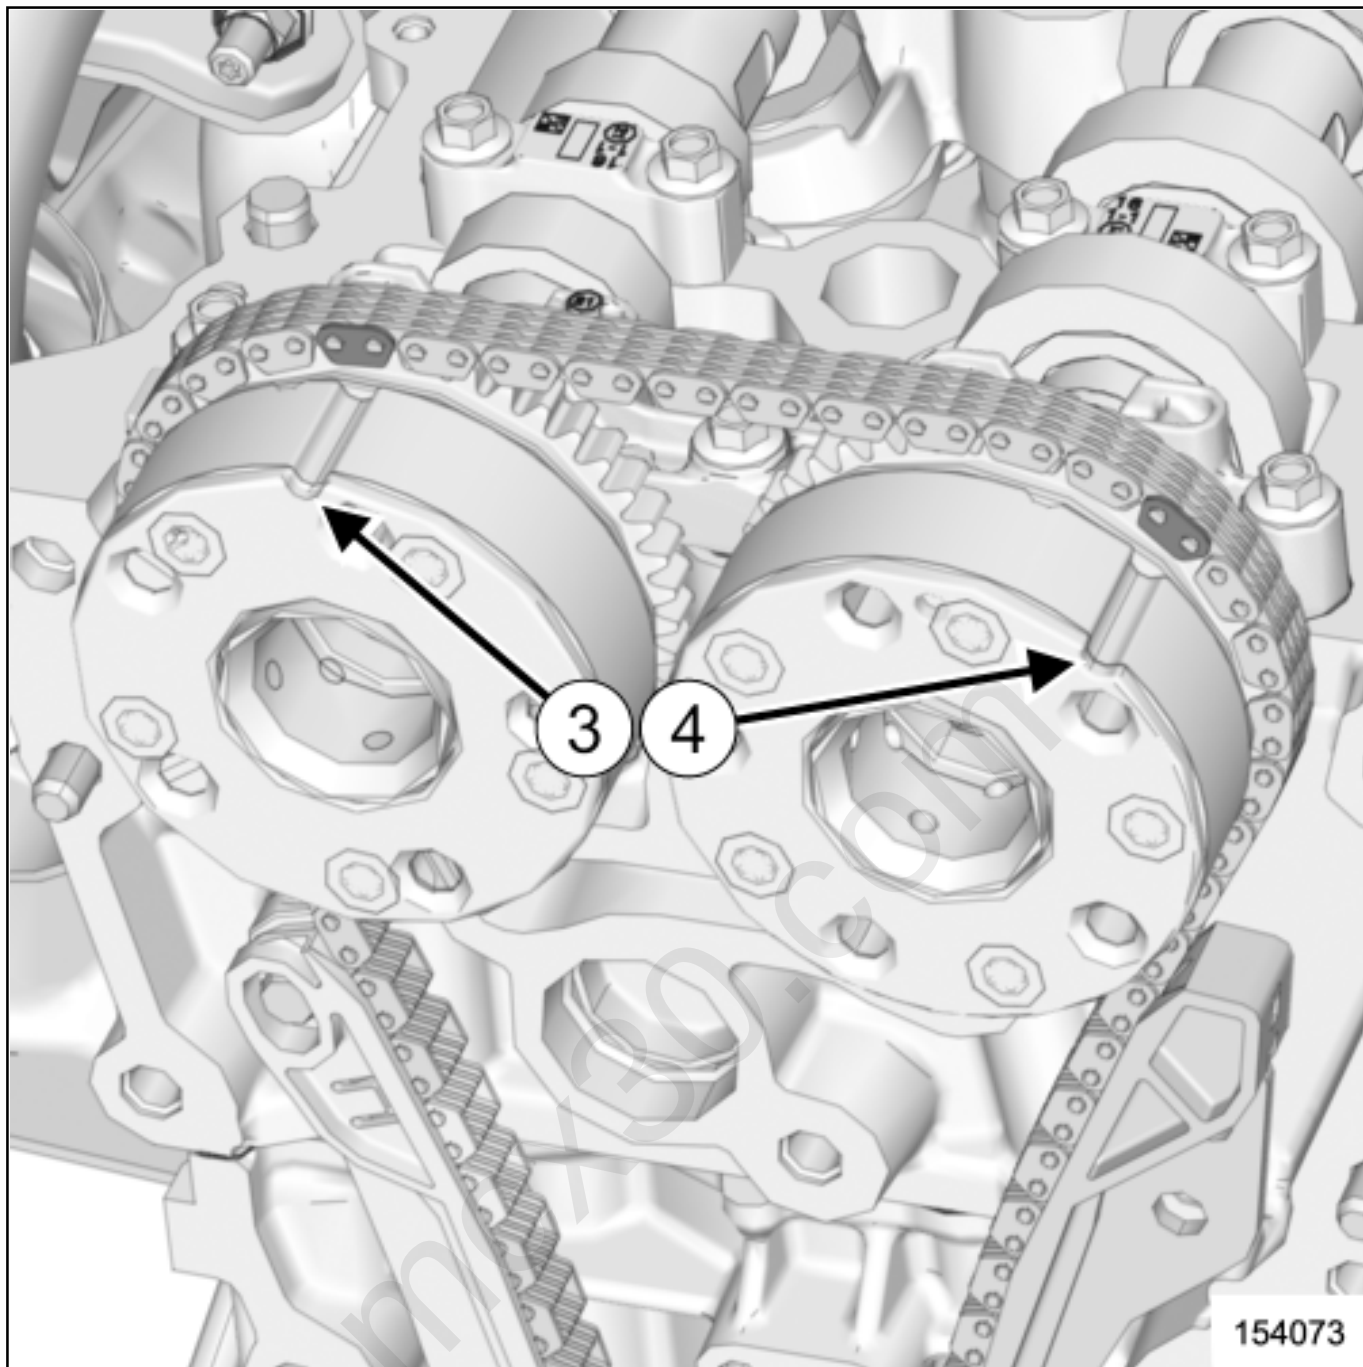


Check that the mark(3) of the exhaust camshaft timing sprocket and the mark(4) of the inlet camshaft timing sprocket are in the same position as shown in the illustration.

2. REMOVAL OPERATION

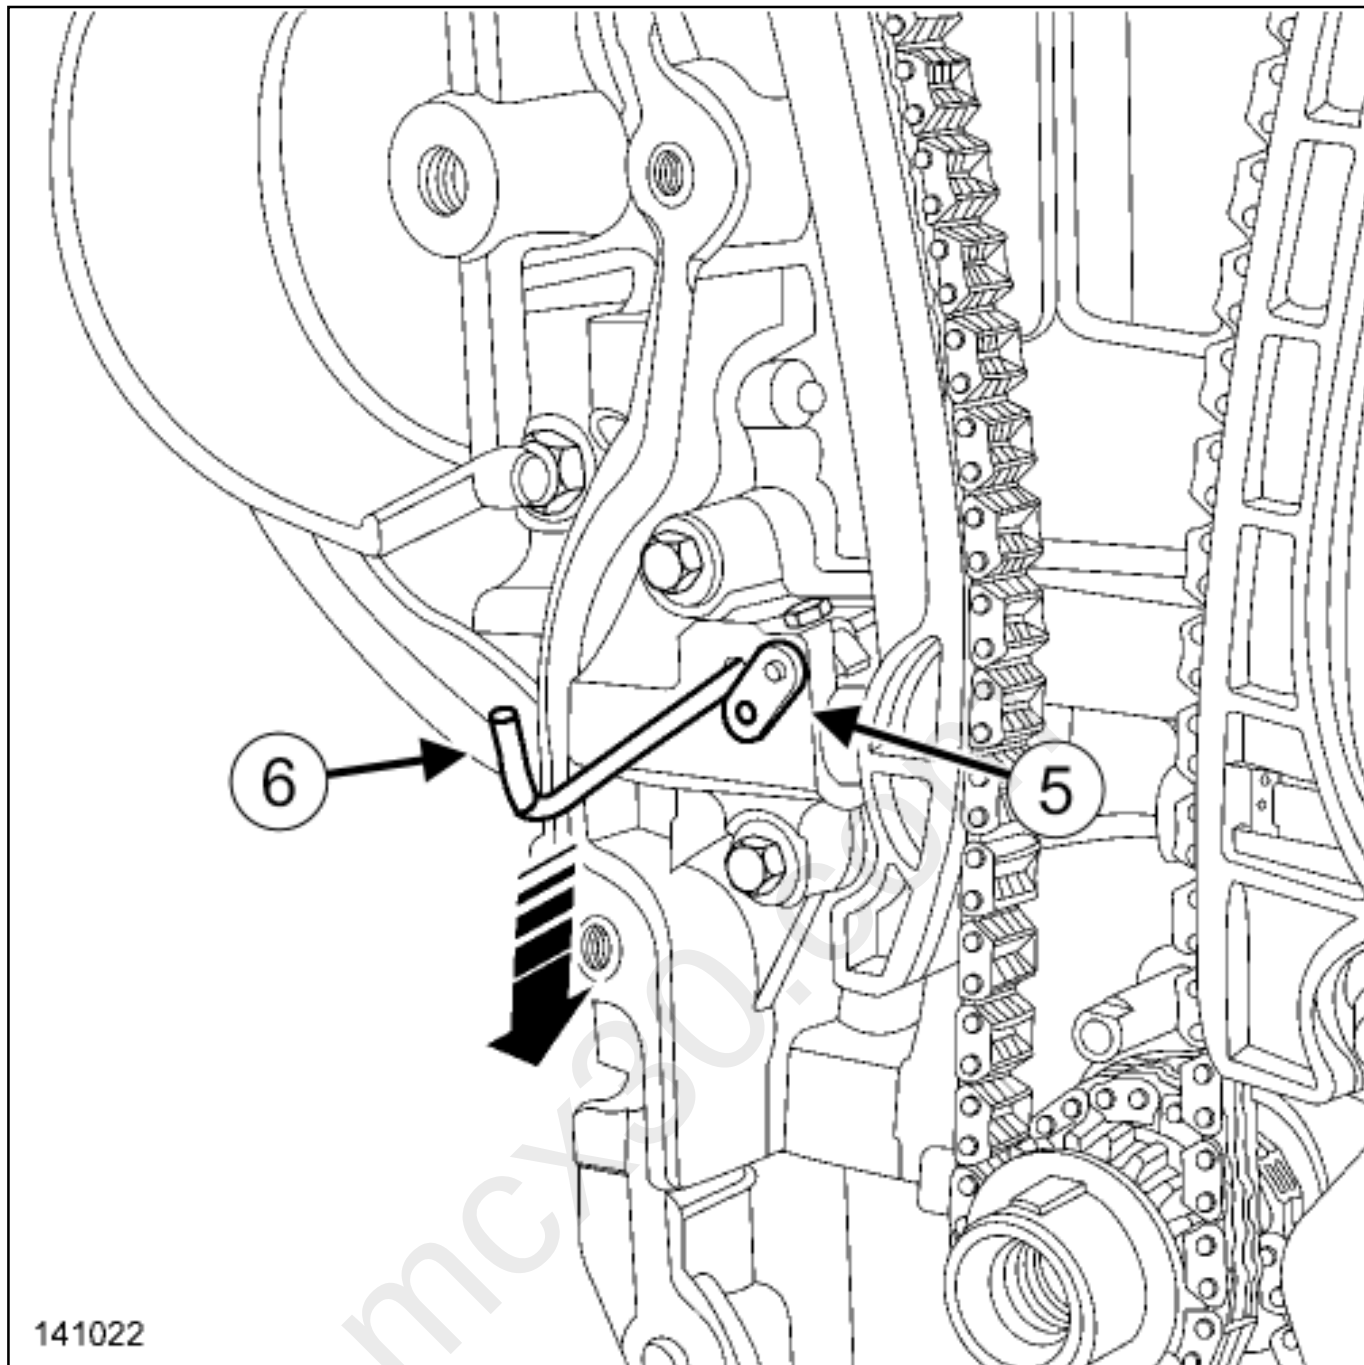


Lower the lever(5) of the timing hydraulic tensioner(see 11A, Top and front of engine, Timing assembly: Exploded view) as far as possible using a 2.5 mm Allen key(6) to release the tensioner piston.

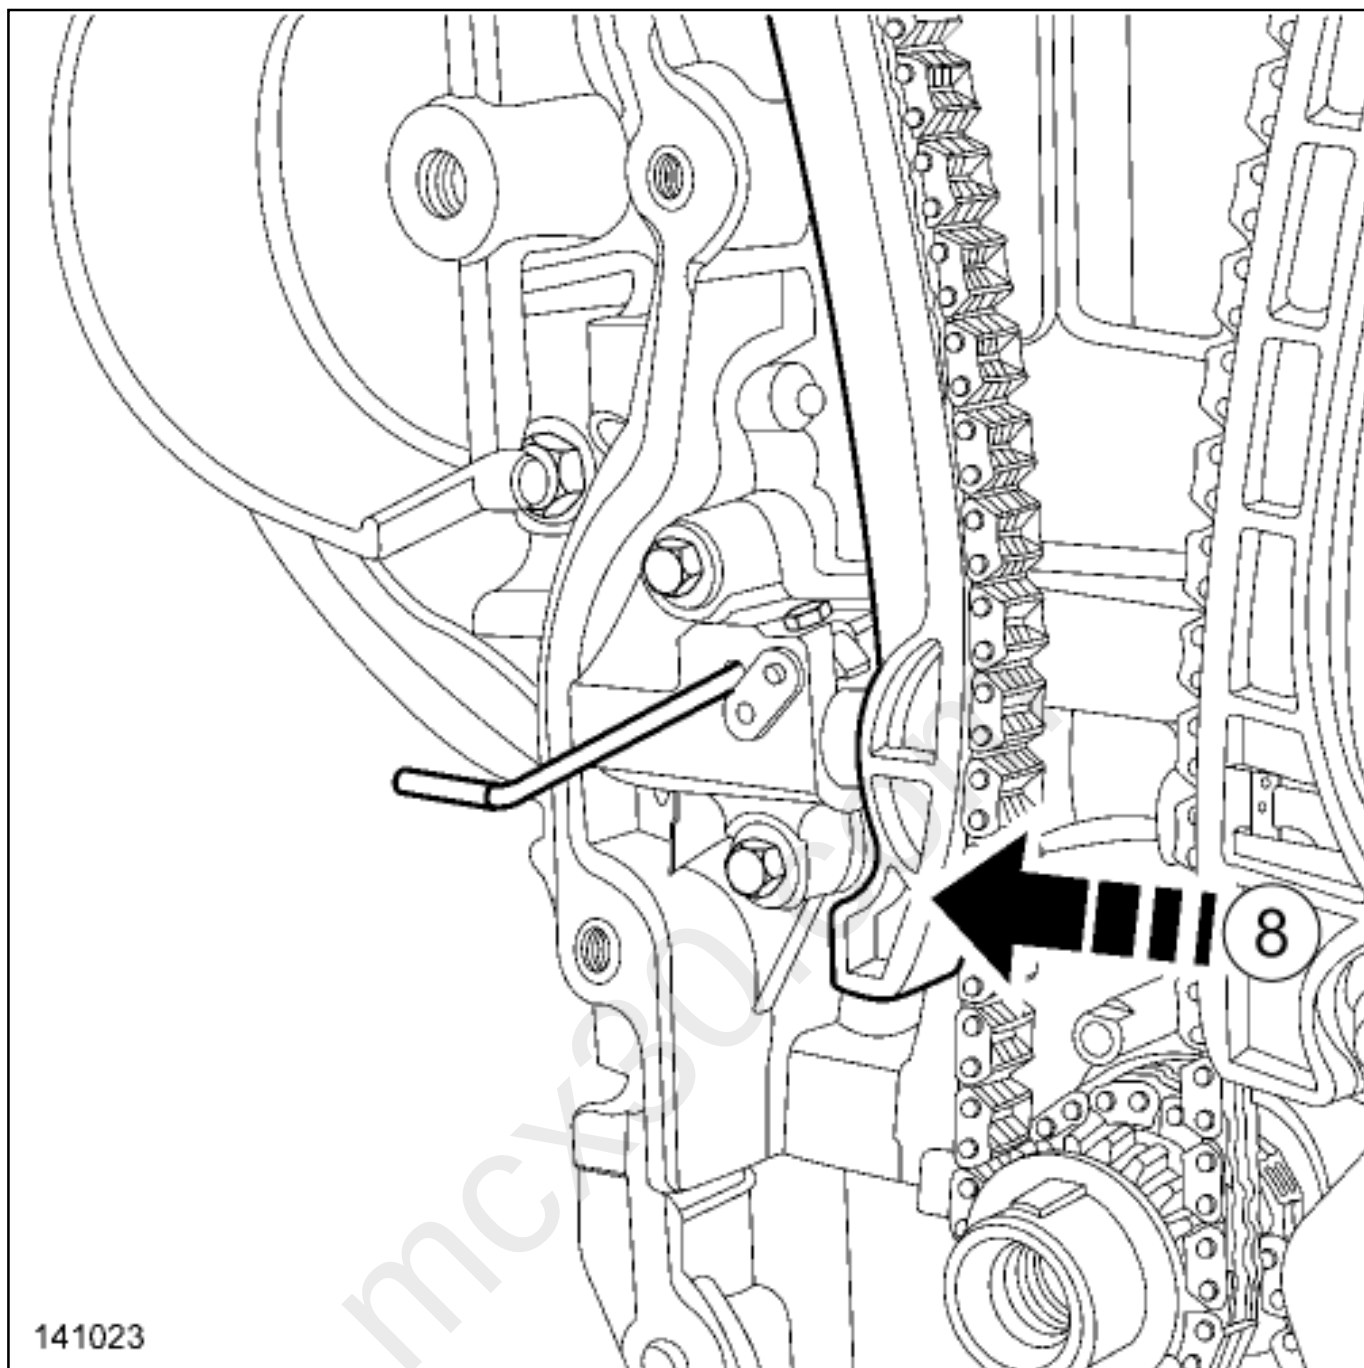


Push on the timing chain tensioning guide(see [11A, Top and front of engine, Timing assembly: Exploded view](#)) until the timing hydraulic tensioner piston is fully depressed(7) .



Remove the 2.5 mm Allen key from the timing hydraulic tensioner.

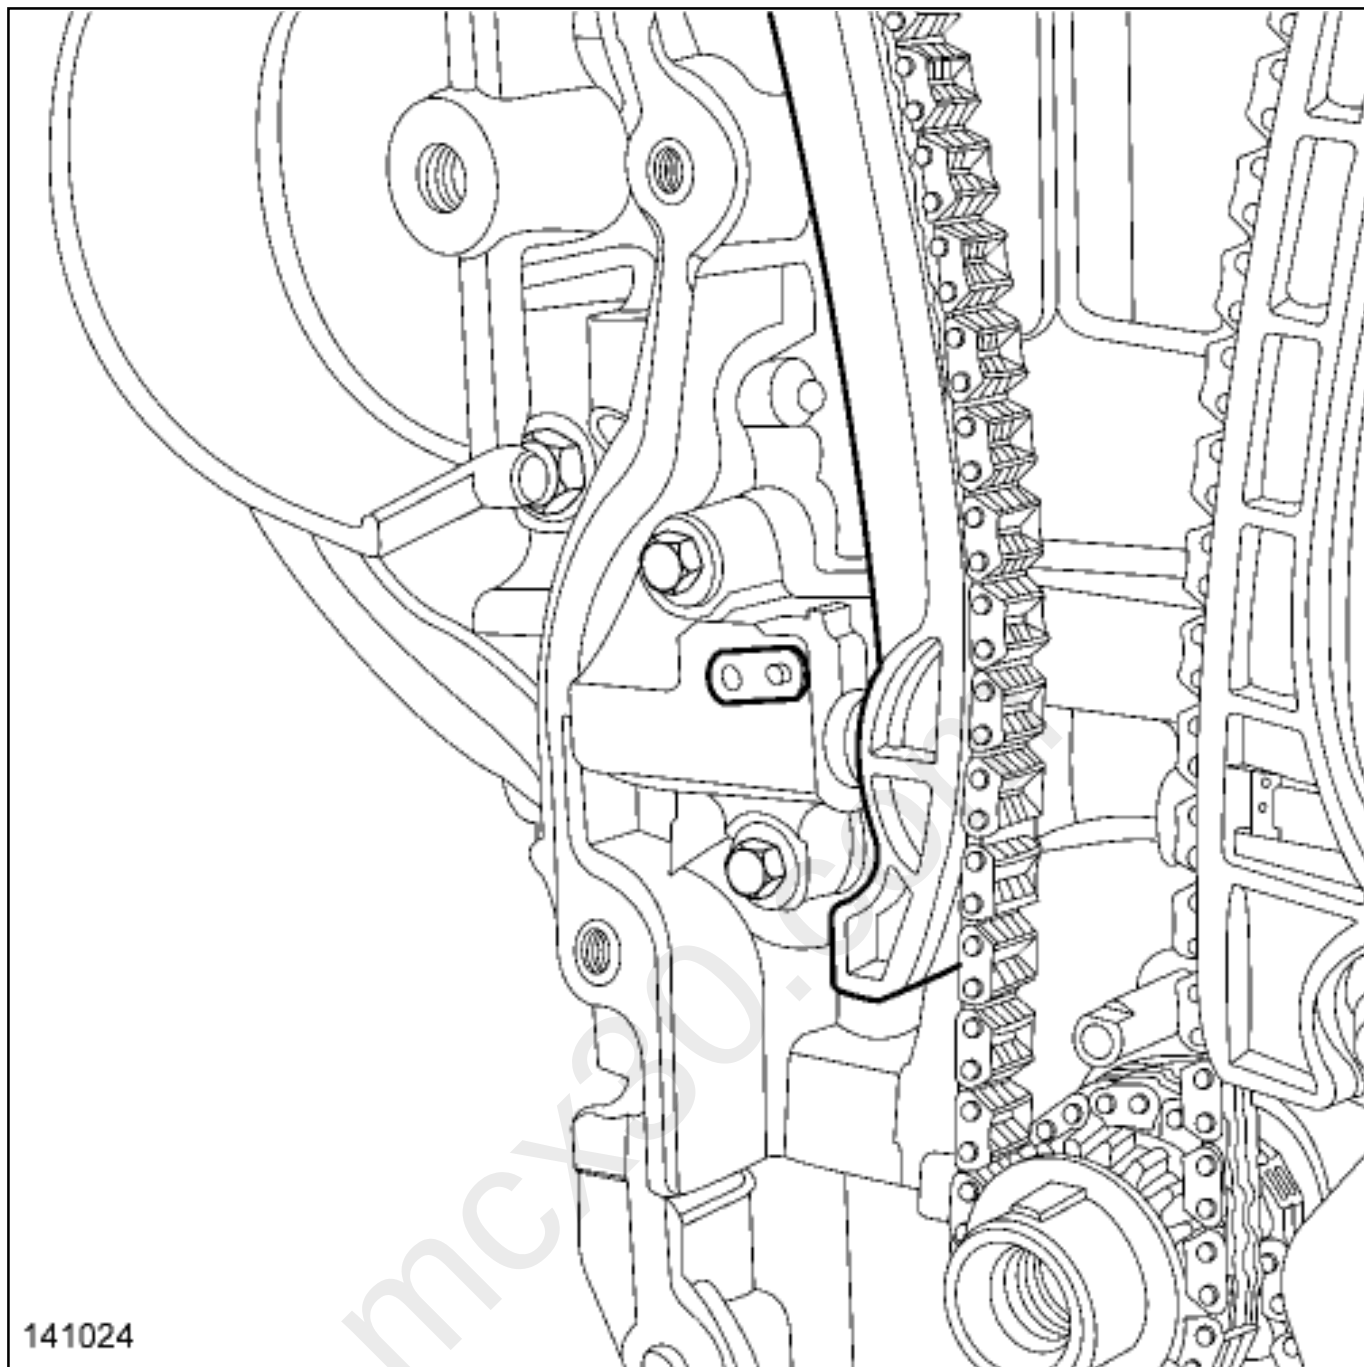

Carefully release the timing chain tensioning guide until the tensioner lever is aligned with the opening on the tensioner casing.

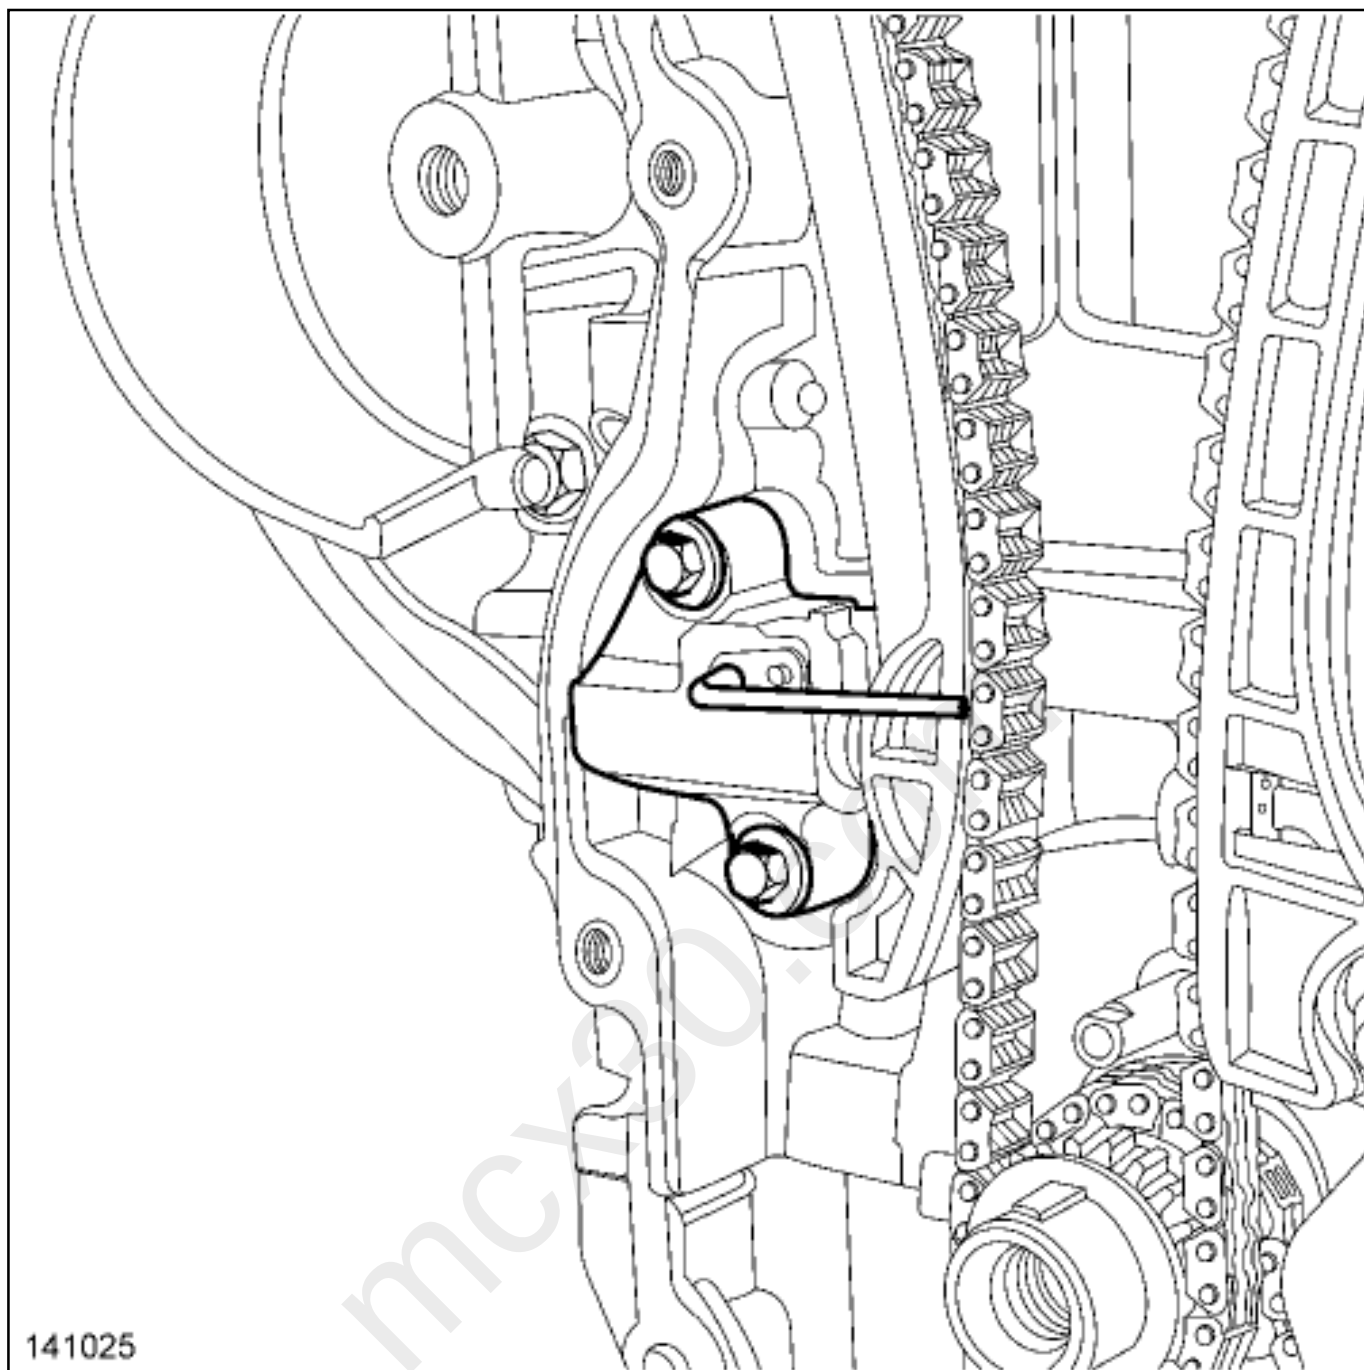

Fit the 2.5 mm Allen key in the hole on the timing hydraulic tensioner casing to lock the timing chain tensioner lever in the locking position.



Remove: [\(see 11A, Top and front of engine, Timing assembly: Exploded view\)](#)



the timing hydraulic tensioner bolts,





the timing chain tensioner, taking care not to unlock it,

- the timing chain tensioning guide from its shaft,

- the timing chain guide bolts,

- the timing chain guide.

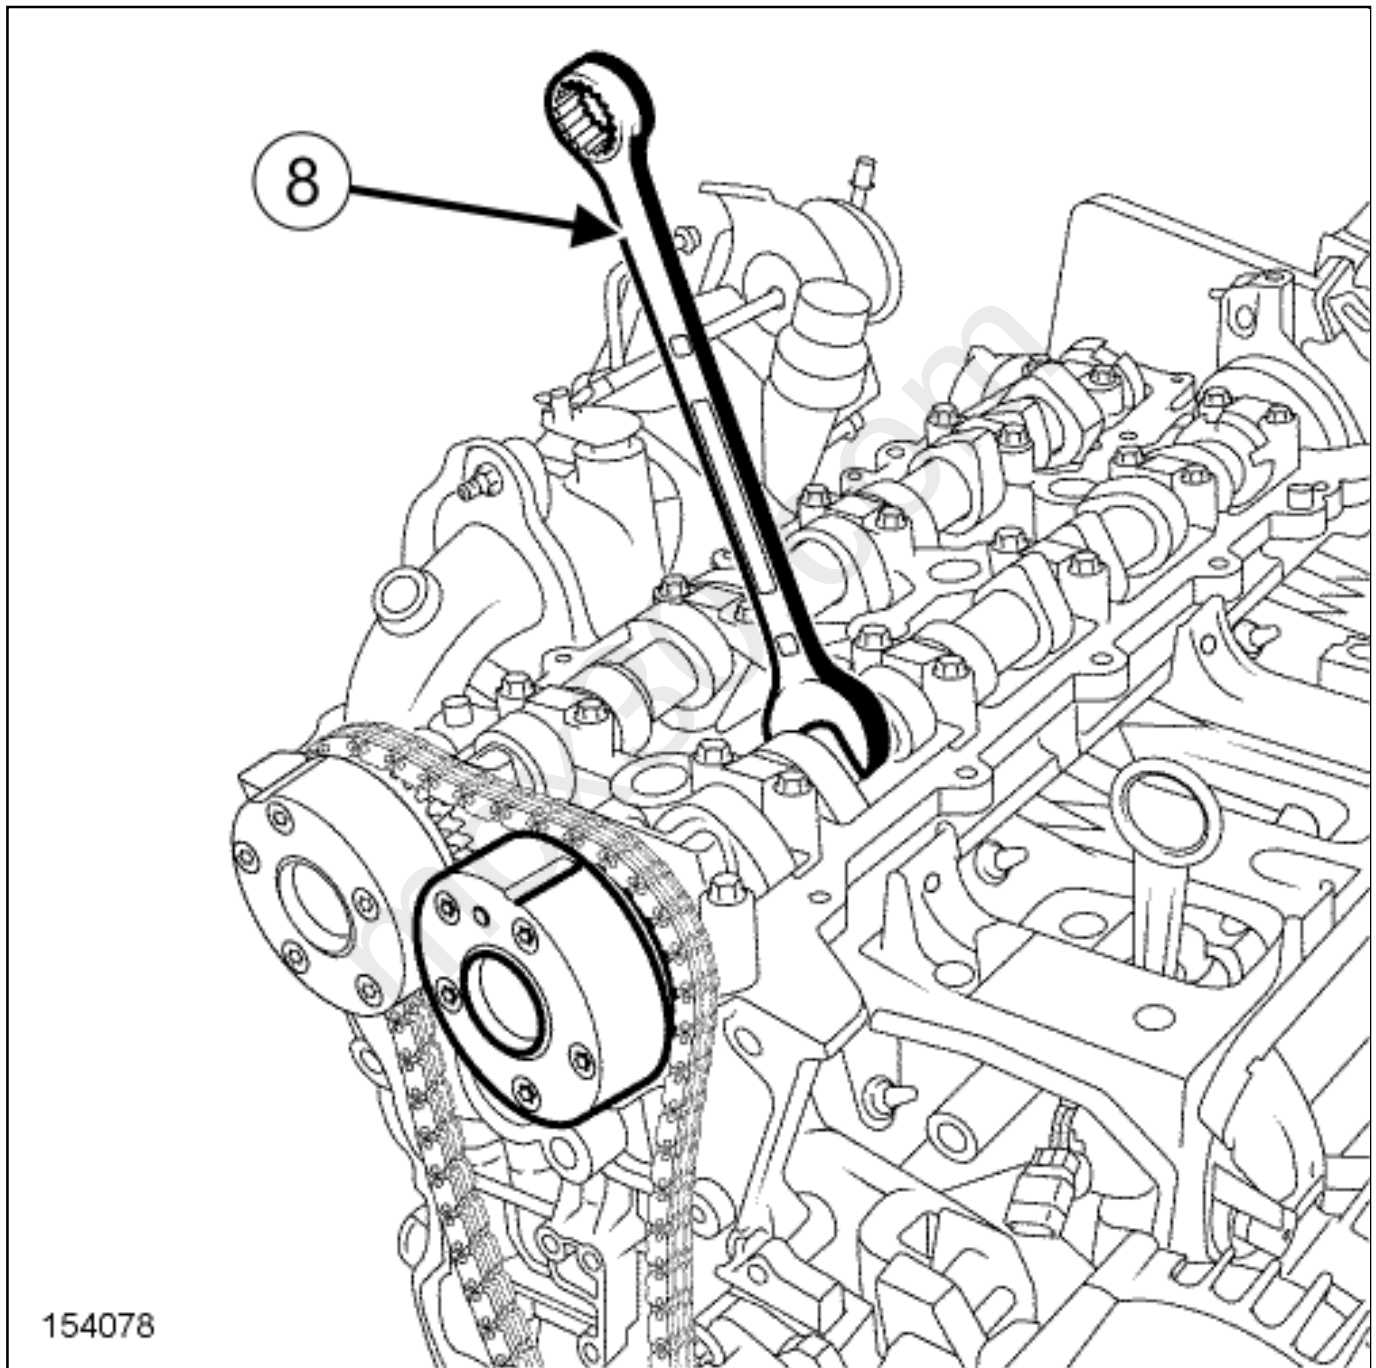

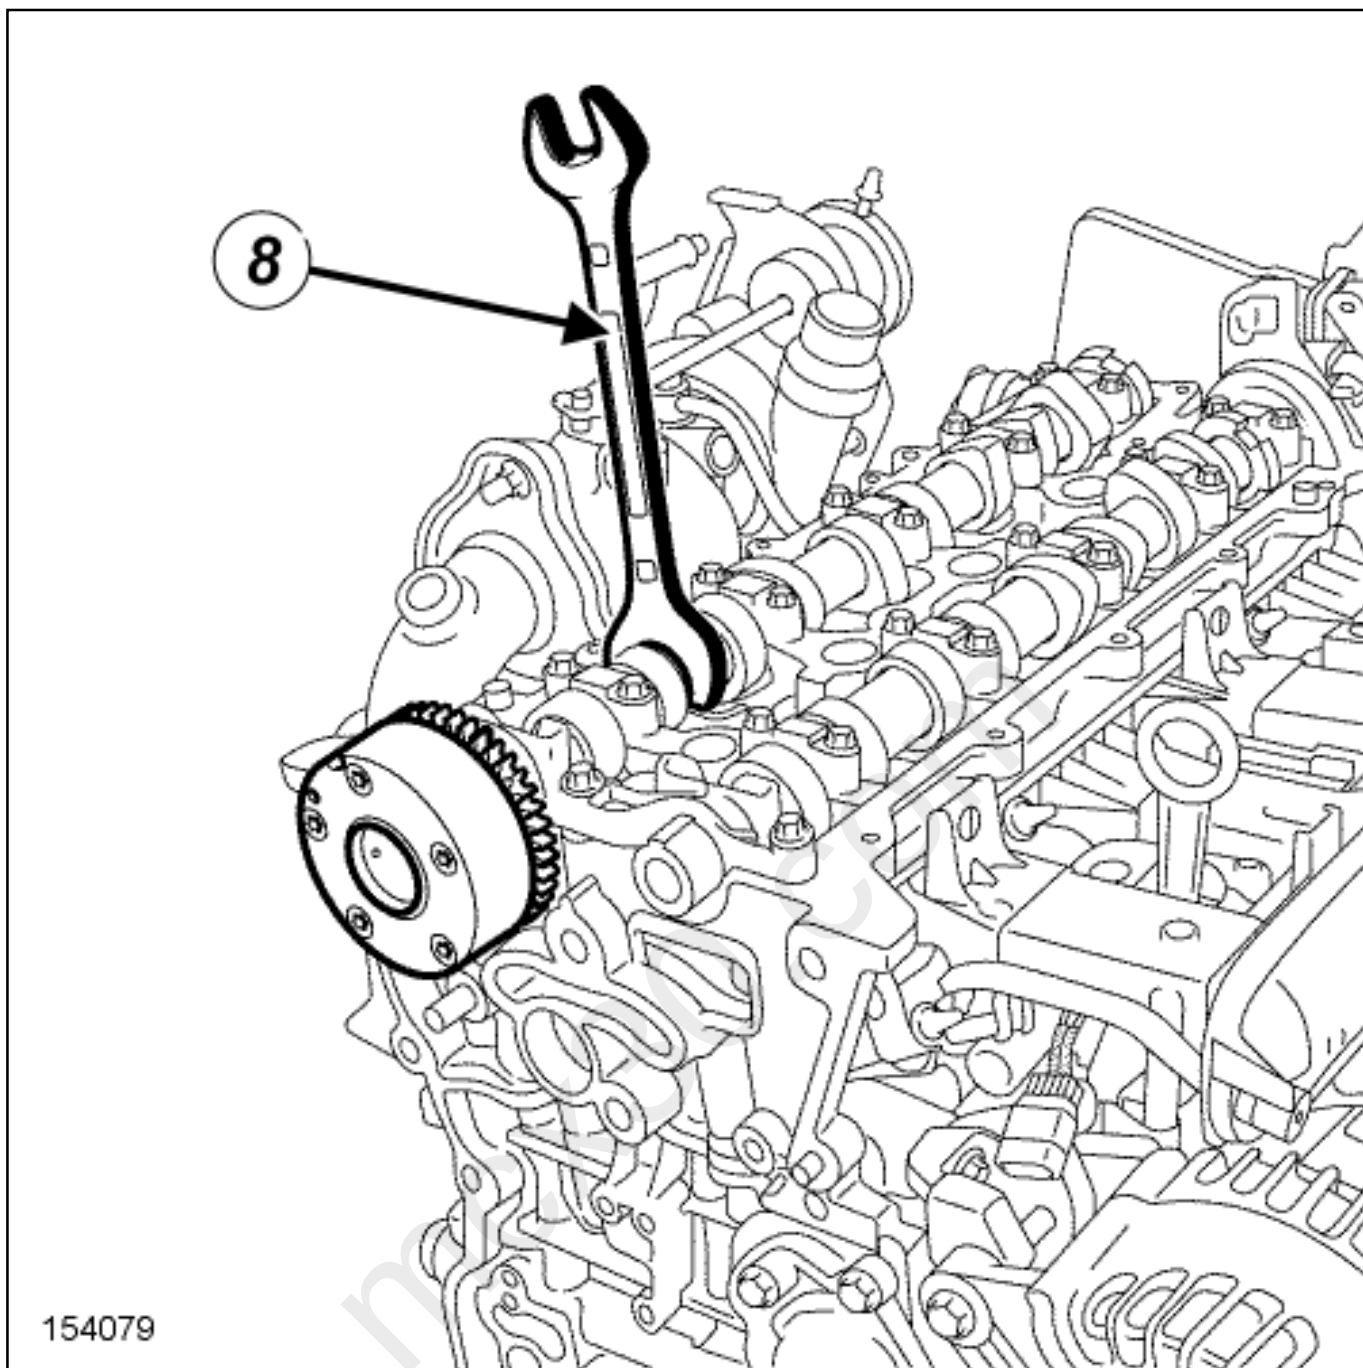

154079

To loosen the timing sprocket bolts, hold the camshafts using an open-jawed spanner(8) .

Remove : [\(see 11A, Top and front of engine, Timing assembly: Exploded view\)](#)

- the timing sprocket bolts,

- the exhaust camshaft timing sprocket,

- the inlet camshaft timing sprocket,

- the timing chain.

REFITTING

1. REFITTING PREPARATION OPERATION

Remove the silicone adhesive sealant residues from the joint faces using a plastic spatula.



CAUTION

Do not scrape the aluminium joint faces, any damage caused to the joint face will result in a risk of leaks.



Note:

The groove pattern ensures proper bonding of the silicone adhesive sealant on the joint faces and must not be altered.

Clean using SUPER CLEANING AGENT FOR JOINT FACES [Vehicle: Parts and consumables for the repair](#) the joint faces of:

- the cylinder head,

- the cylinder block,

- the timing cover.

Finish cleaning the joint faces using a GREY ABRASIVE PAD [Vehicle: Parts and consumables for the repair](#) .



CAUTION

Do not use any kind of sandpaper.

Degrease using SURFACE CLEANER [Vehicle: Parts and consumables for the repair](#) the joint faces of:

-
- the cylinder head,
- the cylinder block,
- the timing cover.



CAUTION


To ensure proper sealing, the gasket surfaces must be clean, dry and not greasy (avoid any finger marks).



parts always to be replaced: [Timing chain](#) .

Always replace:

-
- the timing chain hydraulic tensioner,
- the timing chain tensioning guide,
- the timing chain guide.

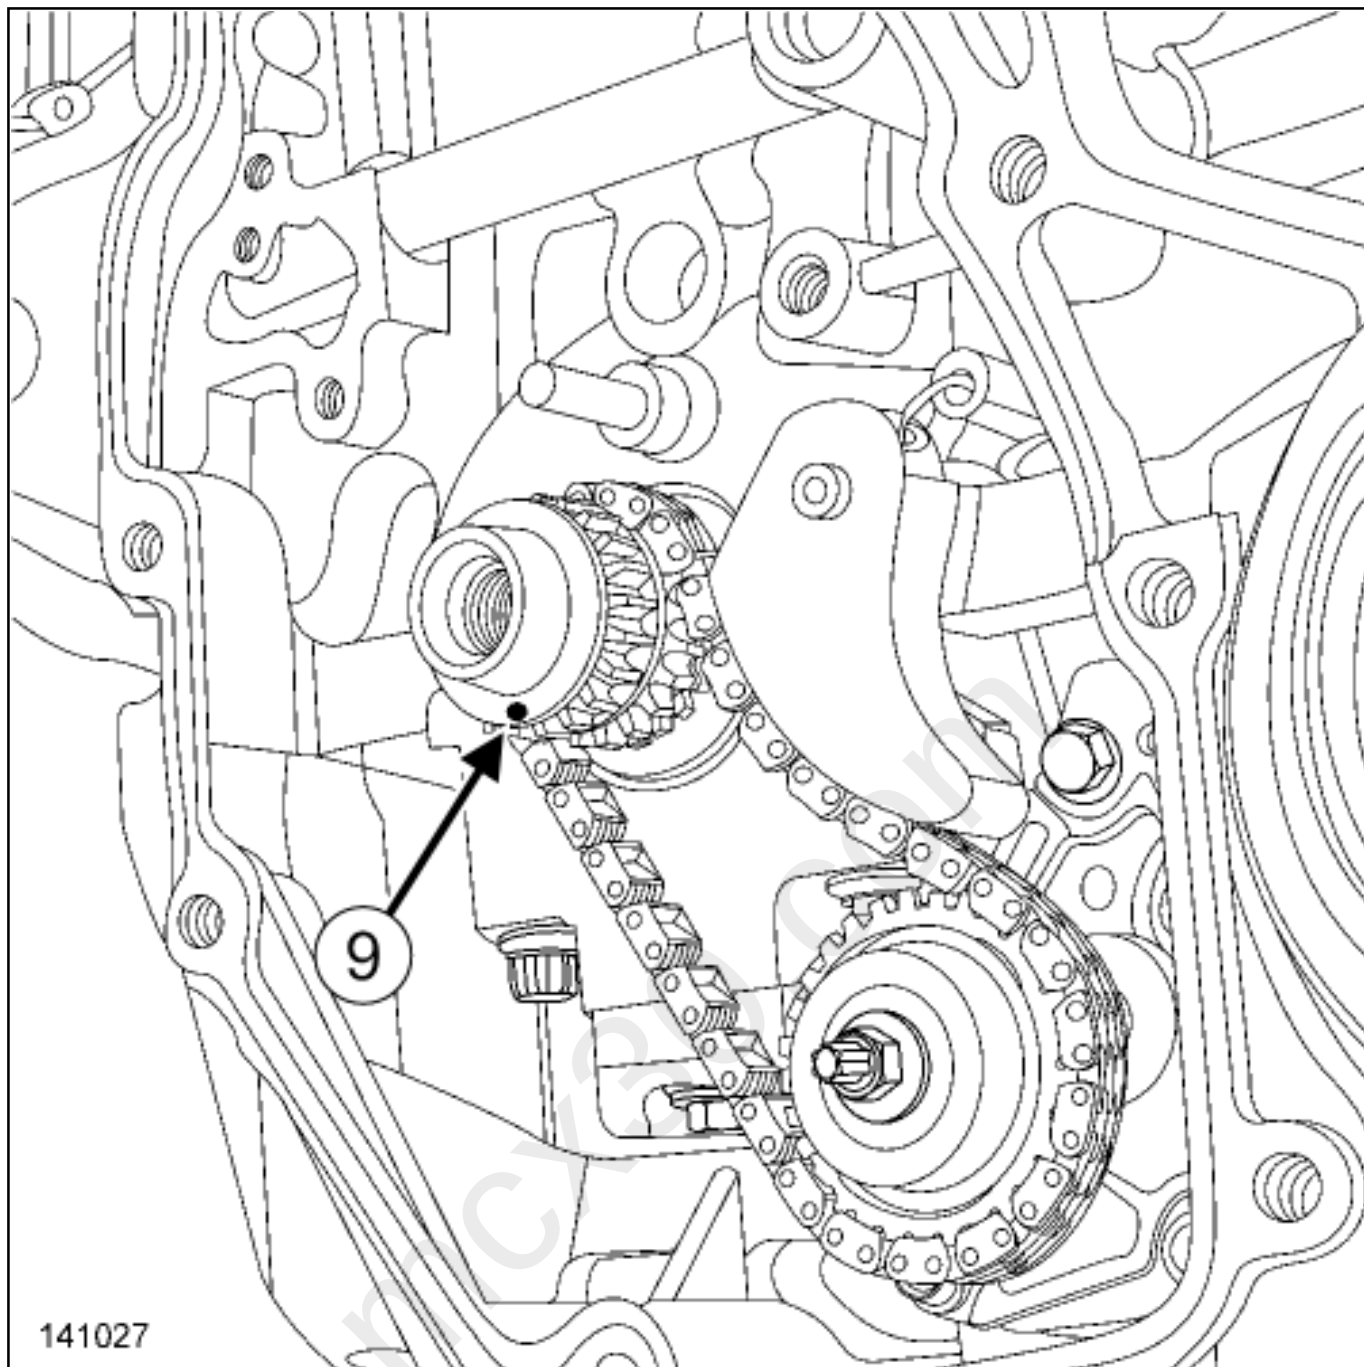

Check that the crankshaft mark(9) is positioned vertically pointing downwards.


2. REFITTING OPERATION

Refit [\(see 11A, Top and front of engine, Timing assembly: Exploded view\)](#) :

- the inlet camshaft timing sprocket,

the exhaust camshaft timing sprocket,

the timing sprocket bolts.

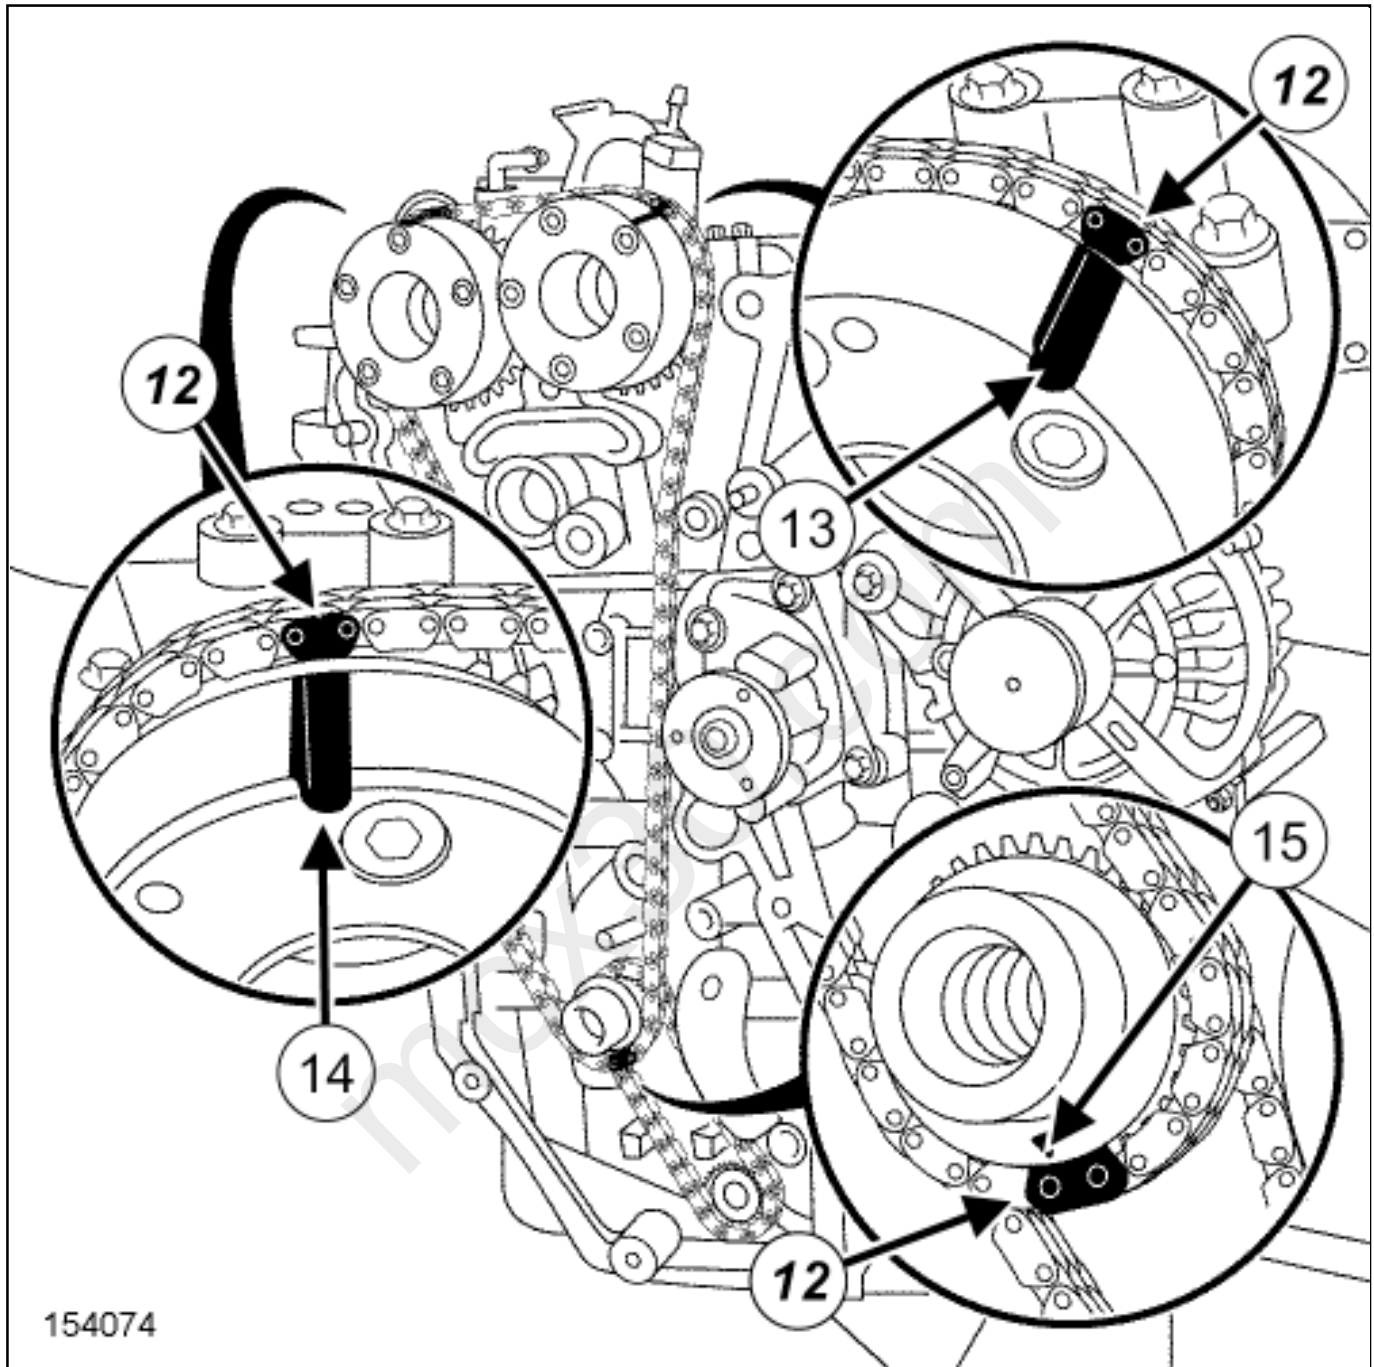

Refit:

a new timing chain, starting with the camshaft dephaser and by aligning the painted links(12) of the timing chain with the marks(13) on the inlet camshaft dephaser,(14) on the exhaust camshaft sprocket and(15) on the crankshaft sprocket,

the new timing chain guide([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) ,

the timing chain guide bolts([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) ,


the new timing chain tensioning guide([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) ,

the new timing hydraulic tensioner([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) ,

the timing hydraulic tensioner([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) .


Unlock the timing hydraulic tensioner([see 11A, Top and front of engine, Timing assembly: Exploded view](#))

Rotate the crankshaft clockwise through two revolutions (timing end).

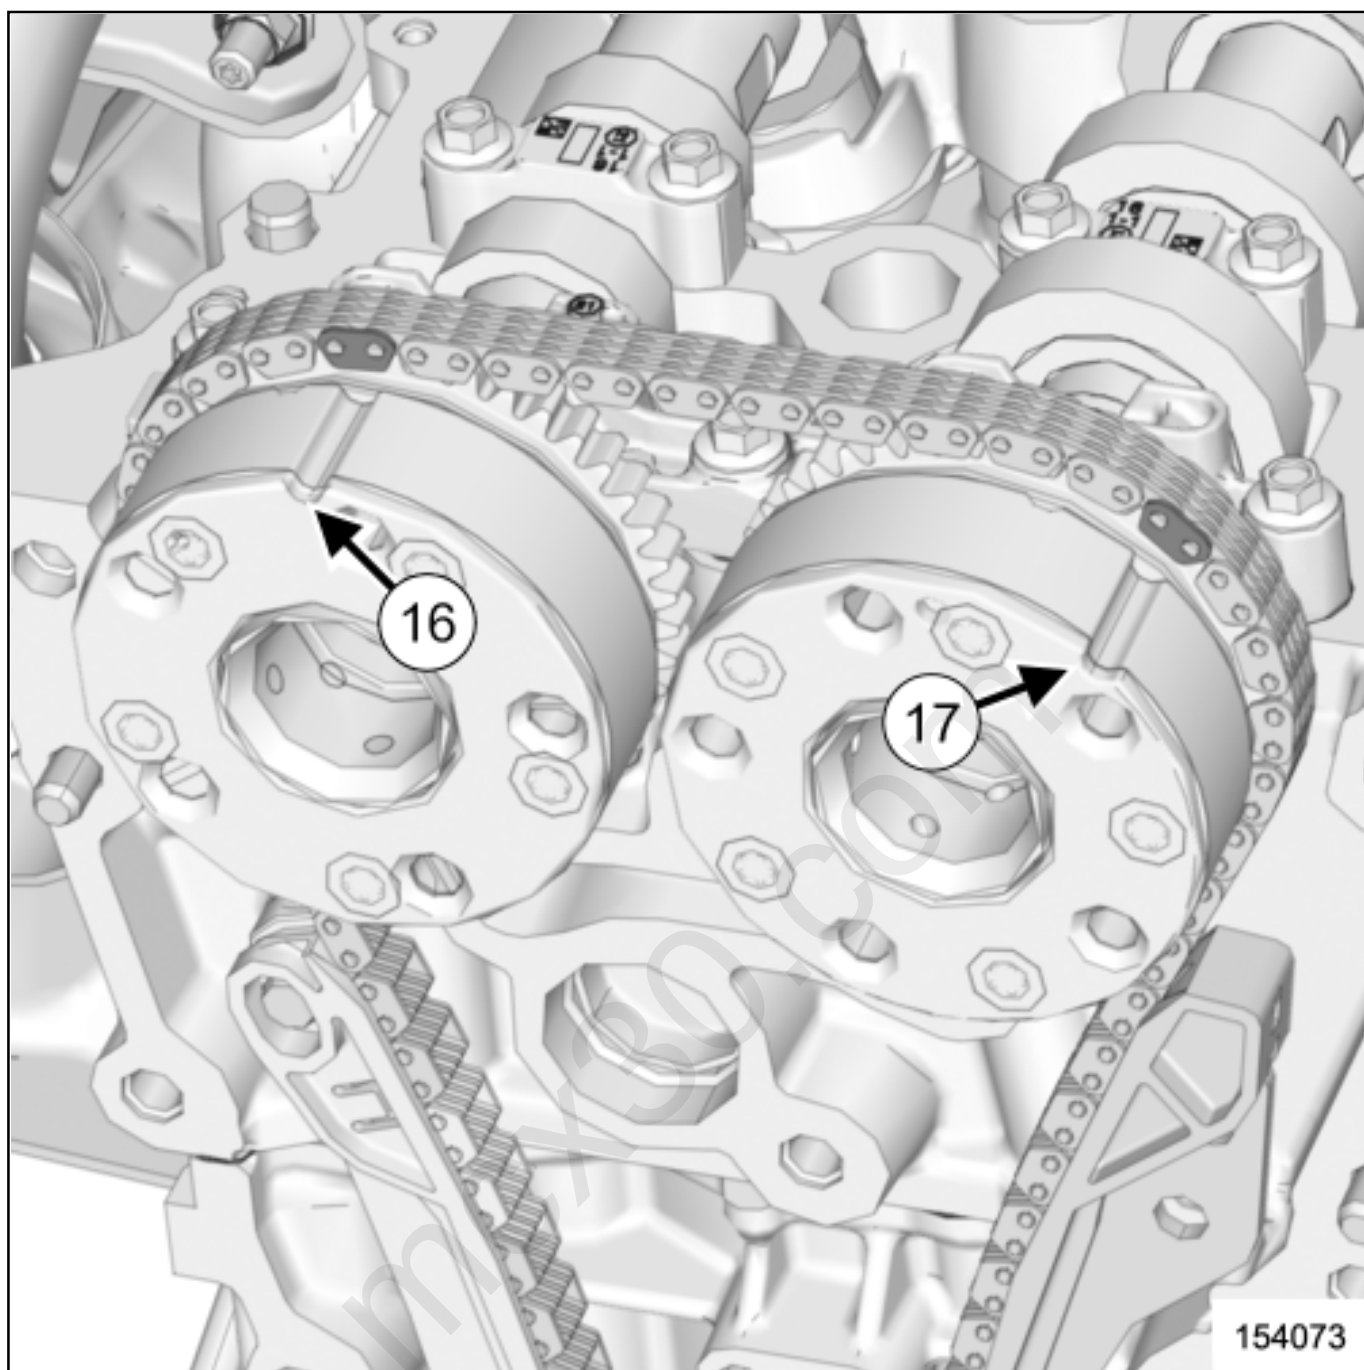

Check that the mark(16) of the exhaust camshaft timing sprocket and the mark(17) of the inlet camshaft timing sprocket are in the same position as shown in the illustration.

3. FINAL OPERATION

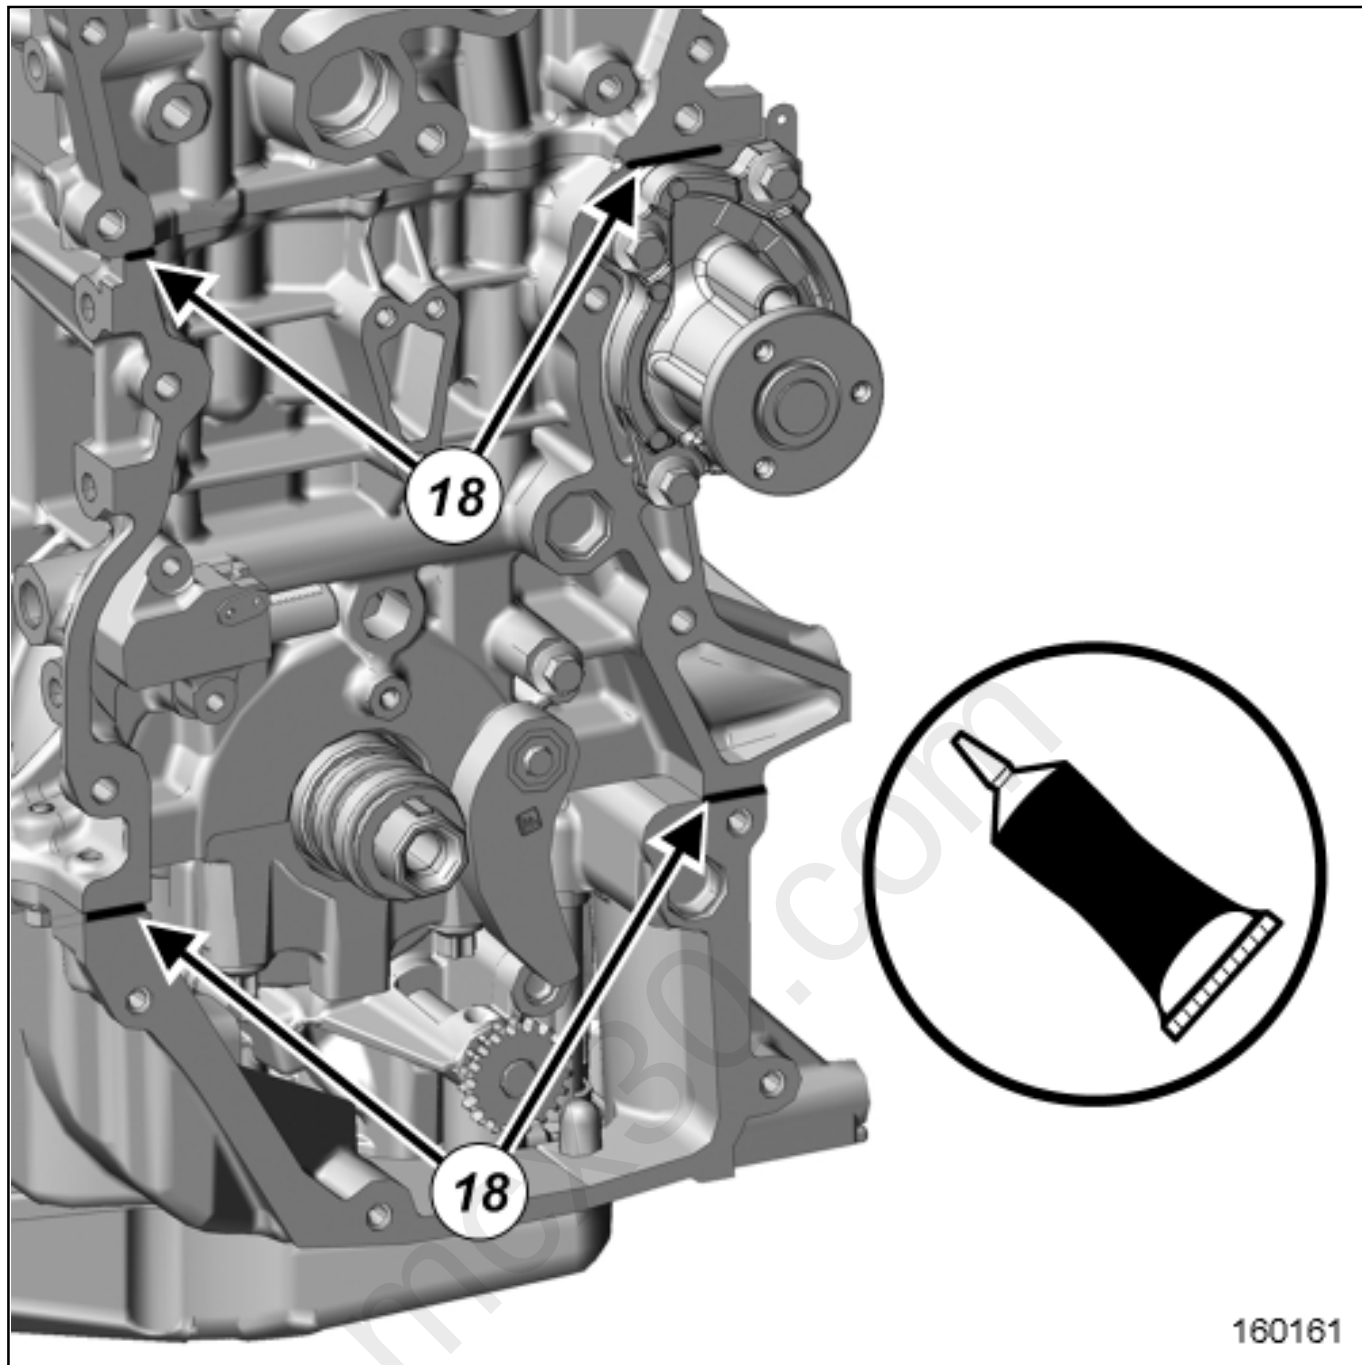

Degrease using SURFACE CLEANER [Vehicle: Parts and consumables for the repair](#) the joint faces of:

- the cylinder head,

- the cylinder block.


Apply 4 beads of SILICONE ADHESIVE SEALANT [Vehicle: Parts and consumables for the repair](#) at (18) with a diameter of 3 to 4 mm to fill the gaps between timing cover/cylinder head and timing cover/oil sump.



CAUTION

Applying excess sealant could cause it to be squeezed out when parts are tightened. A mixture of sealant and fluid could damage certain components (engine, radiator, etc.).


Remove any excess of silicone adhesive sealant using a plastic spatula.

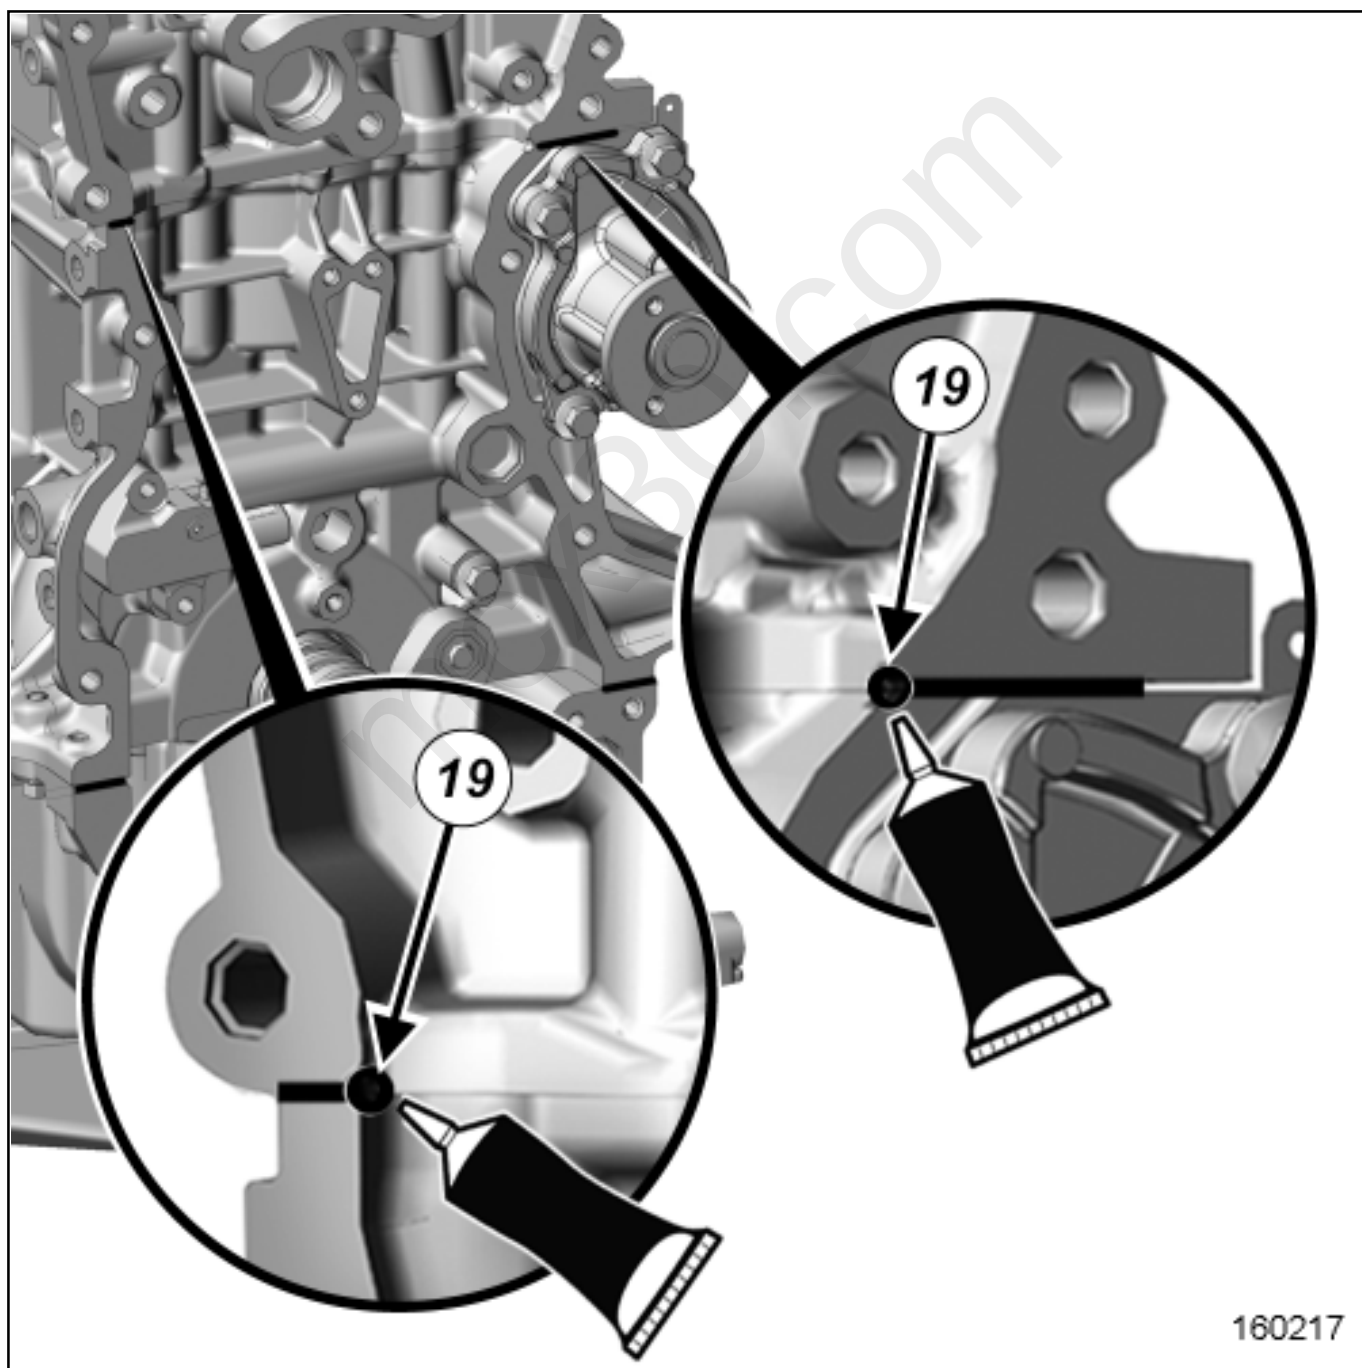

160217

Apply a drop of SILICONE ADHESIVE SEALANT [Vehicle: Parts and consumables for the repair](#) with a minimum thickness of 5 mm in the slots(19) to ensure complete sealing of the timing cover / cylinder block / cylinder head.

Degrease the joint faces of the timing cover using SURFACE CLEANER [Vehicle: Parts and consumables for the repair](#)

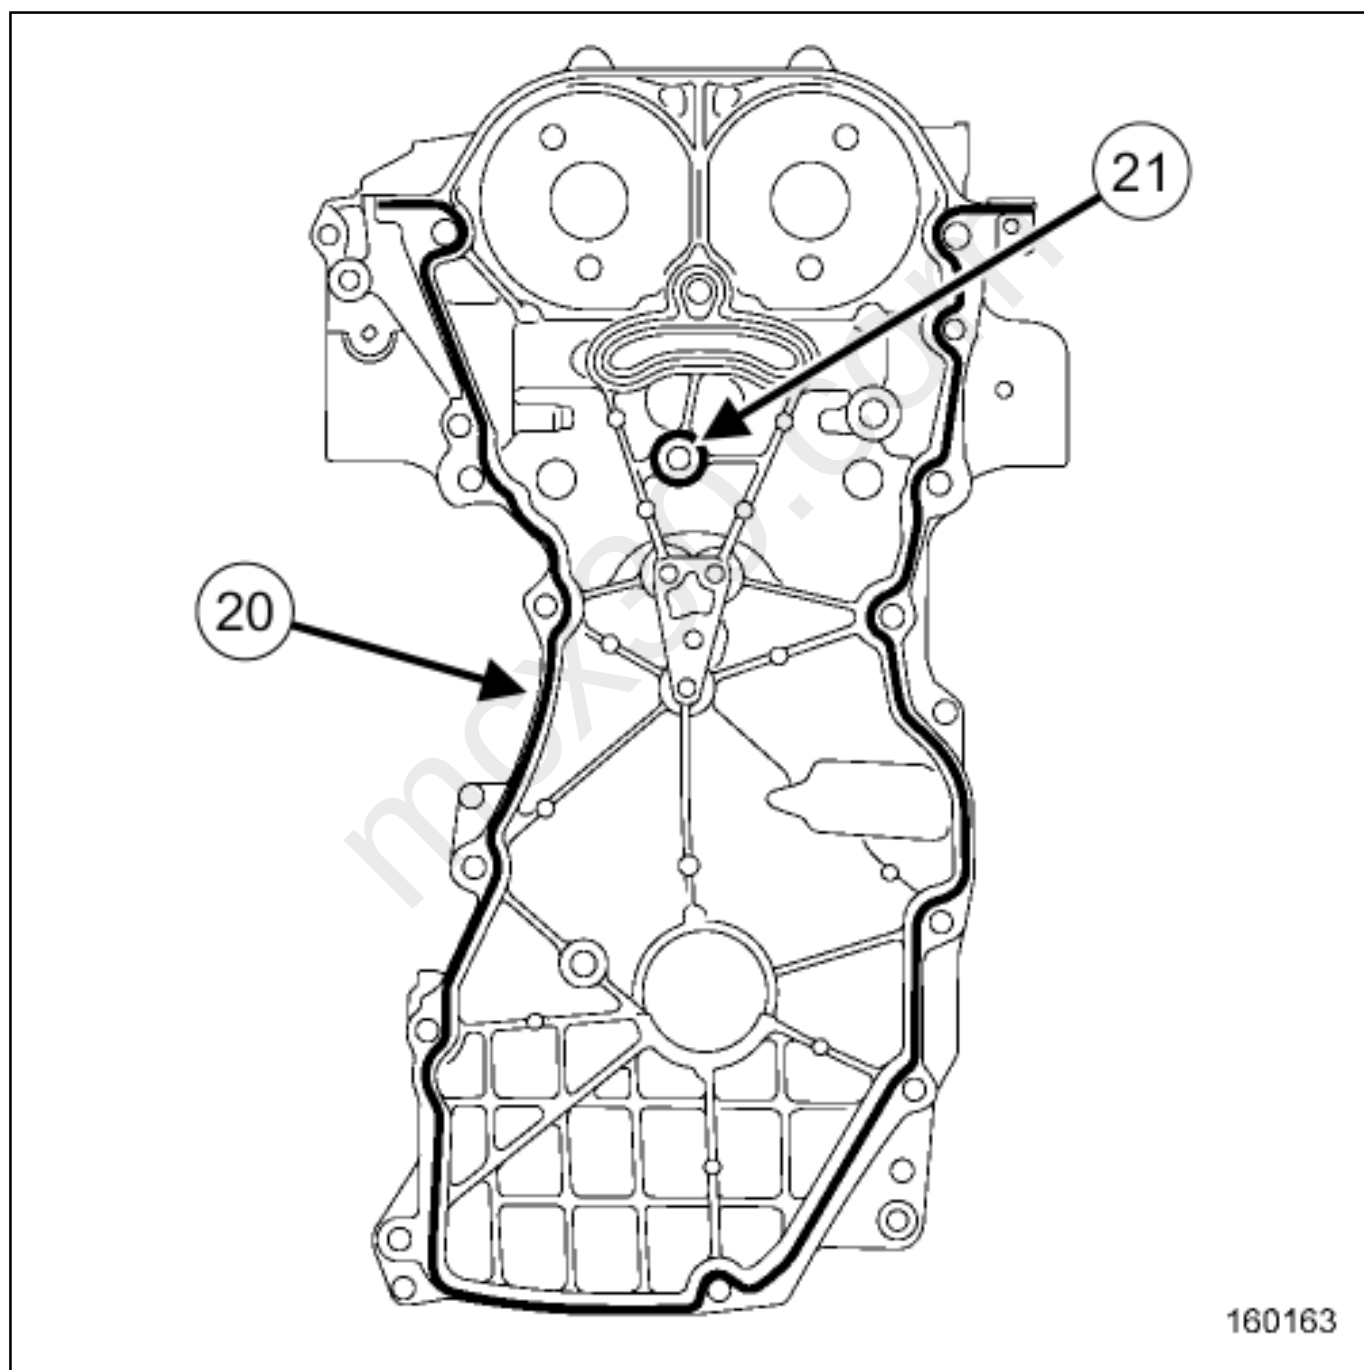

Apply a bead of SILICONE ADHESIVE SEALANT [Vehicle: Parts and consumables for the repair](#) with a diameter of 3 to 4 mm:

■
on the joint face of the timing cover(20) placed at a distance of 1 to 2 mm from the inside edge of the timing cover,
■

on the center part(21) of the timing cover.

CAUTION



Applying excess sealant could cause it to be squeezed in when parts are tightened. A mixture of sealant and fluid could damage certain components (engine, radiator, etc.).

■
Refit within 5 to 10 min([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) :

■
the timing cover,

the timing cover bolts.

■
Torque tighten the timing cover bolts([see 11A, Top and front of engine, Timing assembly: Exploded view](#)) .

■
Wipe off any excess of silicone adhesive sealant from the timing cover edges using a lint-free cloth [Vehicle: Parts and consumables for the repair](#)

4. FINAL OPERATION

■
Proceed in the reverse order to removal.

