

DOOR MIRROR: REMOVAL - REFITTING



Note, one or more warnings are present in this procedure



Special tooling required

Set of trim removal levers.

Car. 1363

REMOVAL

1. REMOVAL PREPARATION OPERATION

WARNING


DANGER: Risk of serious injury due to short-circuiting or untimely triggering of an electrical system (pyrotechnic components, windscreen wiper motor, fan assembly etc.) following possible re-supply of the 12-volt supply circuit by the voltage converter.




Please follow the instructions regarding lockout of the 12 V supply circuit.

If the procedure fails, do not continue with your task and ask an employee who is qualified and authorised to work on a high-voltage onboard network to perform fault finding [Vehicle: Precautions for the repair](#) .

❑ Disconnect the 12V supply circuit [12 V supply circuit : Lockout - Removal of lockout](#) .

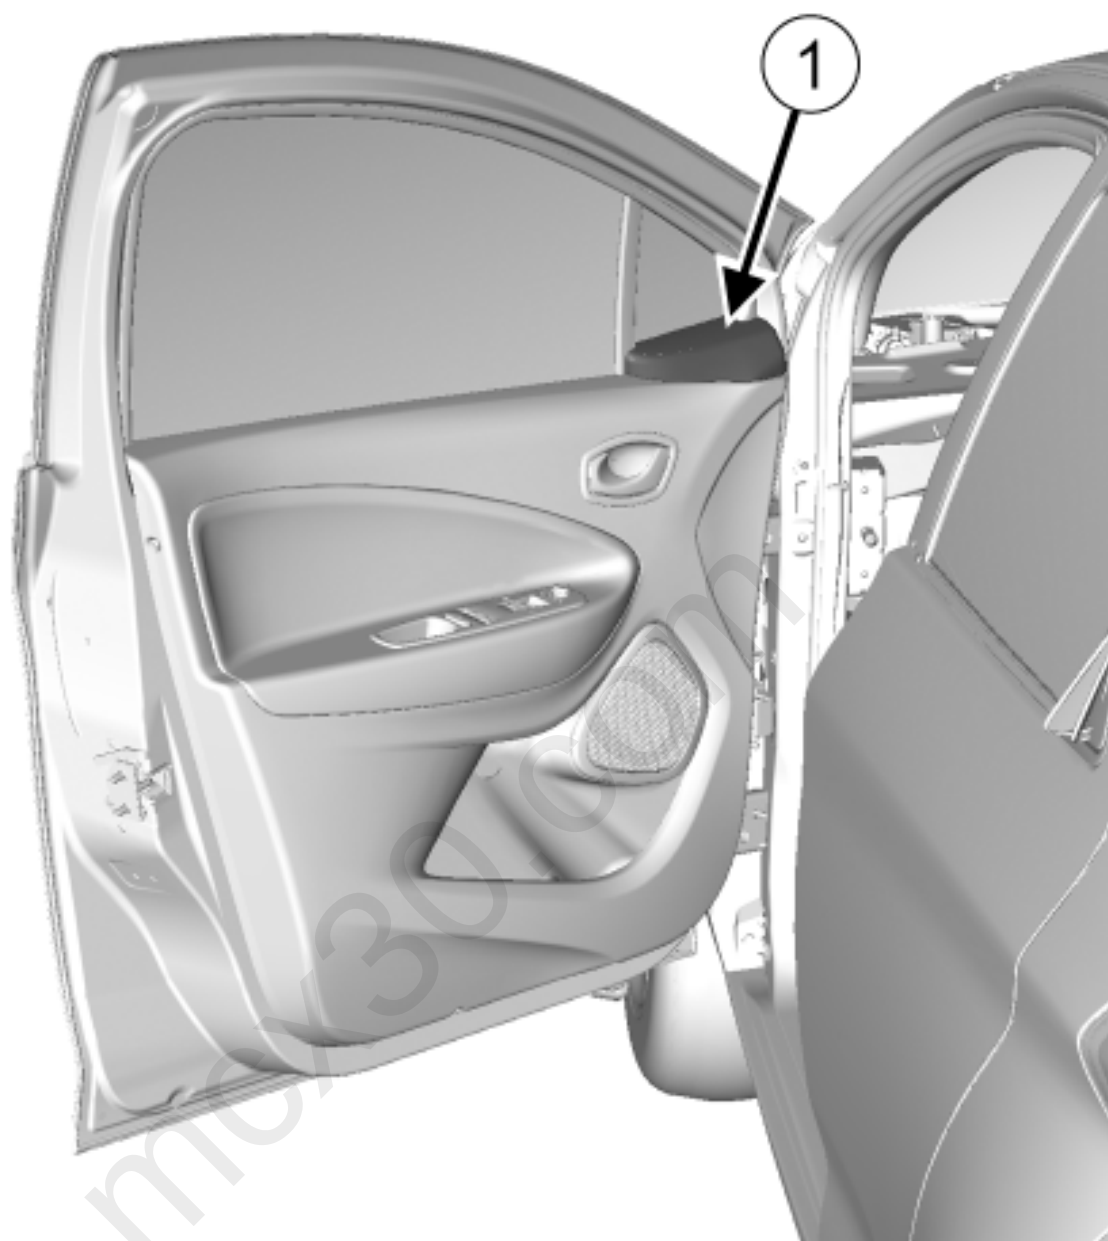


157002

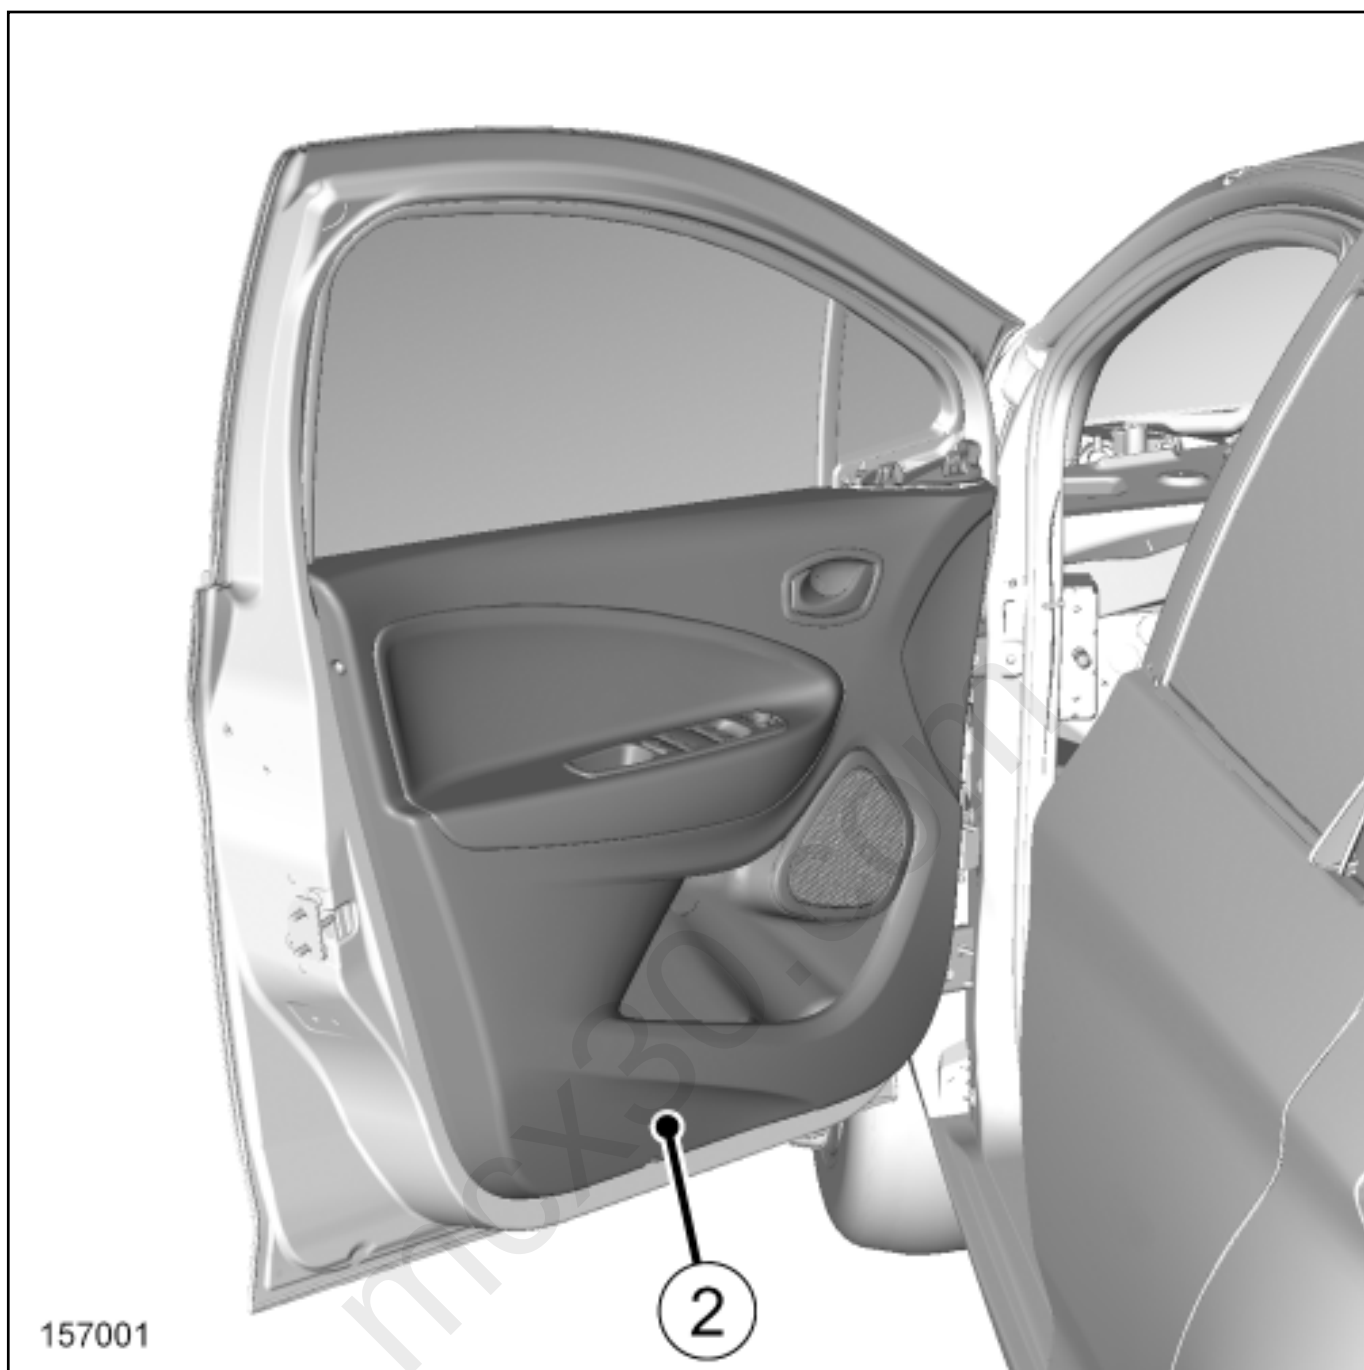

■ Remove:

- the trim piece of the front side opening element fixed window(1) ,
- the front side opening element trim(2) .

2. REMOVAL OPERATION

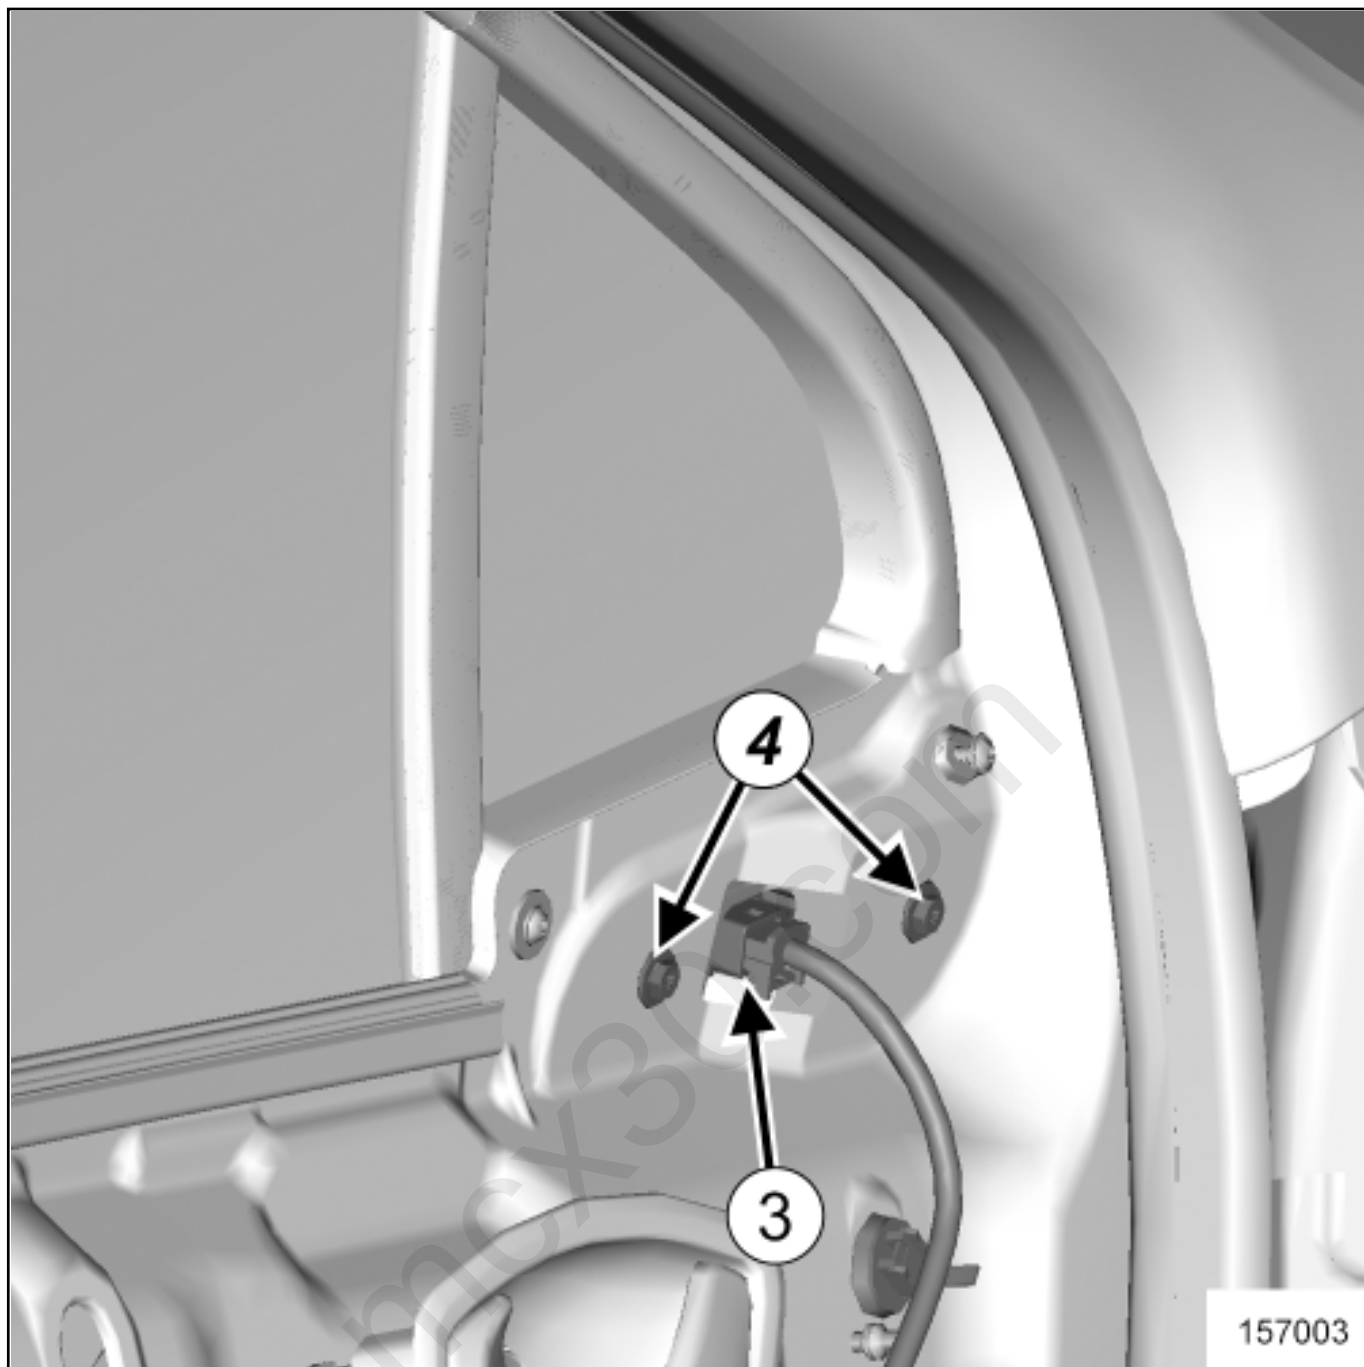


■ Disconnect the door mirror connector(3) .

■ Remove:

- the door mirror bolts(4) ,
- the door mirror.


1- IN THE EVENT OF A REPLACEMENT

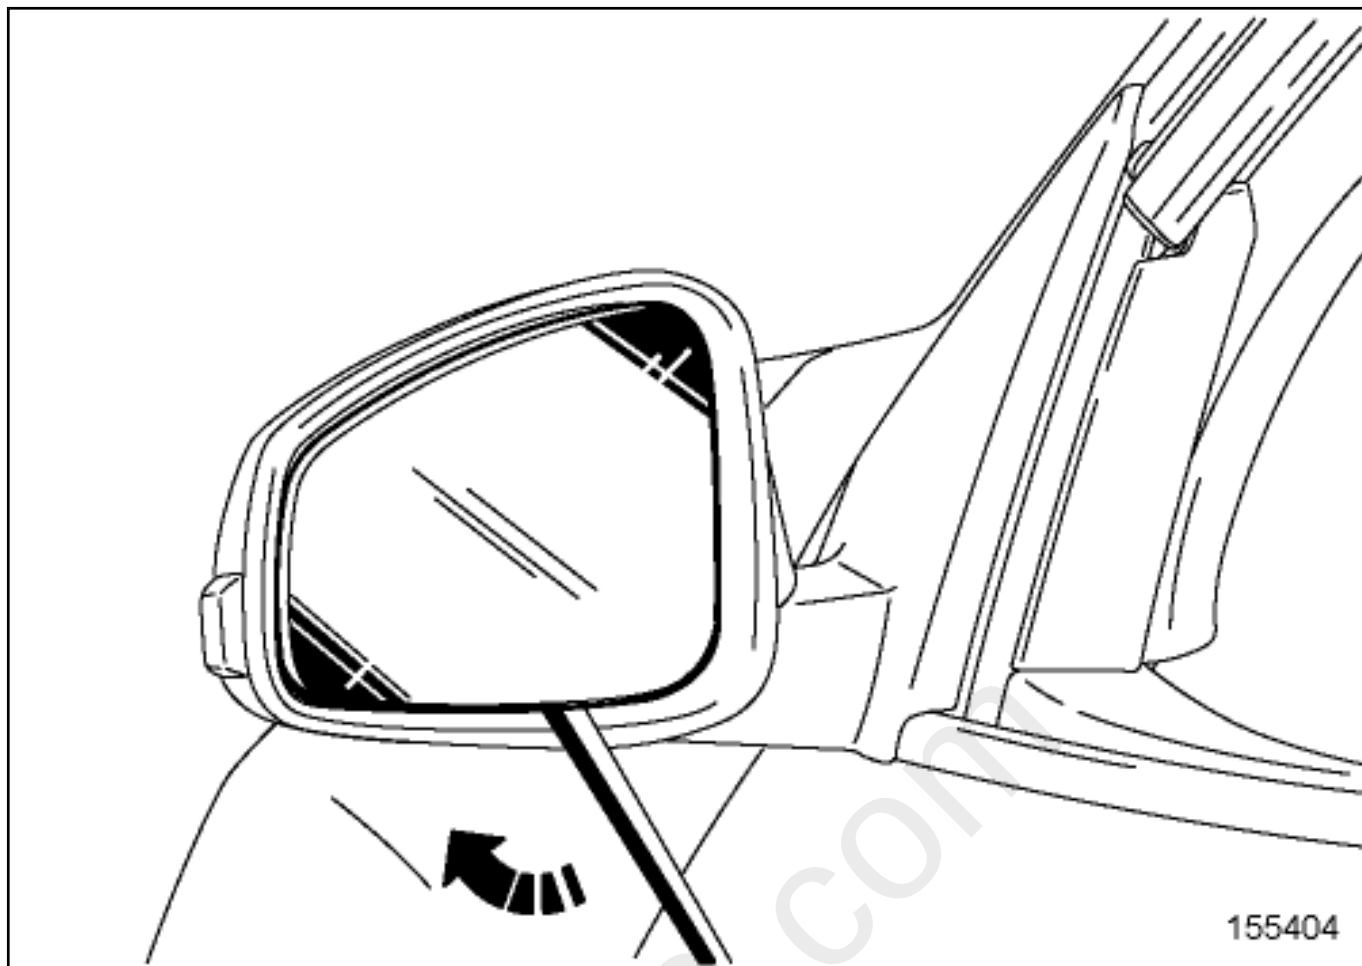


Protect the edges of the door mirror with masking tape.

Unclip the door mirror glass using the toolSet of trim removal levers.([Car. 1363](#)) .

Disconnect the connector.

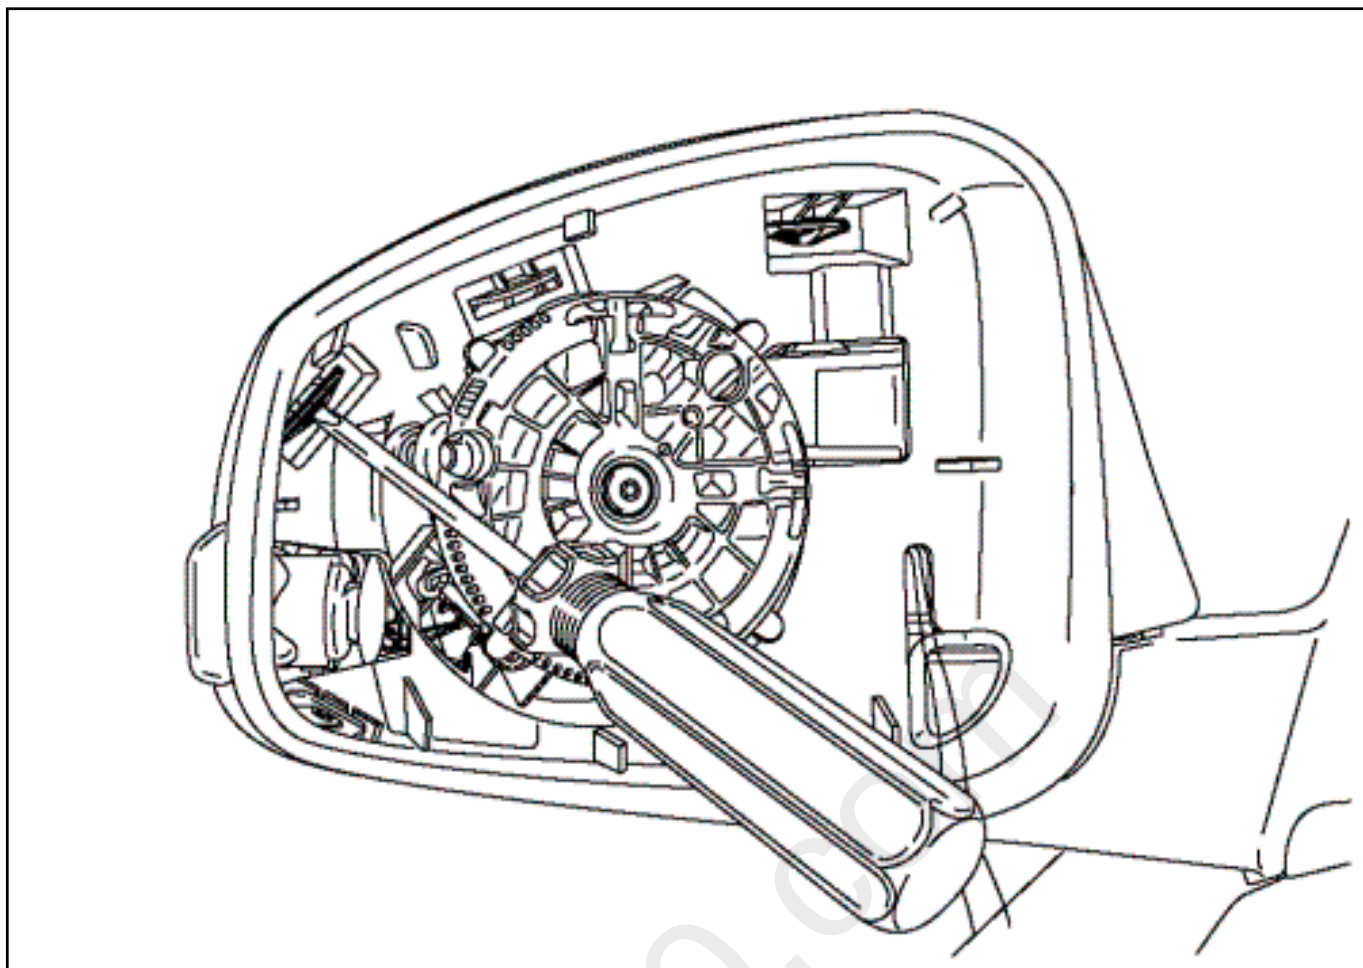

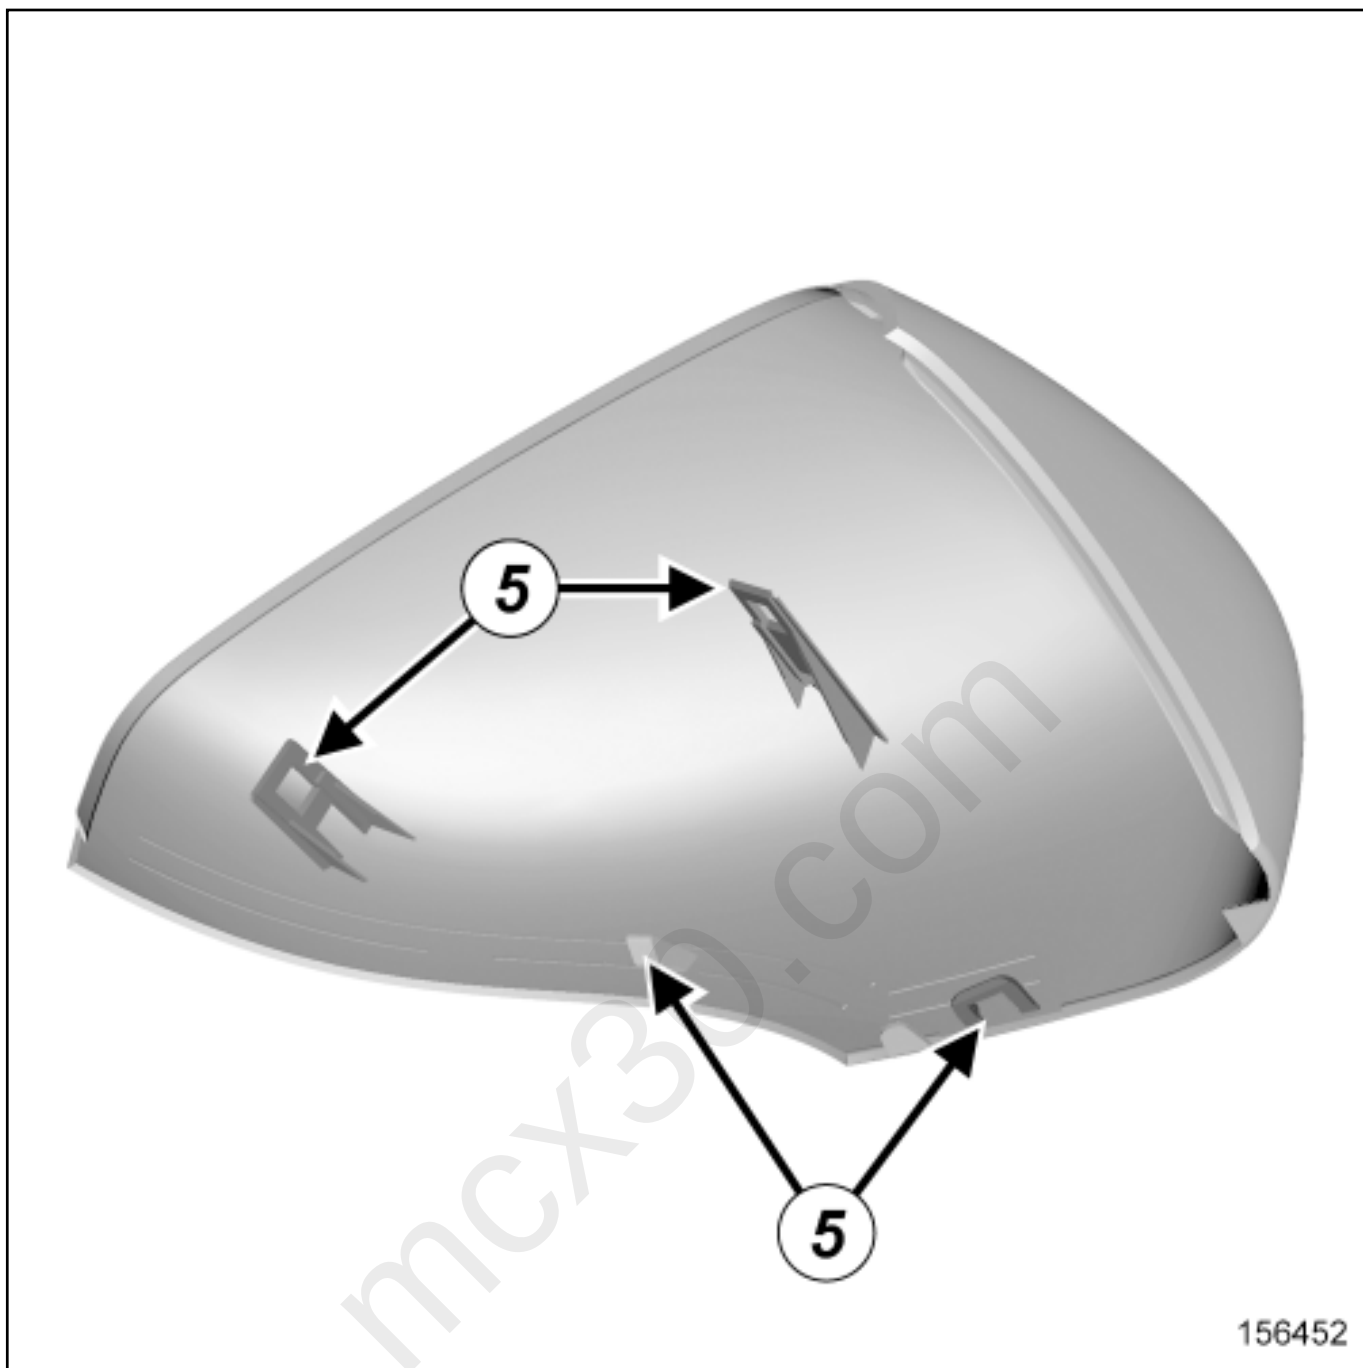

Unclip the door mirror casing at(5) using the toolSet of trim removal levers.([Car. 1363](#)) .

Remove the door mirror casing.

1. REFITTING OPERATION



Proceed in the reverse order to removal.

2. FINAL OPERATION



Connect the 12V supply circuit [12 V supply circuit : Lockout - Removal of lockout](#) .



Carry out a function test.



Repair-50x07x08x02-01x37-1-30-1.xml



XSL version : 3.02 du 22/07/11