

FRONT BRAKE DISC: DESCRIPTION

1. PREPARATION OPERATION FOR CHECK

Position the vehicle on a two-post lift [Vehicle: Towing and lifting](#) .


Remove the wheel in question [Wheel: Removal - Refitting](#) .

2. CHECKING OPERATION FOR PART CONCERNED




Note:

Use a Palmer type tool to check the thickness of the disc.

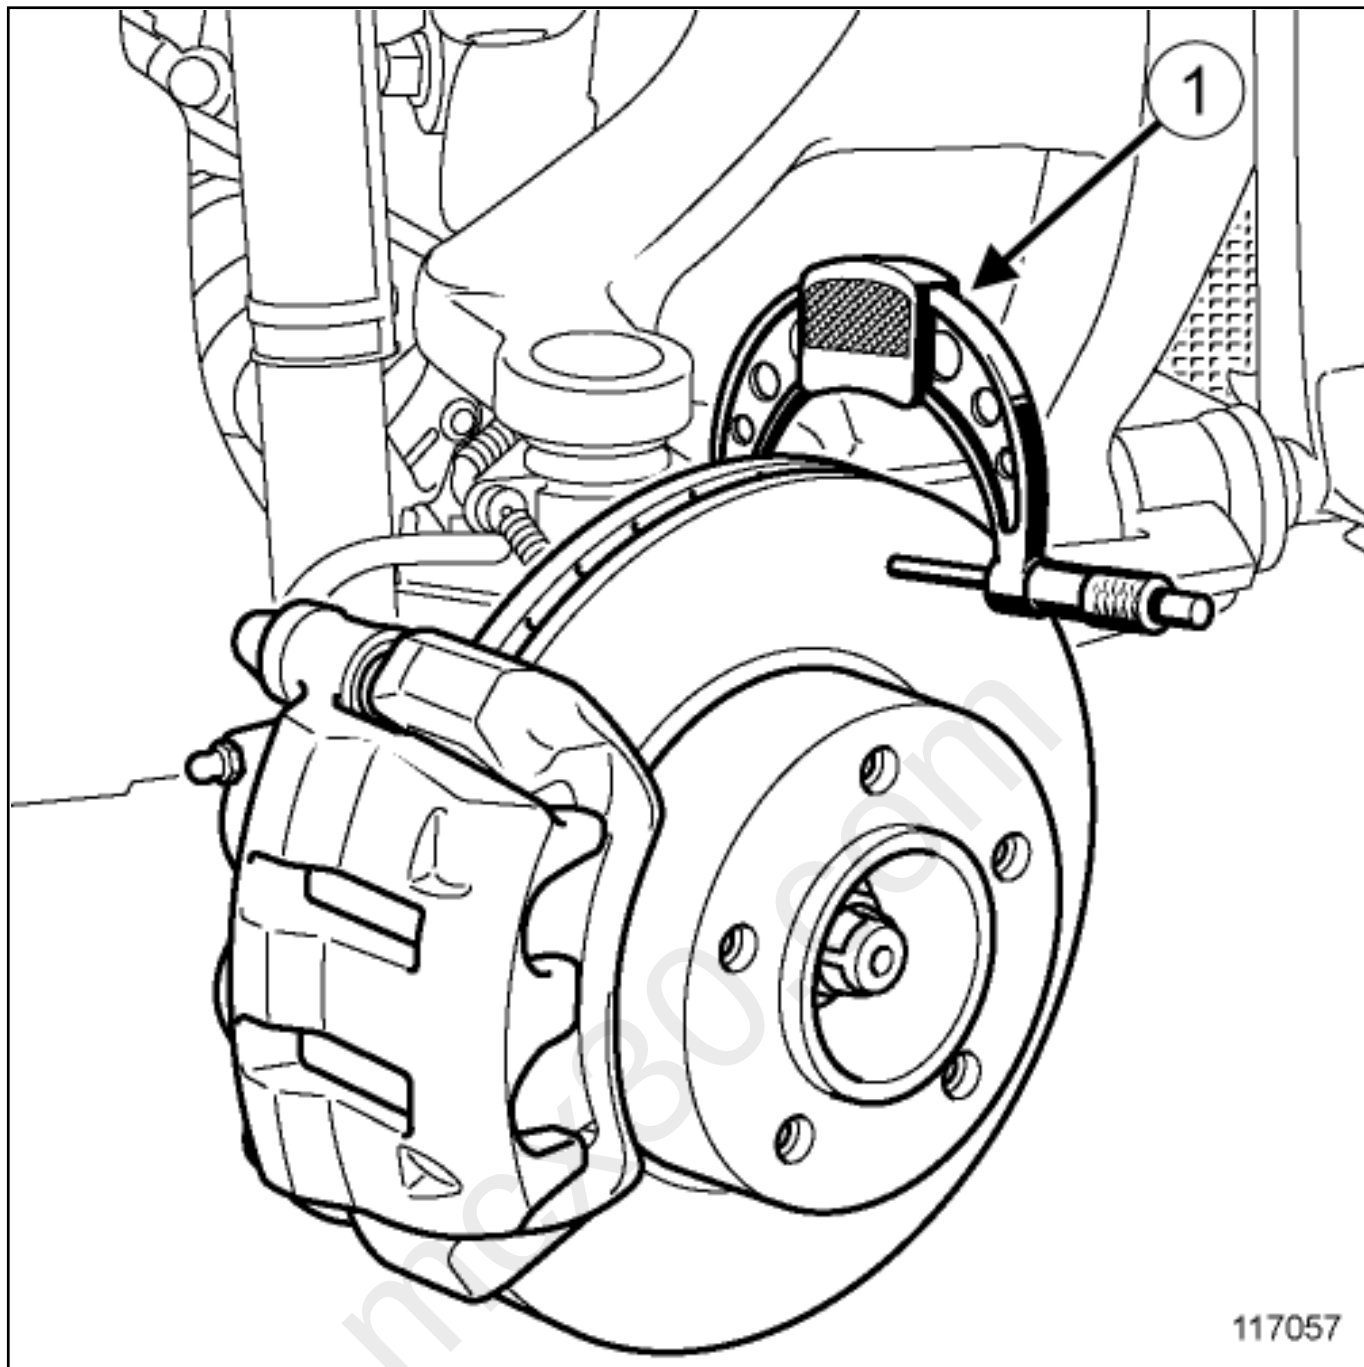

Position the Palmer tool(1) to measure the disc thickness.

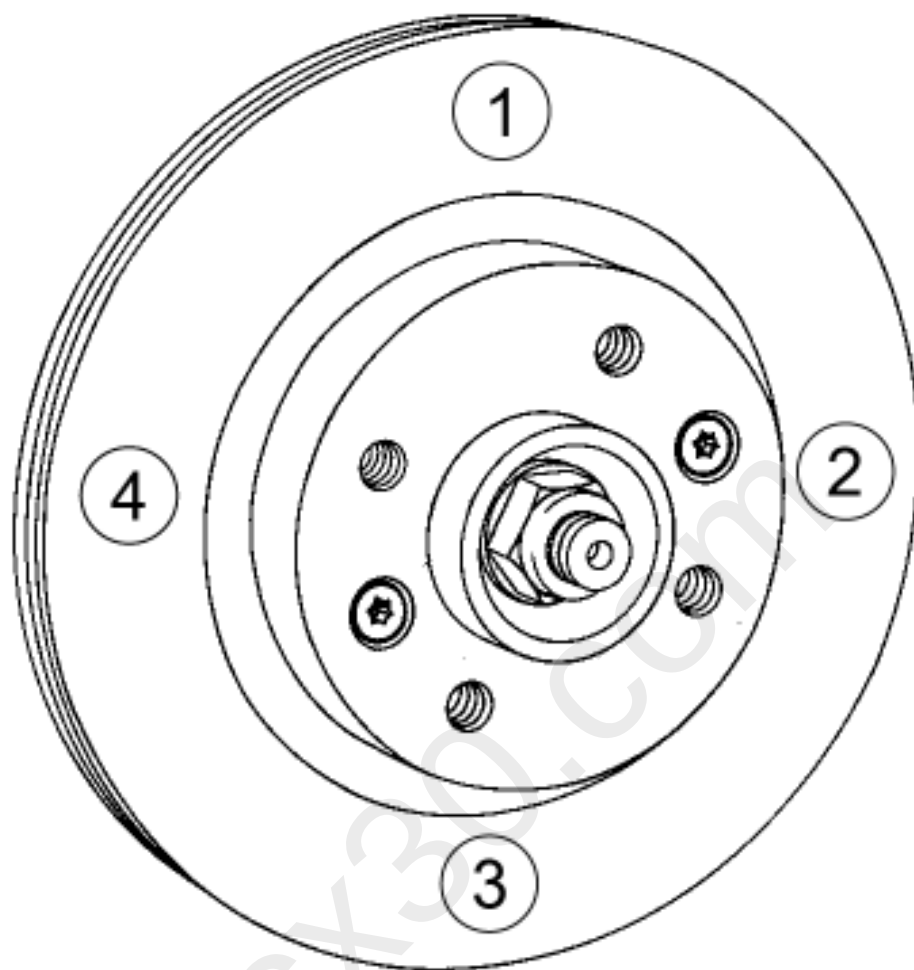

88310

Measure the thickness of the disc at 4 points in order (90° apart).

Compare the values with those recommended by the manufacturer [Brake: Specifications](#) .

3. FINAL OPERATION

Replace the discs if necessary ([see 31A, Front axle components, Front brake disc: Removal - Refitting](#)) .

Refit the wheel in question [Wheel: Removal - Refitting](#) .



Repair-13x03x03x03-02x21-1-25-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com