


FRONT OPENING ELEMENT: REMOVAL - REFITTING

Location and specifications (tightening torques, parts always to be replaced, etc.) [Front opening element mechanism assembly : Exploded view](#) .

REMOVAL

1. REMOVAL PREPARATION OPERATION

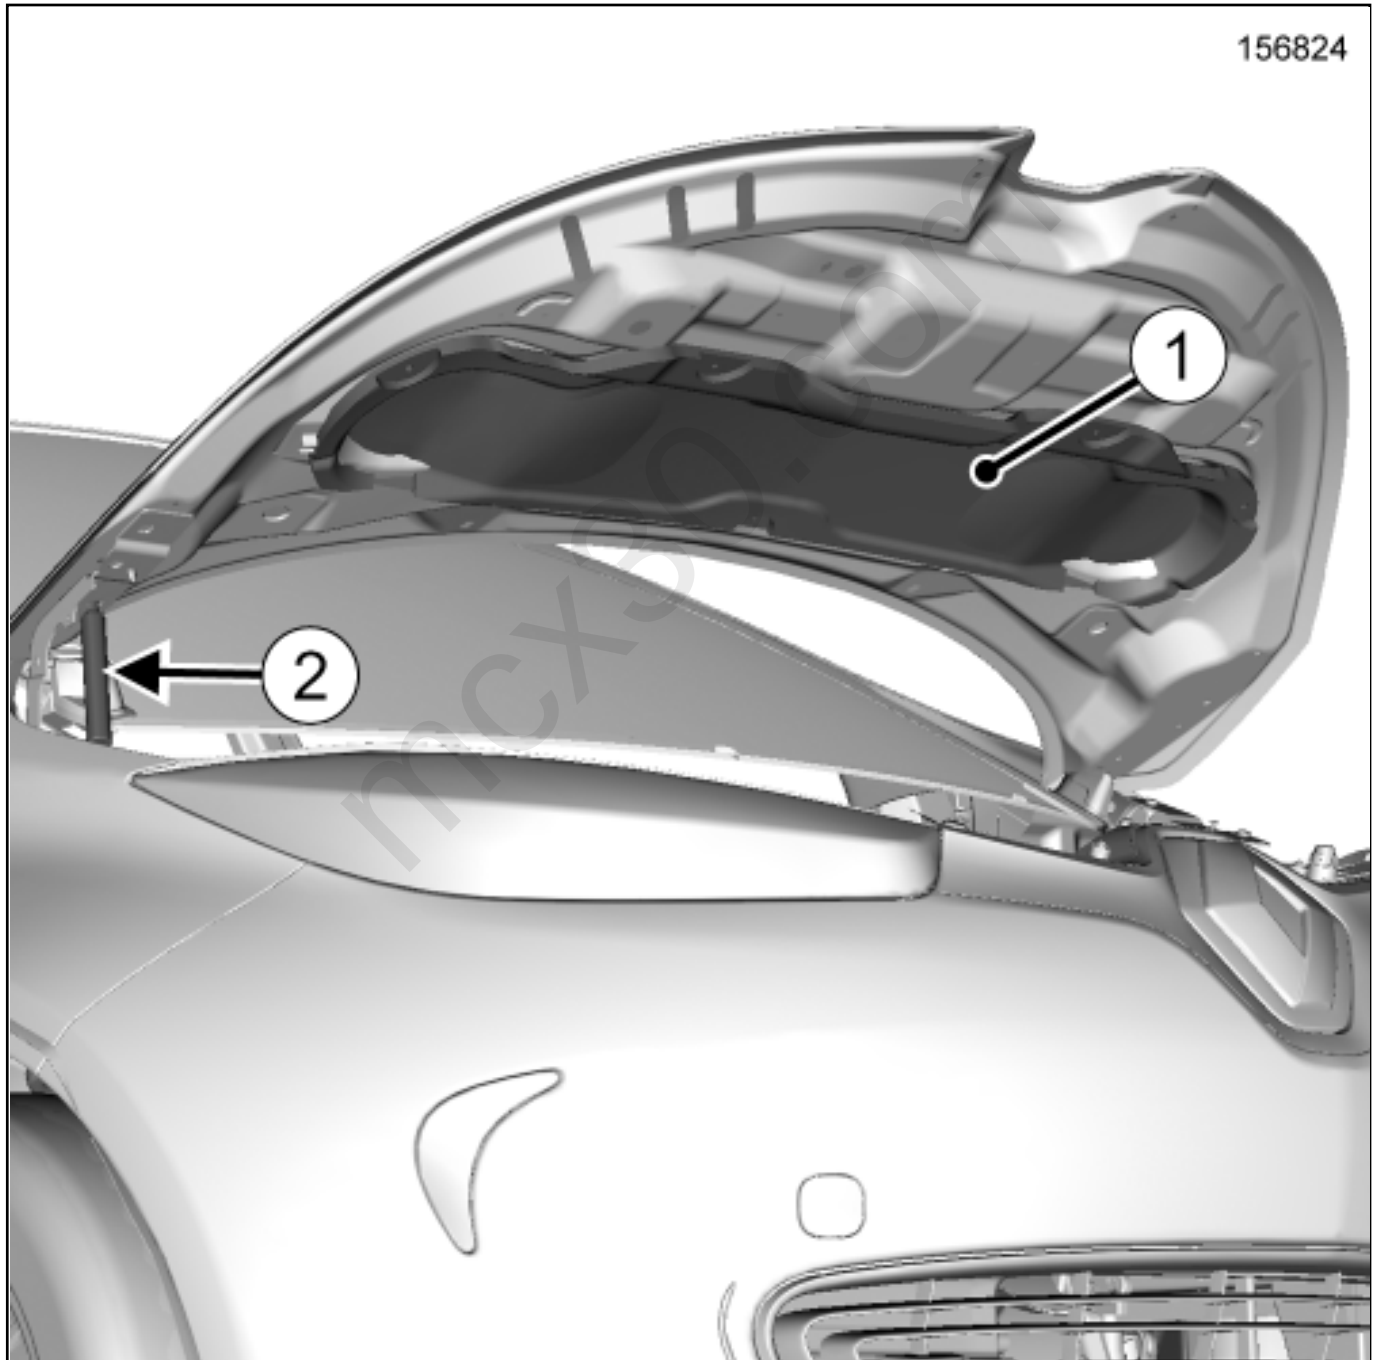

Remove:


- the bonnet soundproofing(1) ,
- the bonnet strut(2) .

■ Disconnect the screen washer jet pipes.

■ Unclip the screen washer pipes.

2. REMOVAL OPERATION

1- REMOVAL BY MEANS OF THE BONNET BOLTS

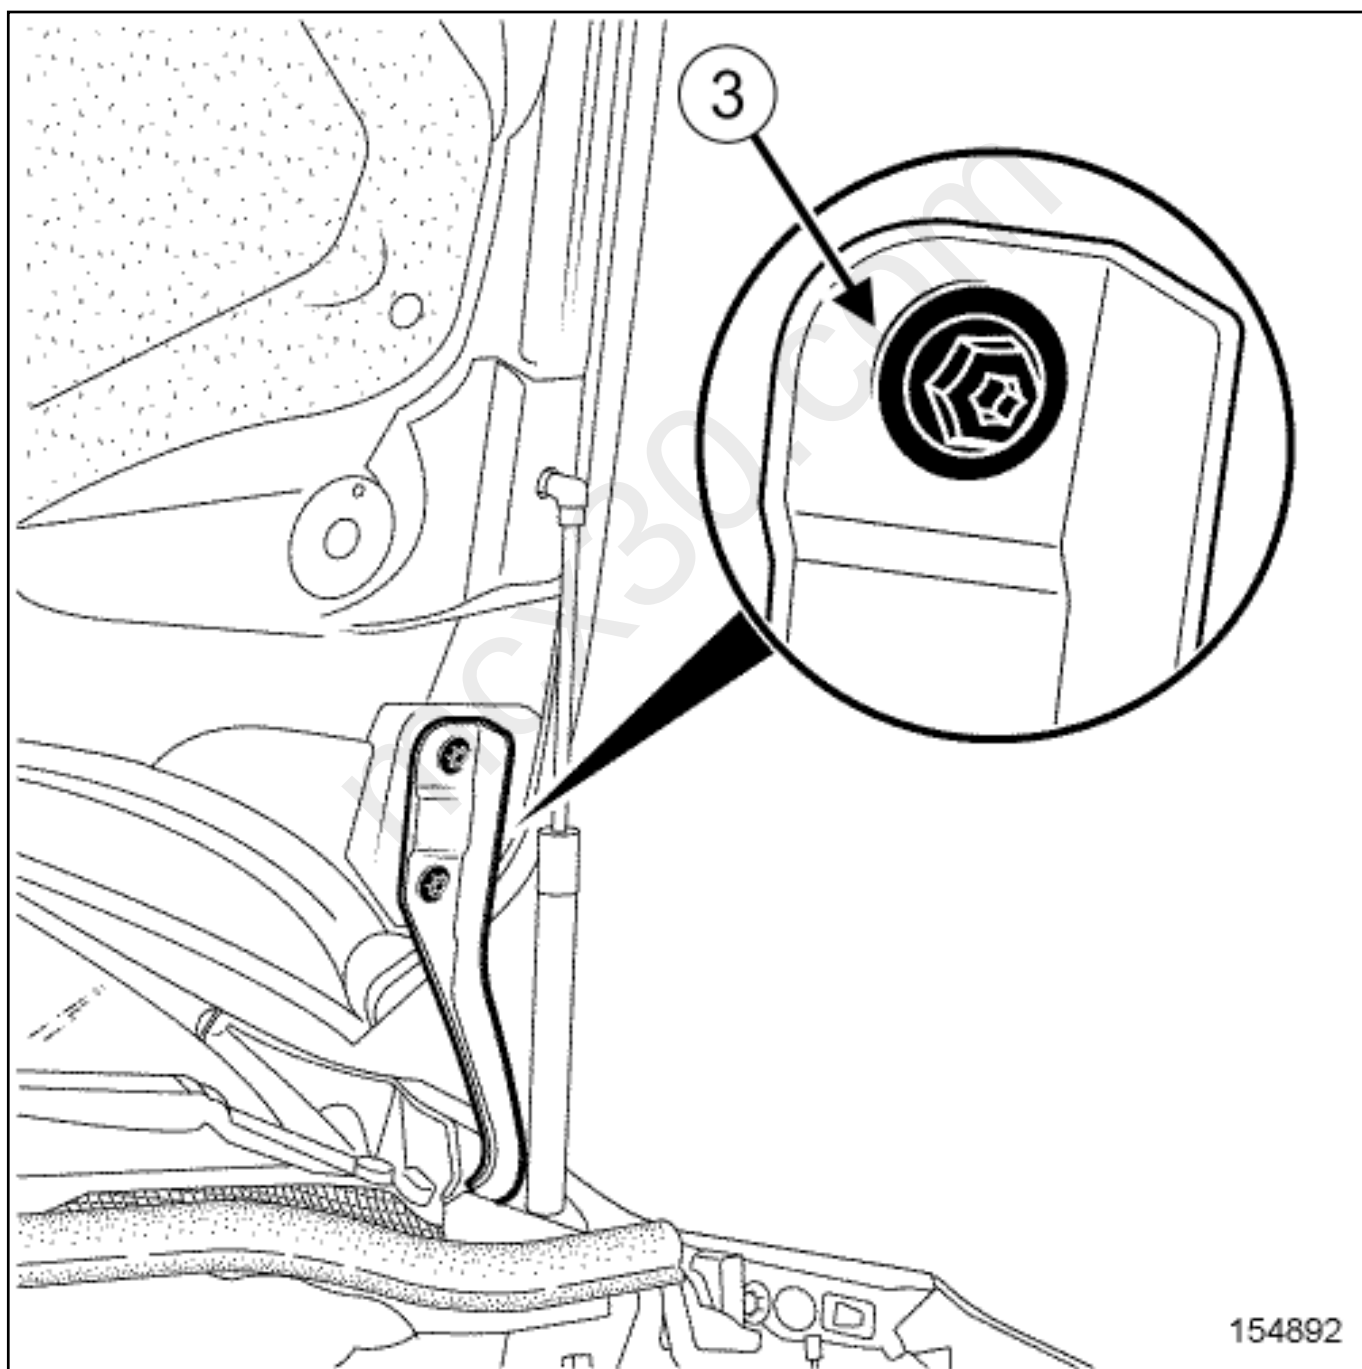

■ Remove [Front opening element mechanism assembly : Exploded view](#) :

- the bonnet bolts(3) ,
- the front opening element (this operation requires two people).

REFITTING

- Proceed in the reverse order to removal.
- Adjust the opening clearances and flush fitting([see 48A, Non-side opening elements, Front opening element: Adjustment](#)) .



Repair-40x10x09x01-01x37-1-4-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com