

MULTIFUNCTIONSWITCH :ADJUSTMENT



Note, one or more warnings are present in this procedure



WARNING



■ To avoid all risk of damage to the systems, apply the safety and cleanliness instructions and operation recommendations before carrying out any repair:


- [Wiring: Precautions for the repair](#) ,
- [Vehicle: Precautions for the repair](#) .

Locations and specifications (tightening torques, parts to always be replaced, etc.)([see 23C, Reduction gear, Electric traction reduction gearing assembly: Exploded view](#)) .

ADJUSTMENT

- Position the gear lever knob in "D".

BEFORE THE REFITTING OF THE MULTIFONCTION SWITCH

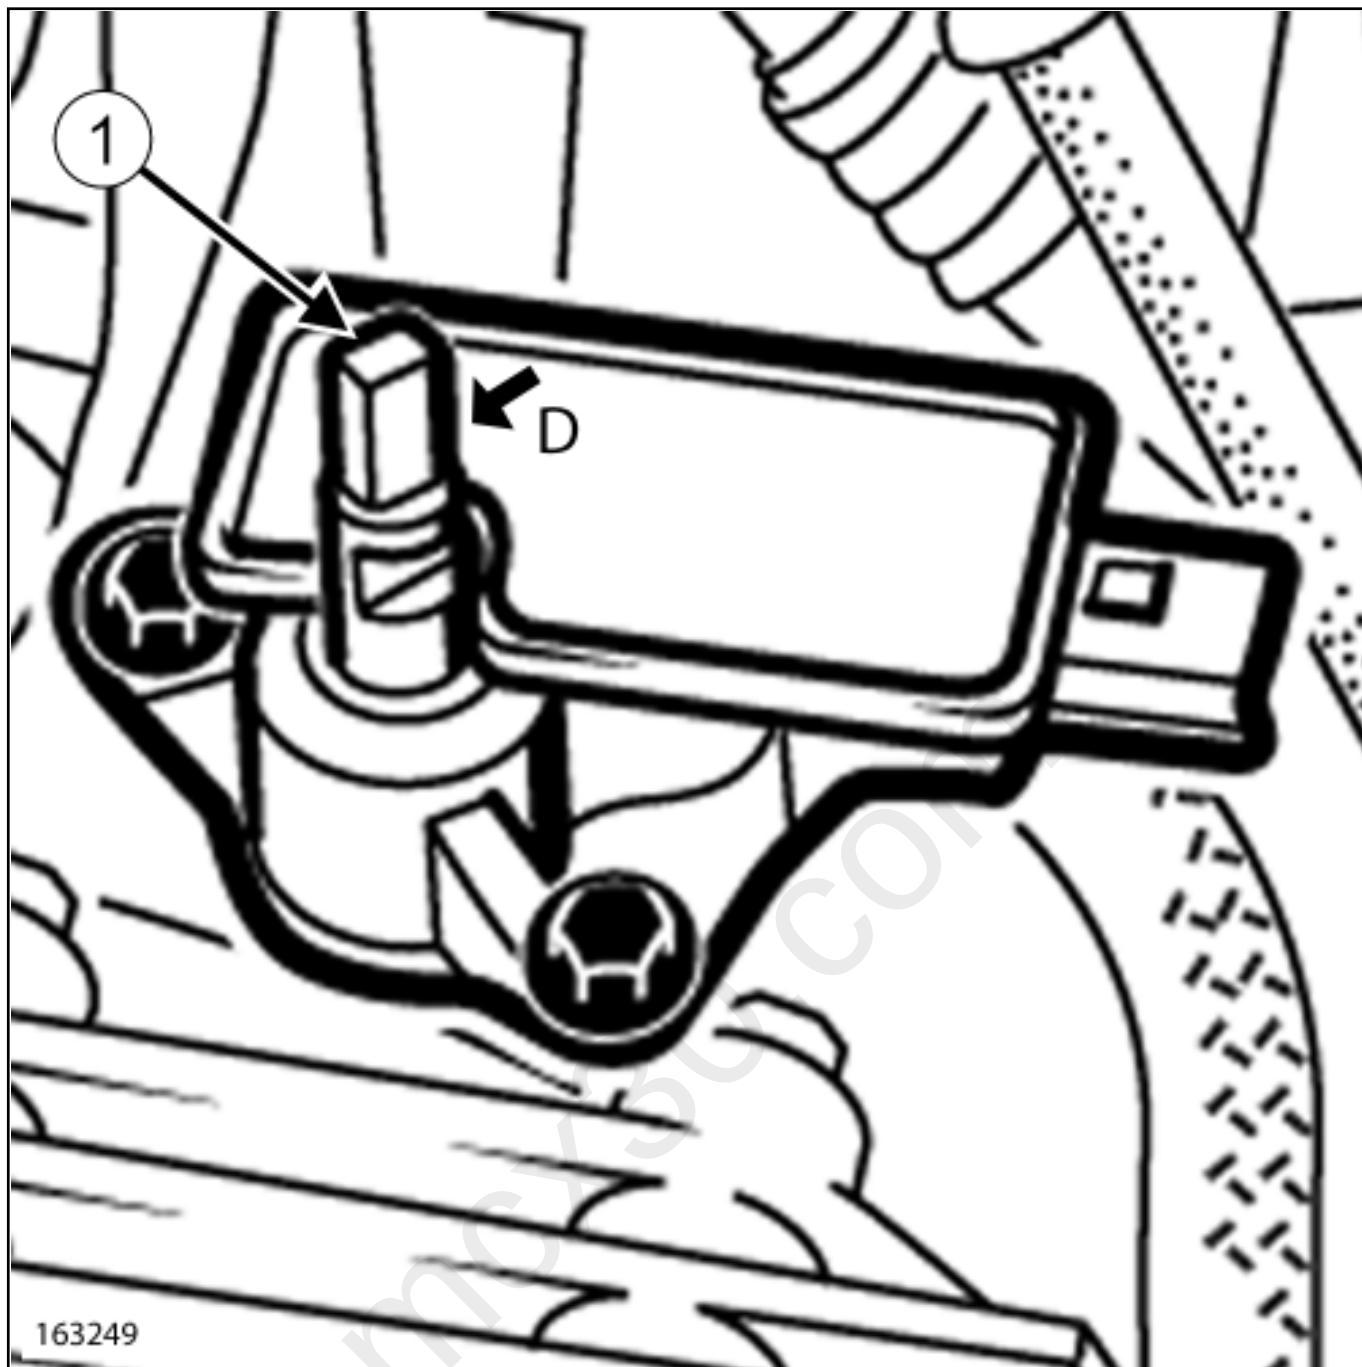

- Position the flat part(1) of the multifonction switch in the face of the arrow of the mark "D".



Repair-14x01x05x12-01x67-1-2-1.xml

