

REAR BUMPER: STRIPPING - REBUILDING



parts always to be replaced:




rear bumper rivet

Location and specifications (tightening torques, parts always to be replaced, etc.)[\(see 55A, Exterior protection, Rear bumper assembly: Exploded view\)](#) .

STRIPPING

1. STRIPPING PREPARATION OPERATION

- Position the vehicle on a two-post lift[Vehicle: Towing and lifting](#) .

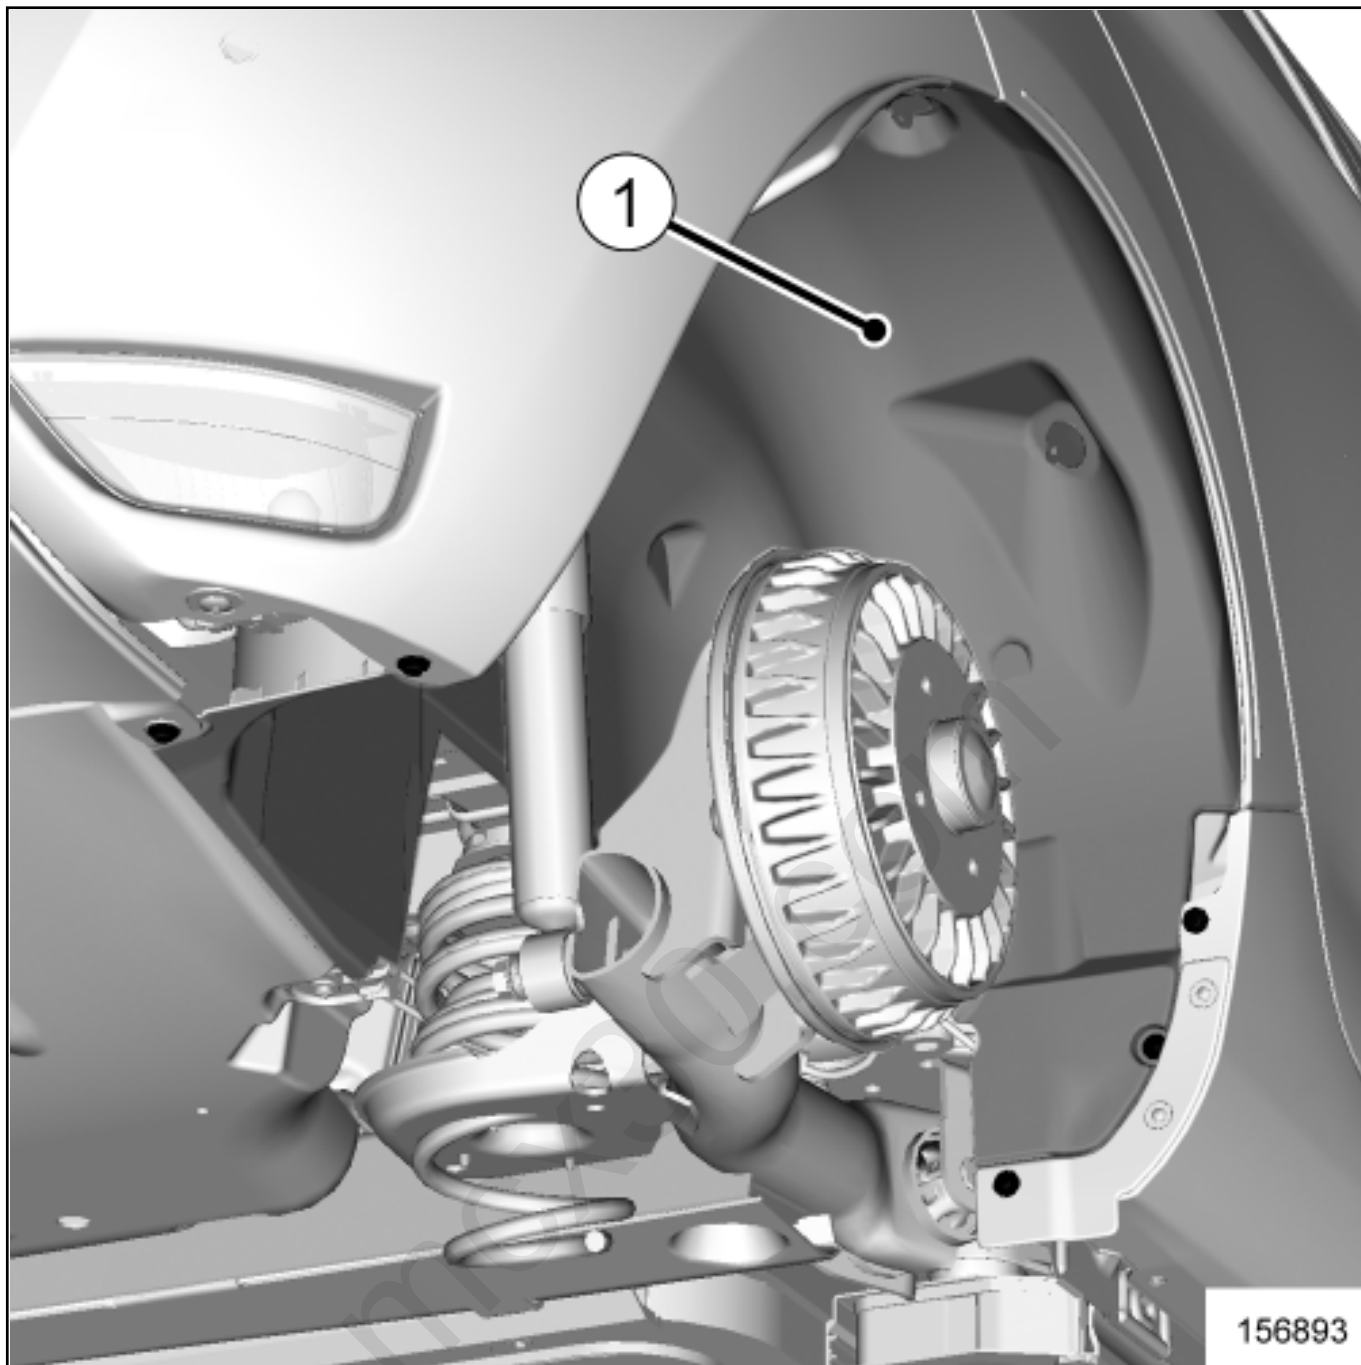

■ Remove:

- the rear wheels [Rear hub carrier assembly: Exploded view](#) ,
- the rear wheel arch liners(1) ,
- the rear lights on wing [Rear signals - lighting assembly: Exploded view](#) ,
- the rear bumper [\(see 55A, Exterior protection, Rear bumper assembly: Exploded view\)](#) .

2. STRIPPING OPERATION

■ Remove [\(see 55A, Exterior protection, Rear bumper assembly: Exploded view\)](#) :

- the rear bumper wiring,
- the reflectors,
- the side flaps,

- the rear bumper trim.

REBUILDING

1. REBUILDING PREPARATION OPERATION



parts always to be replaced:  **rear bumper rivet** .

2. REBUILDING OPERATION

-  Proceed in the reverse order to removal.



Repair-50x05x04-01x31-1-34-1.xml



XSL version : 3.02 du 22/07/11