

REAR SCREEN WIPER MOTOR: REMOVAL - REFITTING



Note, one or more warnings are present in this procedure



WARNING

Before carrying out any operation on a vehicle fitted with the Stop & Start system, always follow the safety instructions Vehicle: Precautions for the repair

REMOVAL

1. REMOVAL PREPARATION OPERATION

- Remove the lift the wiper arm ([see 85A, Wiping - Washing, Wiping and washing: List and location of components](#)) .


1- STEEL TAILGATE

- Remove the rear opening element trim ([see Rear opening element trim: Removal - Refitting](#)) .

2- PLASTIC TAILGATE

2. REMOVAL OPERATION

1- STEEL TAILGATE

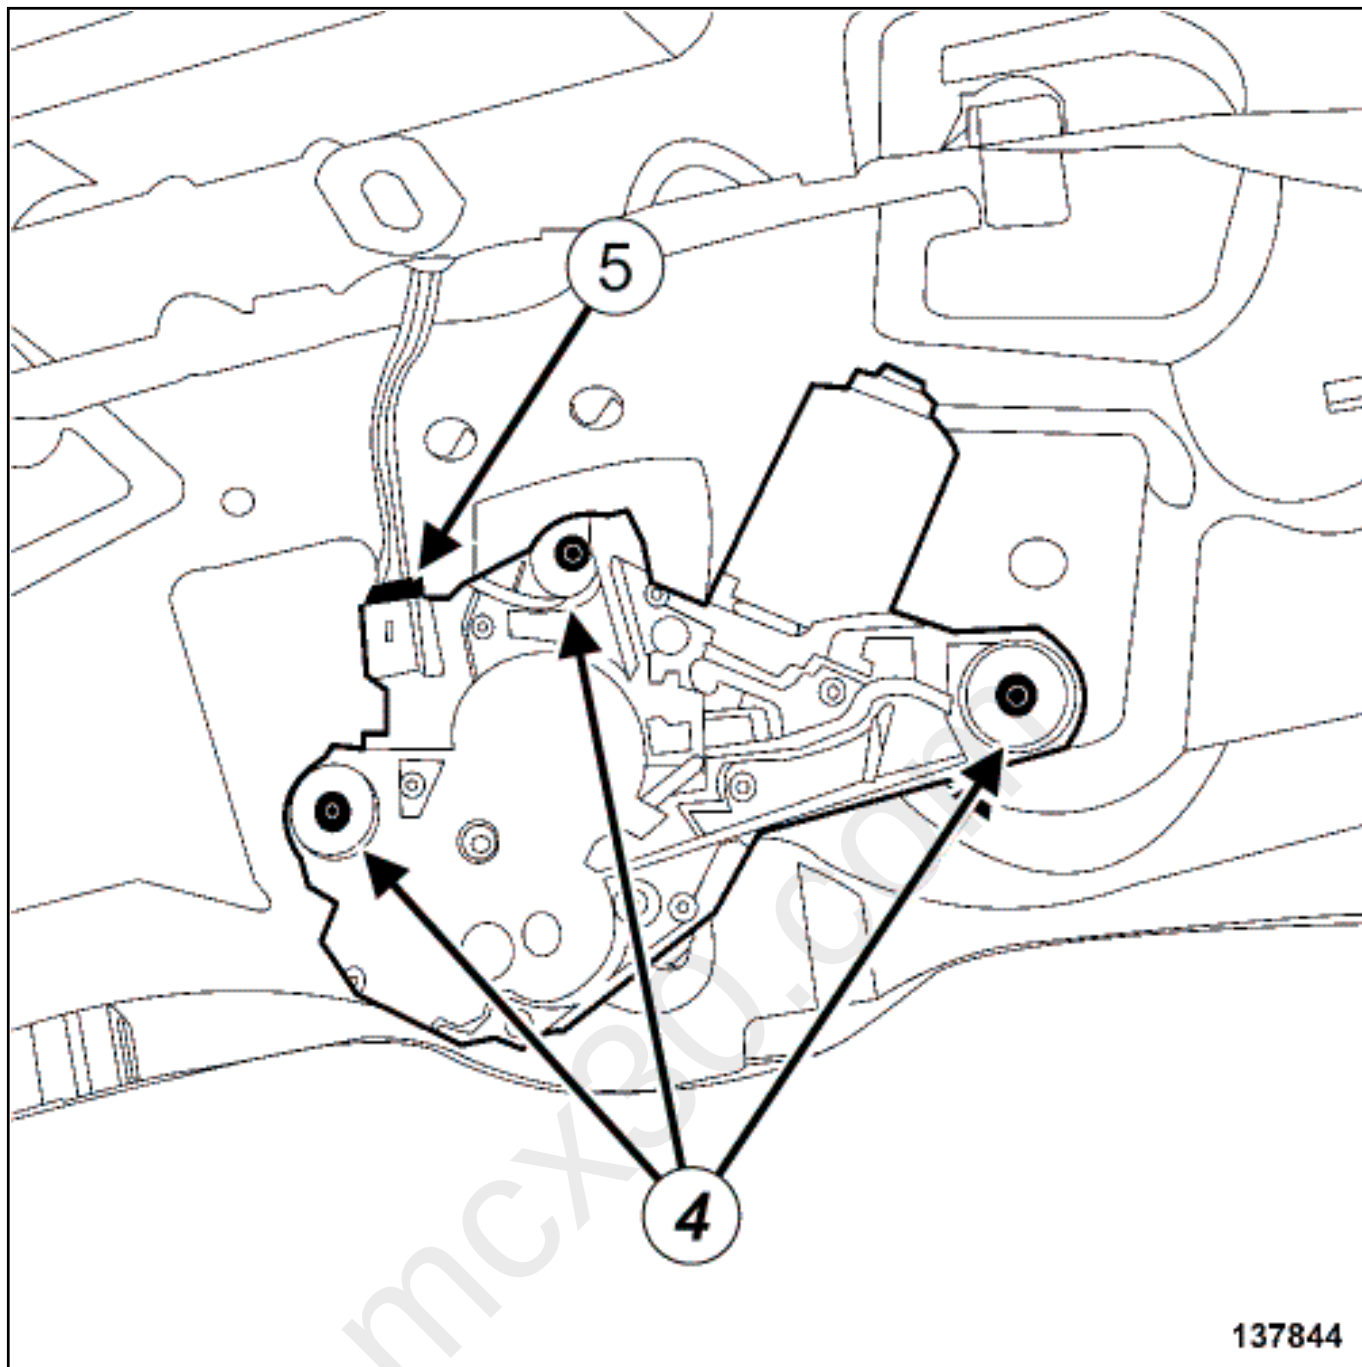

137844

- Disconnect the rear screen wiper motor connector(5) .
- Remove the rivets(4) from the rear screen wiper motor.

2- PLASTIC TAILGATE

REFITTING

1. REFITTING OPERATION FOR PART CONCERNED

■ Parts always to be replaced :

- rivets

■ Refit:

- the rear screen wiper motor,
- the new rivets to the rear screen wiper motor .

Note:



only for the plastic tailgate.

Replace the rivet by screw 77 03 602 059 and the nut 77 03 033 181.

Position the nut on the outside

■ Connect the rear screen wiper motor connector.

2. FINAL OPERATION

■ Proceed in the reverse order to removal.



Repair-80x04x04x02-01x37-1-30-1.xml



XSL version : 3.02 du 22/07/11