

18	*	*	Not Used
19	VME91 (WH-BN)	22	CTRL MOD. - SATELLITE DIGITAL RADIO DATA LINK (-) (SDL-L)
20	RMEA0 (WH)	26	MICROPHONE - AMBIENT NOISE 3 -
21	RMN14 (GY)	26	CTRL MOD. - NAVIGATION/BLEETOOTH/MULTIMEDIA GATEWAY MODULE # AUDIO OUT (MONO) -
22	VMEA8 (GN-WH)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT REAR NEG (-) (ANC3)
23	*	*	Not Used
24	*	*	Not Used
25	RME52 (GY)	26	CTRL MOD. - BLEETOOTH/MULTIMEDIA GATEWAY MODULE # AUDIO [SATELLITE DIGITAL RADIO] LEFT -
26	RME53 (BN)	26	CTRL MOD. - BLEETOOTH/MULTIMEDIA GATEWAY MODULE # AUDIO [SATELLITE DIGITAL RADIO] RIGHT -
26	RME53 (BN-WH)	26	CTRL MOD. - BLEETOOTH/MULTIMEDIA GATEWAY MODULE # AUDIO [SATELLITE DIGITAL RADIO] RIGHT -

CONNECTOR VIEWS > CONNECTOR END VIEW C251 - DATA LINK CONNECTOR (DLC)

Connector: C251

Description

DATA LINK CONNECTOR (DLC)

Color

BK

Harness


PIA

Base Part #

14489

Service Pigtail

See Below

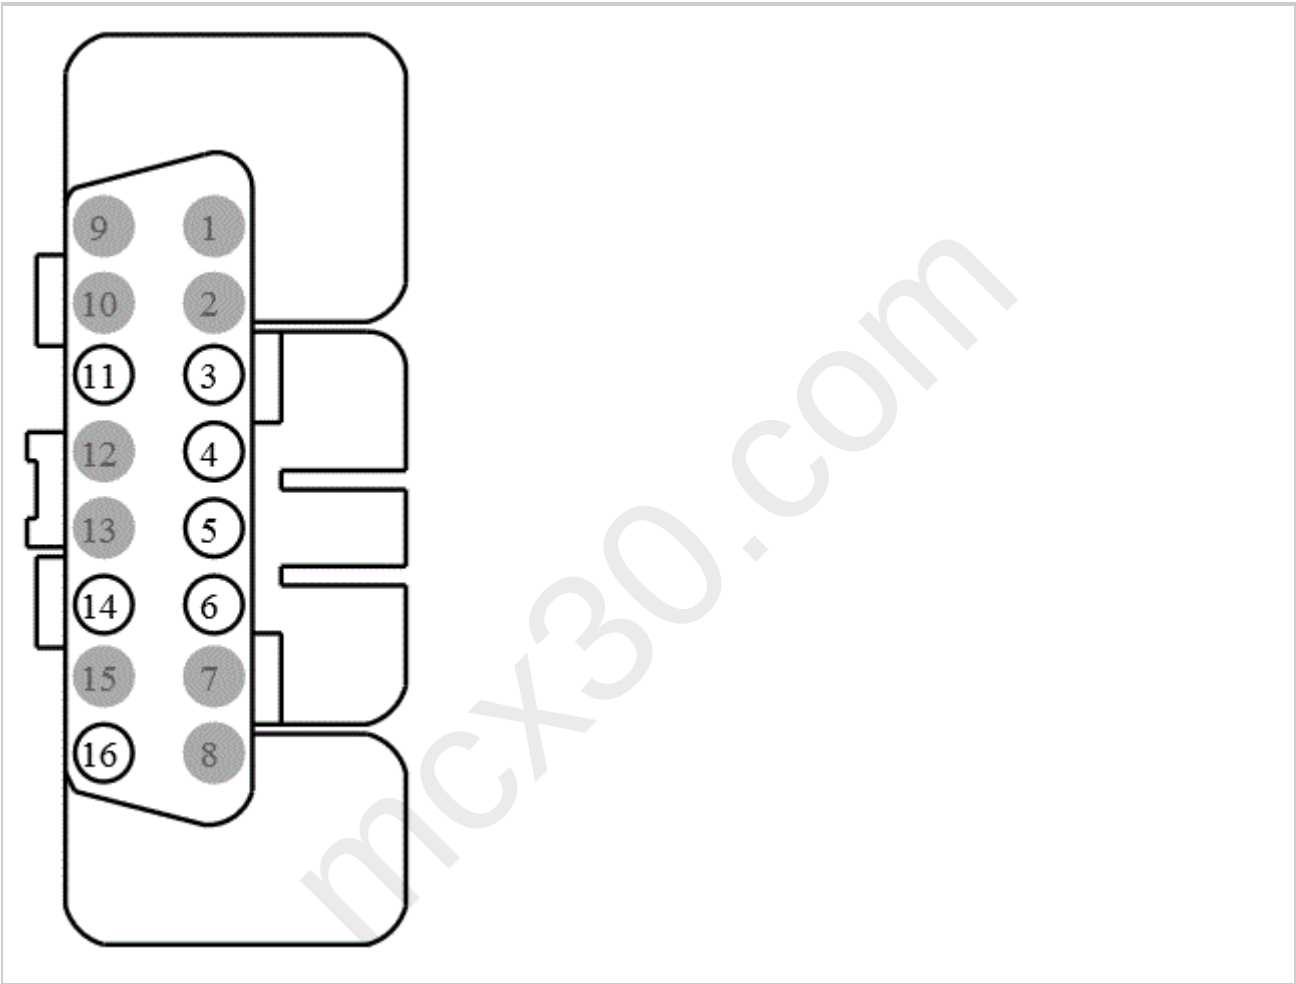

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	*	*	Not Used	
2	*	*	Not Used	
3	* (*)	*	CONNECTOR - DIAGNOSTIC # CAN BUS HIGH SPEED 2 (UPPER) HIGH	

4	* (*)	*	GROUND - INSTRUMENT PANEL STRUCTURE # 2ND POINT
5	* (*)	*	GROUND - INSTRUMENT PANEL STRUCTURE
6	* (*)	*	CONNECTOR - DIAGNOSTIC # CAN BUS HIGH SPEED HIGH
7	*	*	Not Used
8	*	*	Not Used
9	*	*	Not Used
10	*	*	Not Used
11	* (*)	*	CONNECTOR - DIAGNOSTIC # CAN BUS HIGH SPEED 2 (UPPER) LOW
12	*	*	Not Used
13	*	*	Not Used
14	* (*)	*	CONNECTOR - DIAGNOSTIC # CAN BUS HIGH SPEED LOW
15	*	*	Not Used
16	* (*)	*	FUSE - 15 OR CIRCUIT BREAKER

Available Pigtail Kits

Pigtail Kit Part Number

WPT-1176

Service Part Number:

AU2Z-14S411-BFA

Gauge: