

PUBLISHED: 12-SEP-2019
2020.0 DEFENDER (LE), 206-05

PARKING BRAKE AND ACTUATION

ELECTRIC PARK BRAKE SWITCH (G2414327)

mcx30.com

REMOVAL

 NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations for left hand drive vehicles, right hand drive vehicles are similar.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the instrument panel lower trim.

Refer to: [Instrument Panel Lower Trim](#) (501-12 Instrument Panel and Console, Removal and Installation).

- 3.

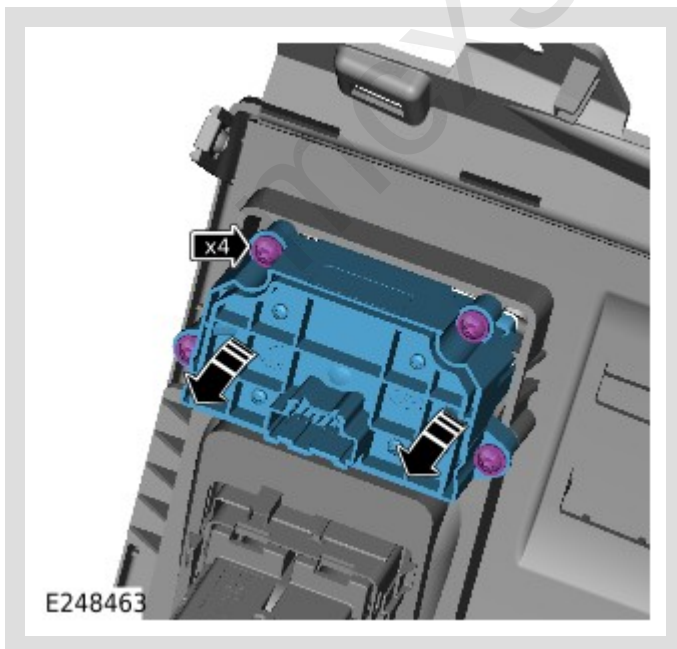

- Remove the 4 screws.
- Remove the Electric Park Brake (EPB) switch.

INSTALLATION

1.

- Install the Electric Park Brake (EPB) switch.
- Install and tighten the 4 screws.

Torque: 1.5Nm

2.

Install the instrument panel lower trim.

Refer to: [Instrument Panel Lower Trim](#) (501-12 Instrument Panel and Console, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).