

PUBLISHED: 24-OCT-2019
2020.0 DEFENDER (LE), 412-02

AUXILIARY CLIMATE CONTROL

ELECTRIC BOOSTER HEATER – RIGHT HAND DRIVE

[G2323742]

mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the climate control assembly.

Refer to: [Climate Control Assembly](#) (412-01 Climate Control, Removal and Installation).

- 3.

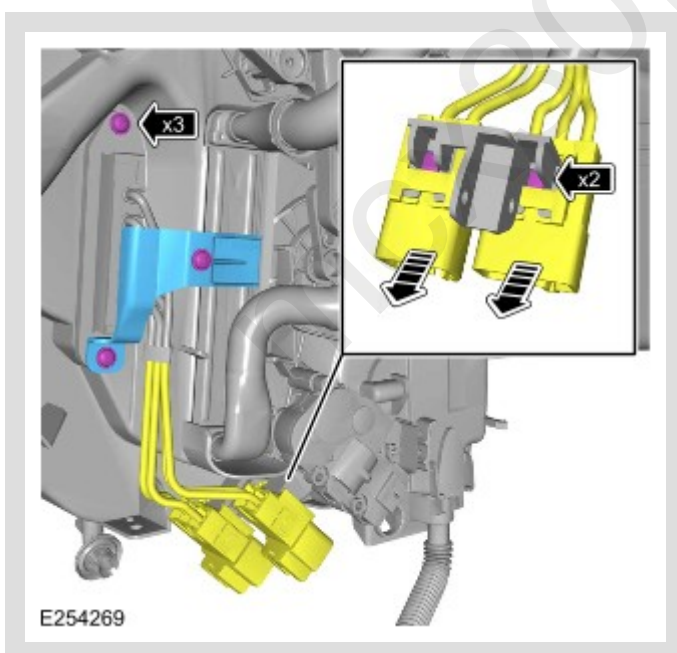


- Release the 2 electrical connectors from the climate control assembly.
- Remove the 3 screws.
- Remove the wiring harness cover.

4.

⚠ CAUTION:

Take extra care not to damage the component.

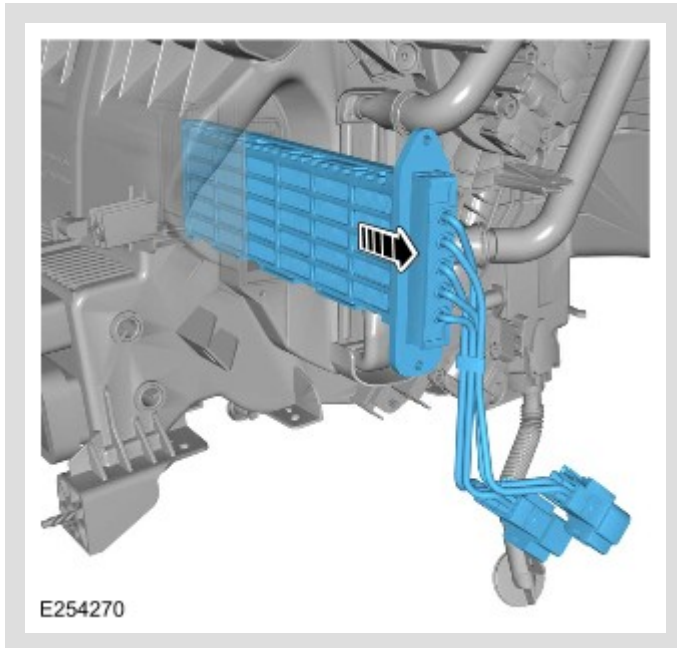

Remove the electric booster heater.

INSTALLATION

1.

⚠ CAUTION:

Take extra care not to damage the component.

- Install the electric booster heater.
- Install the wiring harness cover to the climate control assembly.
- Install and tighten the 3 screws.
Torque: 1.2Nm
- Install the 2 electrical connectors to the climate control assembly.

2.

Install the climate control assembly.

Refer to: [Climate Control Assembly](#) (412-01 Climate Control, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

