

PUBLISHED: 19-SEP-2019
2020.0 DEFENDER (LE), 414-01B

BATTERY, MOUNTING AND CABLES – VEHICLES WITH: MHEV

MHEV BATTERY COOLING FAN (G2422547)

mcx30.com

REMOVAL


**NOTE:**

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.

1. Disconnect the startup battery ground cable.
Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the MHEV battery housing air duct.
Refer to: MHEV Battery Housing Air Duct (414-01, Removal and Installation).

- 3.

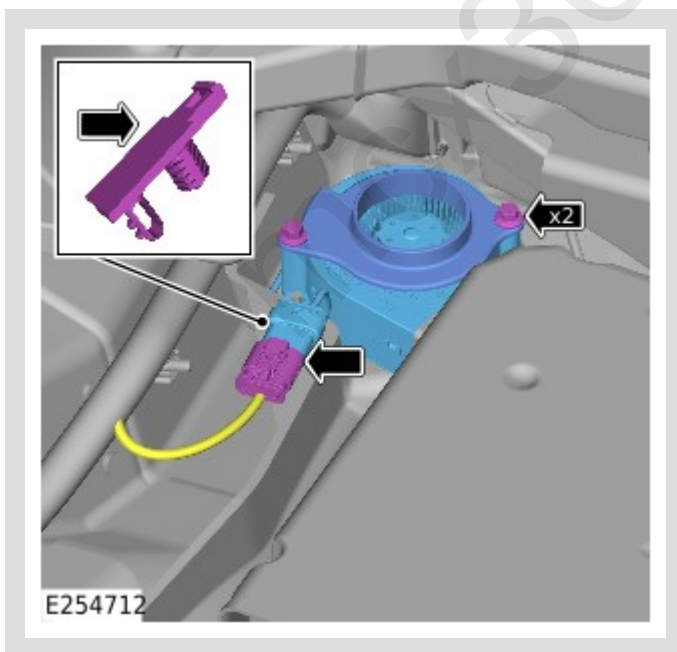

- Disconnect the electrical connector.
- Release the wiring harness clip.
- Remove the 2 bolts.
- Remove the MHEV battery cooling fan.

INSTALLATION

1.

- Install the MHEV battery cooling fan.
- Install and tighten the 2 bolts.
Torque: 3.2Nm
- Install the wiring harness clip.
- Connect the electrical connector.

2.

Install the MHEV battery housing air duct.

Refer to: MHEV Battery Housing Air Duct (414-01, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).