

PUBLISHED: 28-NOV-2019
2020.0 DEFENDER (LE), 415-01

INFORMATION AND ENTERTAINMENT SYSTEM

DAB3 ANTENNA AMPLIFIER – 110 (G2413596)

mcx30.com

REMOVAL



NOTE:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1. Disconnect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).

2. Remove the left loadspace trim panel.



Refer to: [Left Loadspace Trim Panel - 110, Vehicles With: 5 Seats](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

Refer to: [Left Loadspace Trim Panel - \[+\] 7 Seat Configuration, 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

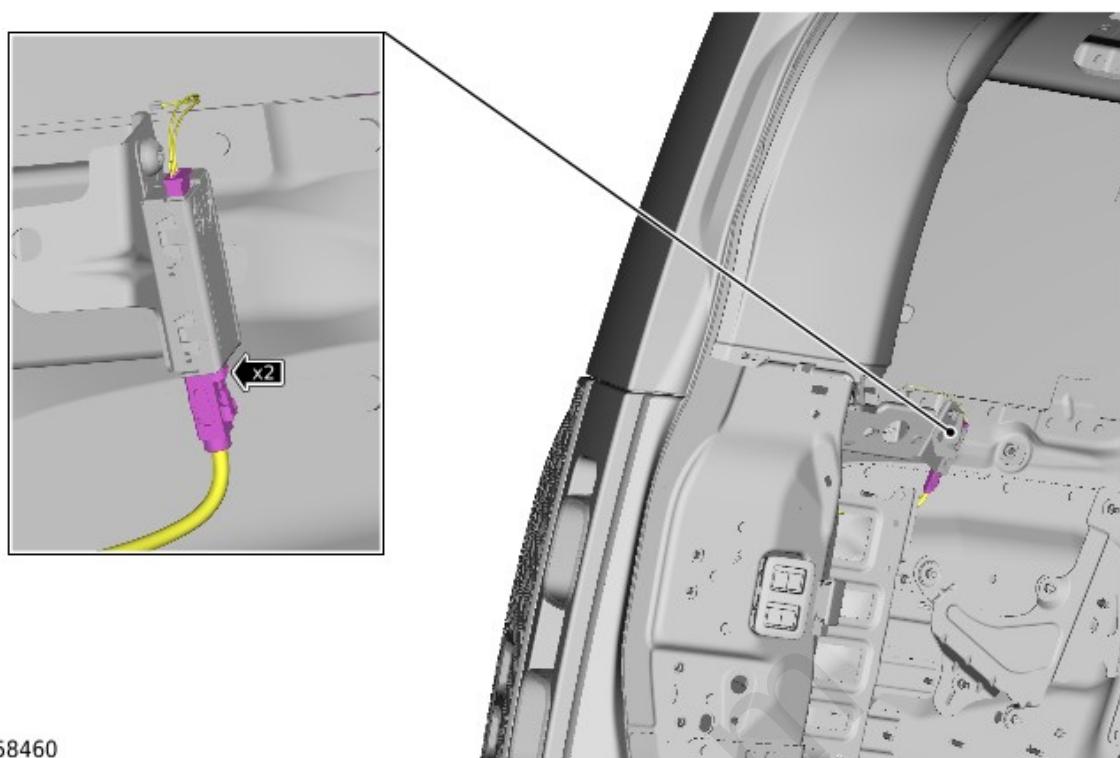

E258460

Disconnect the 2 electrical connectors.

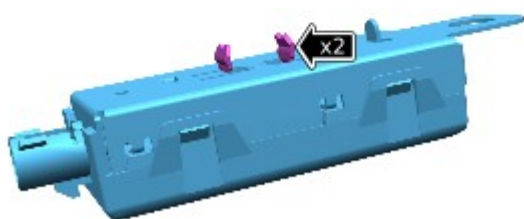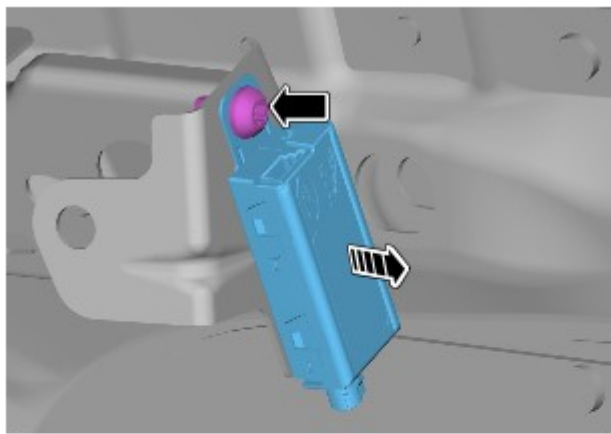

E258461

- Remove the bolt.
- Release the clip from the bracket.
- Remove the DAB3 antenna.

INSTALLATION

1.

NOTE:

Make sure that the component is correctly located.

- Install the clip.
- Install the DAB3 antenna.
- Install and tighten the bolt.

Torque: 3Nm

- Connect the 2 electrical connectors to the DAB3 antenna.

2.

Install the left loadspace trim panel.

Refer to: [Left Loadspace Trim Panel - 110, Vehicles With: 5 Seats](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

Refer to: [Left Loadspace Trim Panel - \[+\] 7 Seat Configuration, 110](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

3.

Connect the startup battery ground cable.

Refer to: [Startup Battery Disconnect and Connect](#) (414-00 Battery and Charging System - General Information, General Procedures).