

PUBLISHED: 04-DEC-2019
2020.0 DEFENDER (LE), 501-03

BODY CLOSURES

FUEL FLAP ASSEMBLY (G2422800)

mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- Protect the surrounding paintwork and body.

1. Fuel system health and safety precautions.

Refer to: [Petrol and Petrol-Ethanol Fuel Systems Health and Safety Precautions](#) (100-00 General Information, Description and Operation).

Refer to: [Diesel Fuel System Health and Safety Precautions](#) (100-00 General Information, Description and Operation).

2. Raise and support the vehicle on a suitable 2-post lift.

Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

3. Remove the rear right wheel arch liner.

Refer to: [Rear Wheel Arch Liner](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

- 4.



Open the fuel flap.

5.



Release the fuel filler cap.

6.


 **NOTE:**

If equipped.




Release the Diesel Exhaust Fluid (DEF) fuel filler cap.

7.

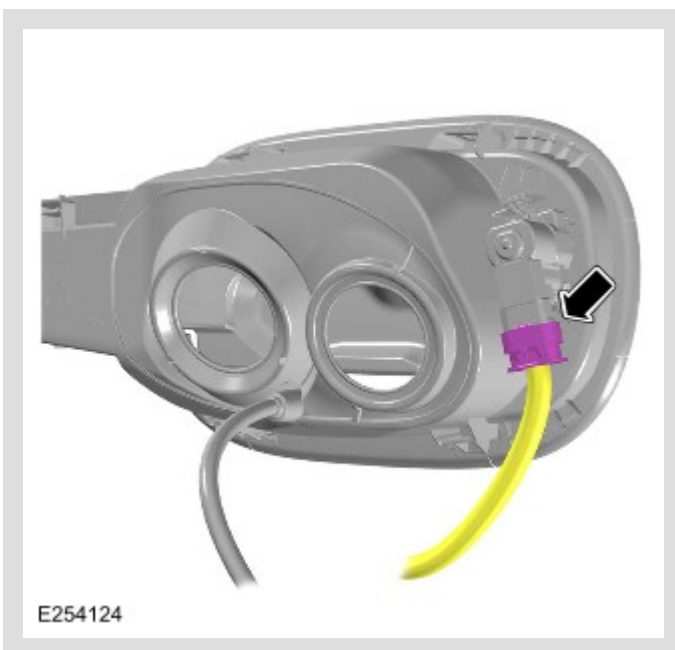

Disconnect the electrical connector.

8.

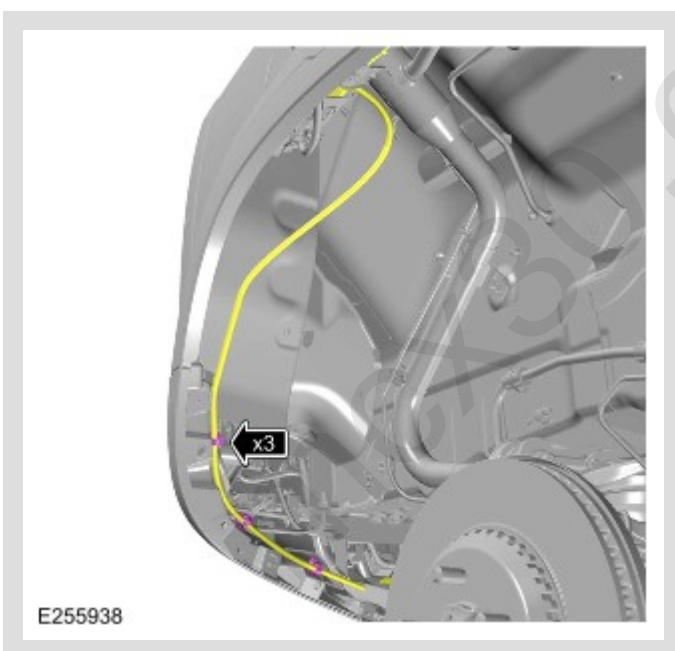


Release the breather hose from the 3 clips.

9.

CAUTION:

Make sure that the fuel flap is open.

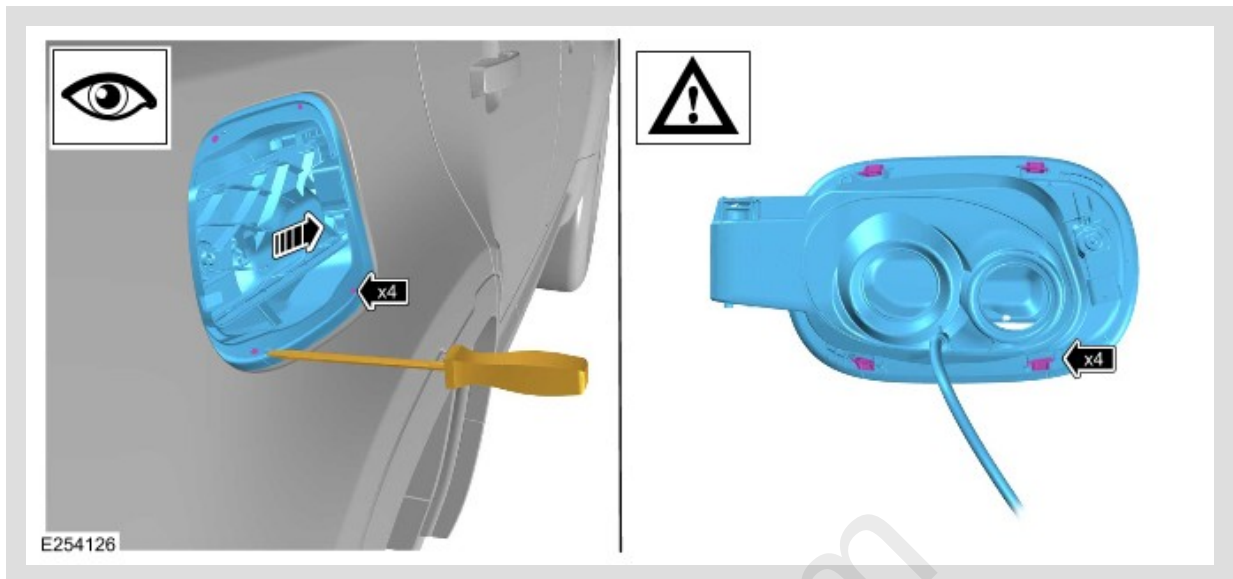


- Release the 4 clips.
- Remove the fuel flap assembly.

10.

NOTE:

Do not disassemble further if the component is removed for access only.

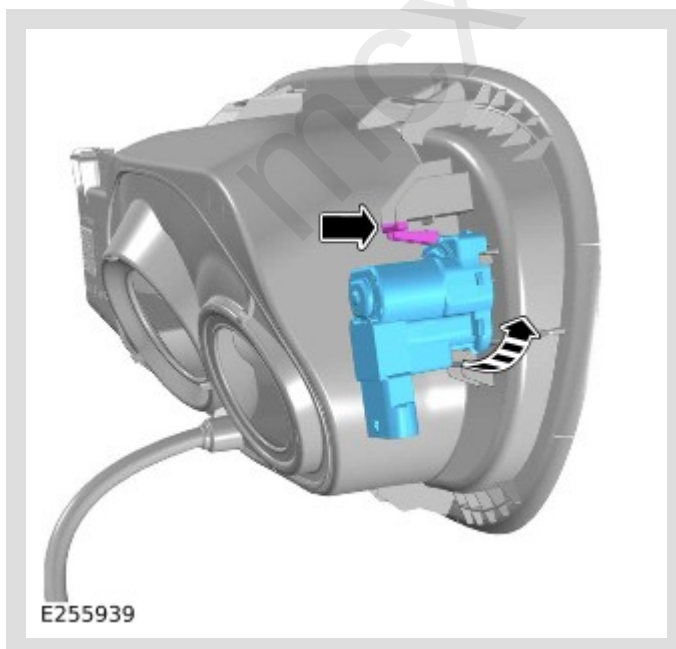

- Release the clip.
- Remove the latch.

INSTALLATION

1.

 CAUTION:

Make sure that all the clips are correctly installed.

Install the latch to the fuel flap assembly.

2.

 CAUTION:

Make sure that all the clips are correctly installed.

- Connect the electrical connector to the fuel flap assembly.
- Install the fuel flap assembly.

3.

Secure the breather hose to the 3 clips.

4.

 NOTE:

If equipped.

Install the DEF fuel filler cap.

5.

Install the fuel filler cap.

6.

Install the rear right wheel arch liner.

Refer to: [Rear Wheel Arch Liner](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).