

PUBLISHED: 14-APR-2020
2020.0 DEFENDER (LE), 501-05

INTERIOR TRIM AND ORNAMENTATION

C-PILLAR UPPER TRIM PANEL - 110 (G2412909)

mcx30.com

REMOVAL


⚠ CAUTION:

Make sure that excessive force is not used. Failure to follow this instruction may result in damage to the vehicle.

△ NOTE:


- This procedure contains illustrations for right side components, left side components are similar.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

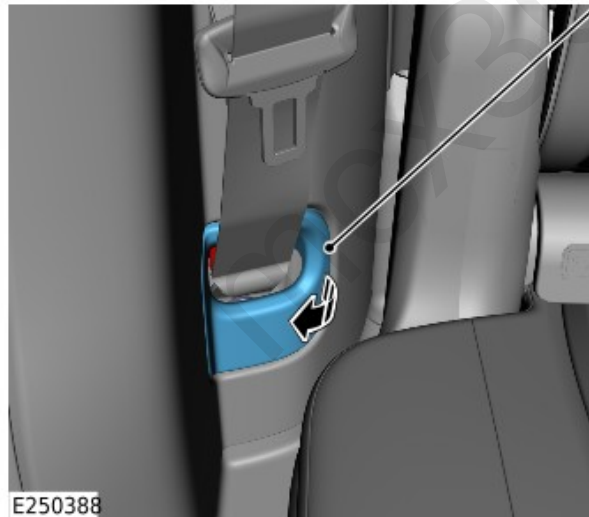

- Release the 2 clips.
- Remove the second row seatbelt anchor cover.

2.

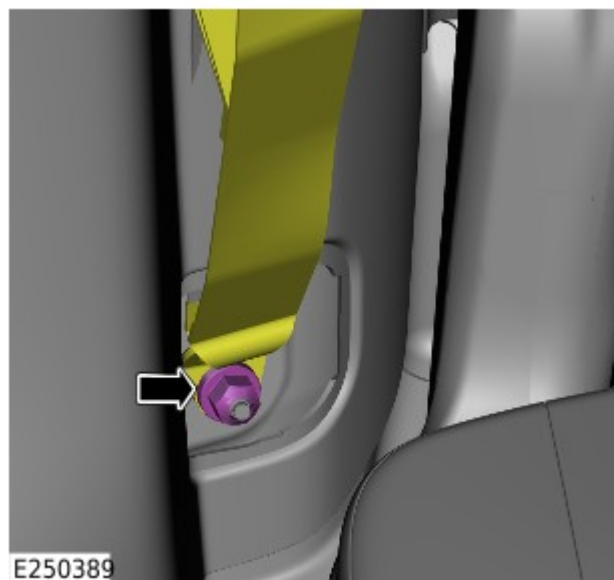

Remove the second row seatbelt anchor nut.

3.




Move the second row seat to the fold position.

4.



- Remove the trim.
- Release the clip.

5.

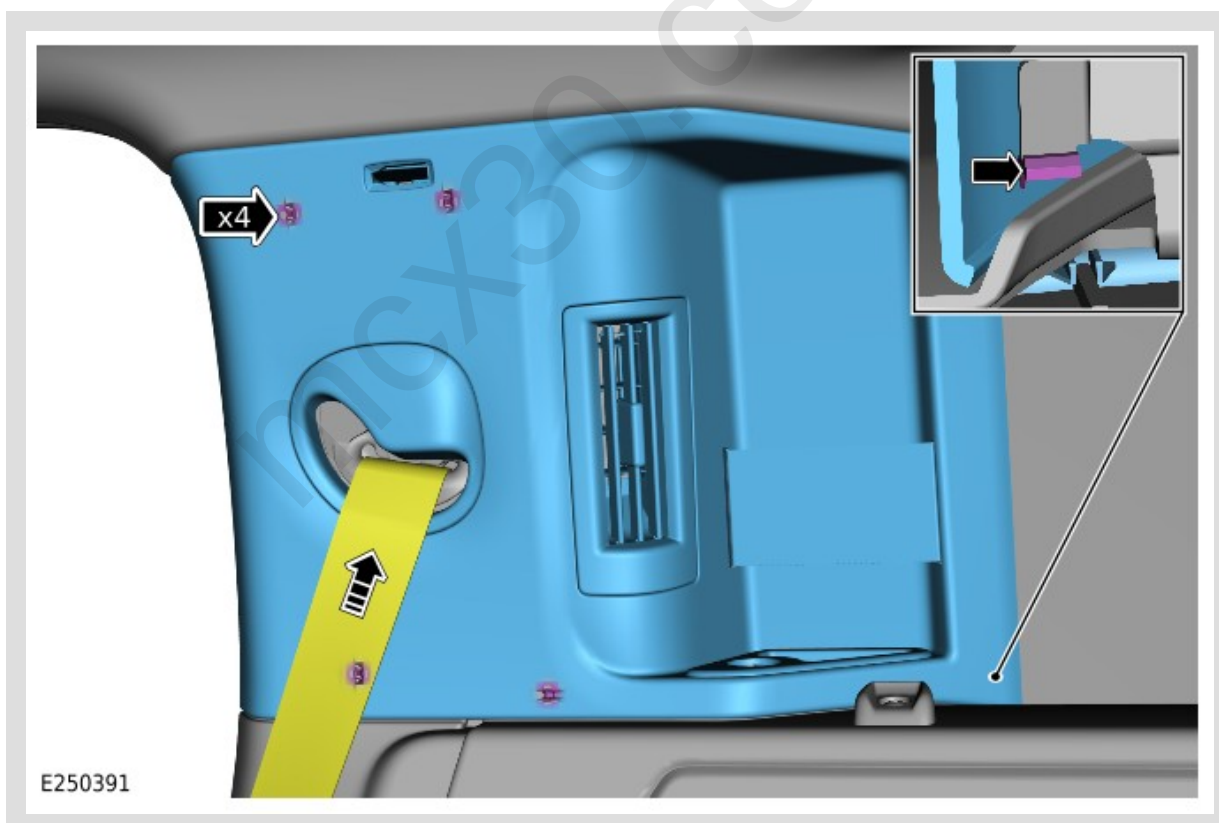

- Release the 5 clips.
- Remove the C-pillar upper trim panel.
- Release the seatbelt from the trim.

INSTALLATION

1.



NOTE:

Make sure that the trim is correctly installed to the clips.

- Reposition the seatbelt through into the C-pillar trim panel.
- Install the C-pillar trim panel.
- Install the 5 clips.
- Install the trim.

2.

Move the second row seat to its original position.

3.

Install and tighten the second row side seatbelt anchor nut.

Torque: 40Nm

4.

Install the second row seatbelt anchor cover.