

PUBLISHED: 06-AUG-2019  
2020.0 DEFENDER (LE), 501-16

WIPERS AND WASHERS

## WINDSHIELD WASHER PUMP (G2344865)

mcx30.com

REMOVAL

 **NOTES:**


- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Raise and support the vehicle on a suitable 2-post lift.  
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

2. Remove the front right wheel arch liner.  
Refer to: [Front Wheel Arch Liner](#) (501-02 Front End Body Panels, Removal and Installation).

 **NOTE:**

Be prepared to collect escaping fluids.

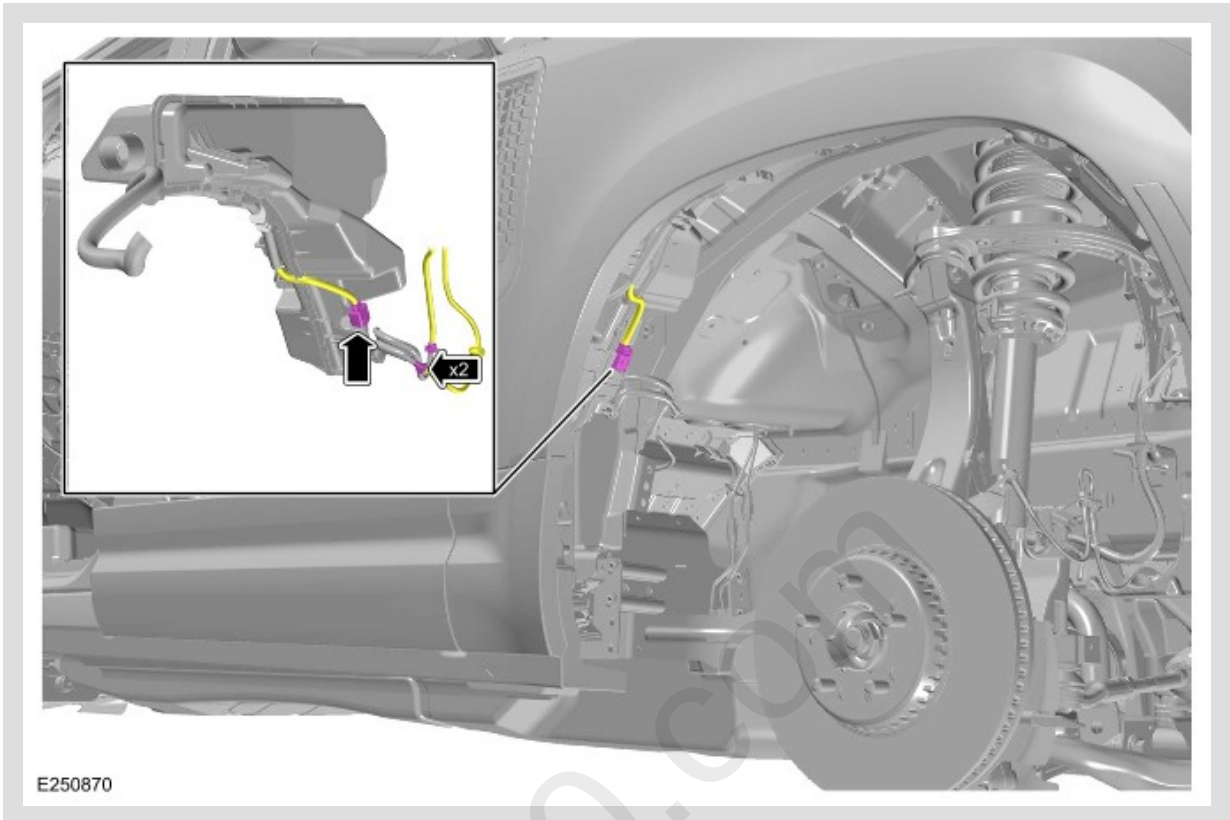


- Disconnect the electrical connector from the windshield washer pump.
- Disconnect the 2 windshield washer jet hoses from the windshield washer pump.

4.

**NOTE:**

Be prepared to collect escaping fluids.

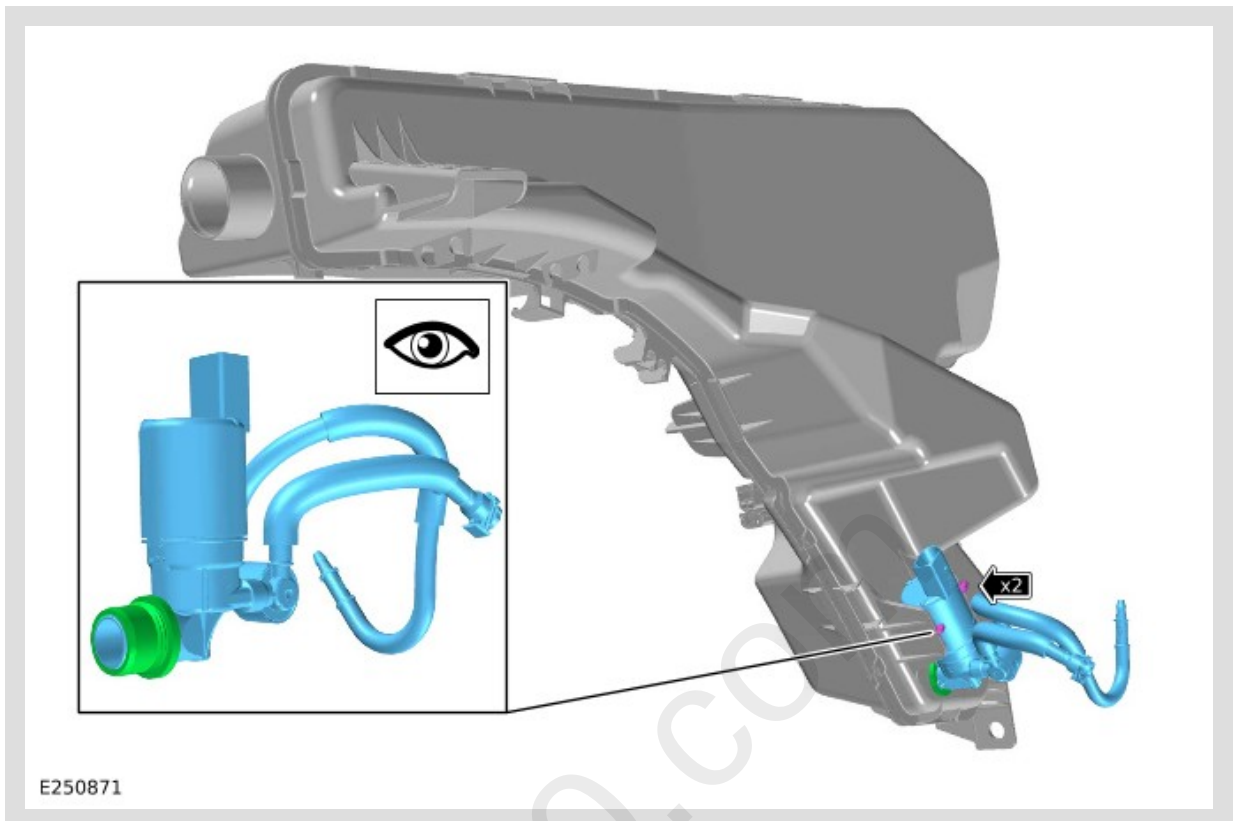

- Release windshield washer pump from the 2 clips.
- Remove the windshield washer pump from the windshield washer fluid reservoir.

## INSTALLATION

1.

**CAUTION:**

The seal is to be reused unless damaged.

- Install the windshield washer pump into the windshield washer fluid reservoir.
- Connect the electrical connector to the windshield washer pump.
- Connect the 2 windshield washer jet hoses to the windshield washer pump.

2.

Install the front right wheel arch liner.

Refer to: [Front Wheel Arch Liner](#) (501-02 Front End Body Panels, Removal and Installation).