

Disadvantages:



paper must be cut to size,



does not hold the paper during sanding,



extraction not possible.



Operator protection:



obligatory respiratory protection.



Protection in the work area:



None




Repair-00x04x03x16-01x79-1-1-1.xml



TOOLS FOR SCRAPING RIGID ADHESIVES AND PAINT: USE

1. FLAT STRIPPING

USE OF A PLASTIC FIBRE DISC, ON AN ANGLE GRINDER (5,000 RPM) FITTED WITH SPEED CONTROL

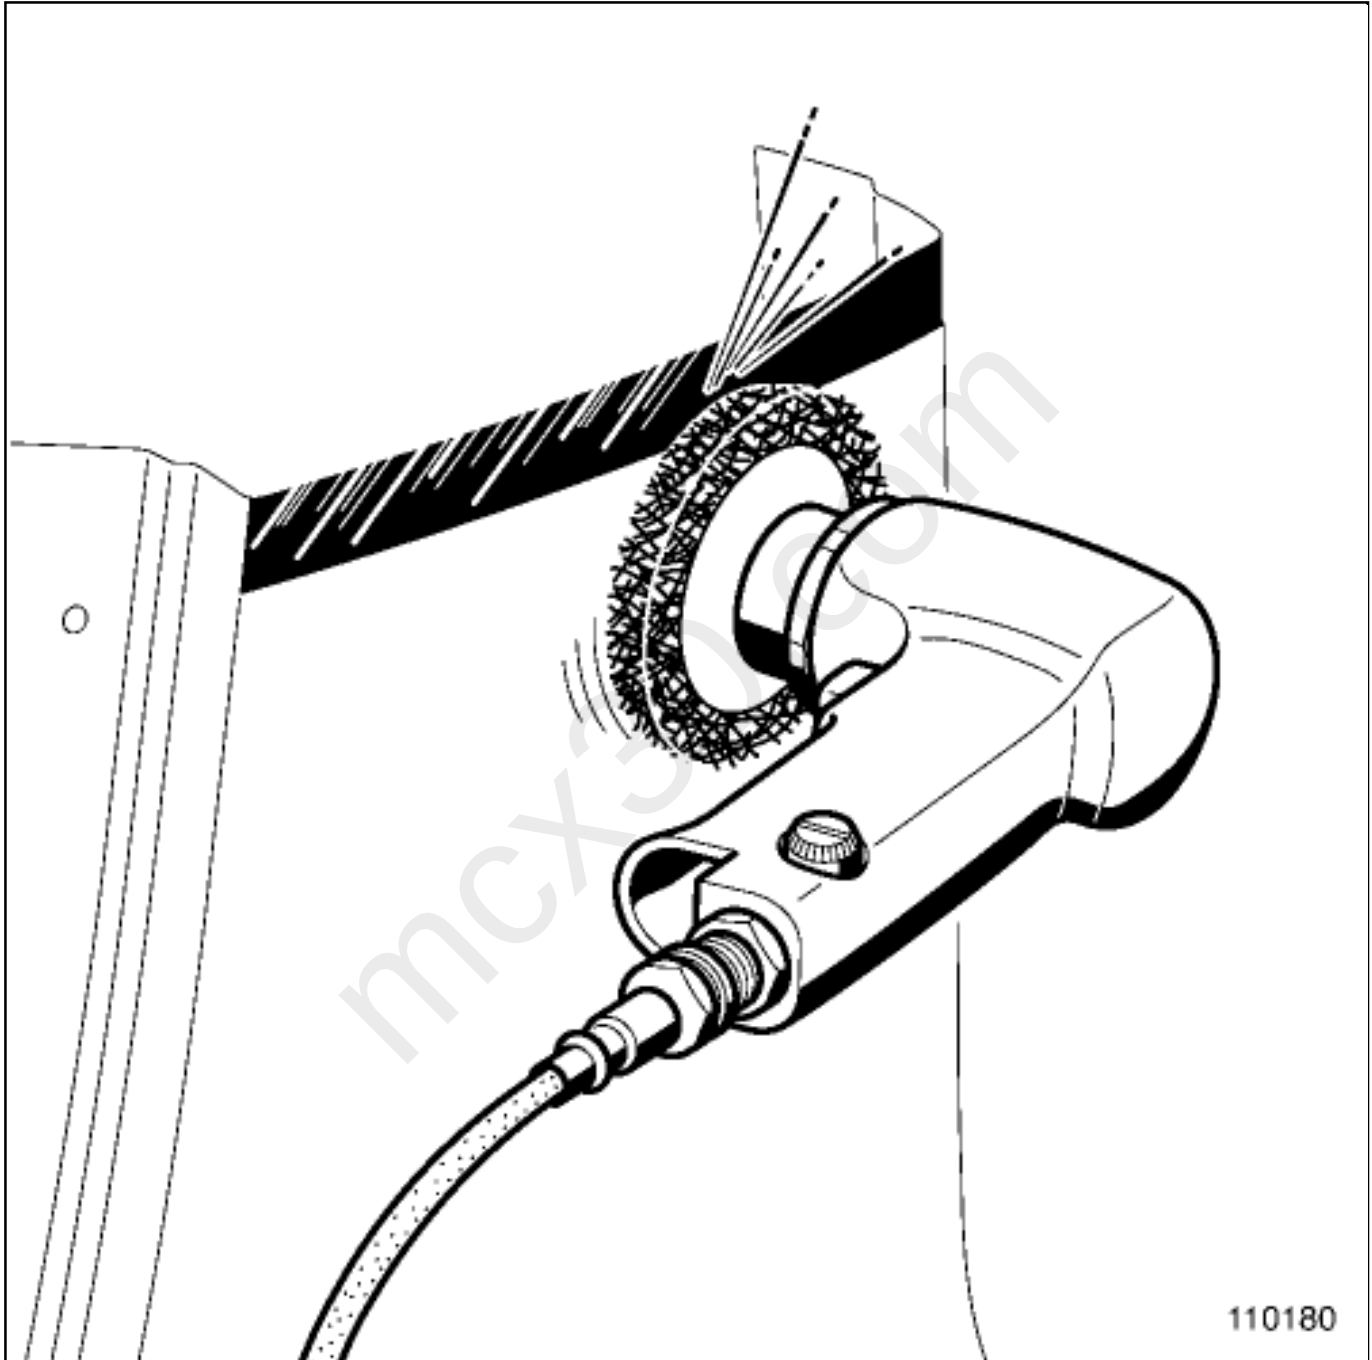

Advantage:

- Rapid means for cleaning a large painted surface with rigid adhesive mastic without damaging the support sheet and the galvanising.



Note:

When used on the edge of a sheet, the plastic fibre disc must be positioned parallel to the cut and should be applied from the centre of the part to the edge of the cut.

Disadvantage:

- Causes a large quantity of dust.

Operator protection:

- obligatory eye protection,
- obligatory respiratory protection,
- obligatory hand protection.




Protection in the work area:

- protection of interior fittings.

2. ANGLE STRIPPING

USE OF A PLASTIC FIBRE DISK ON A POWER DRILL (5,000 RPM)

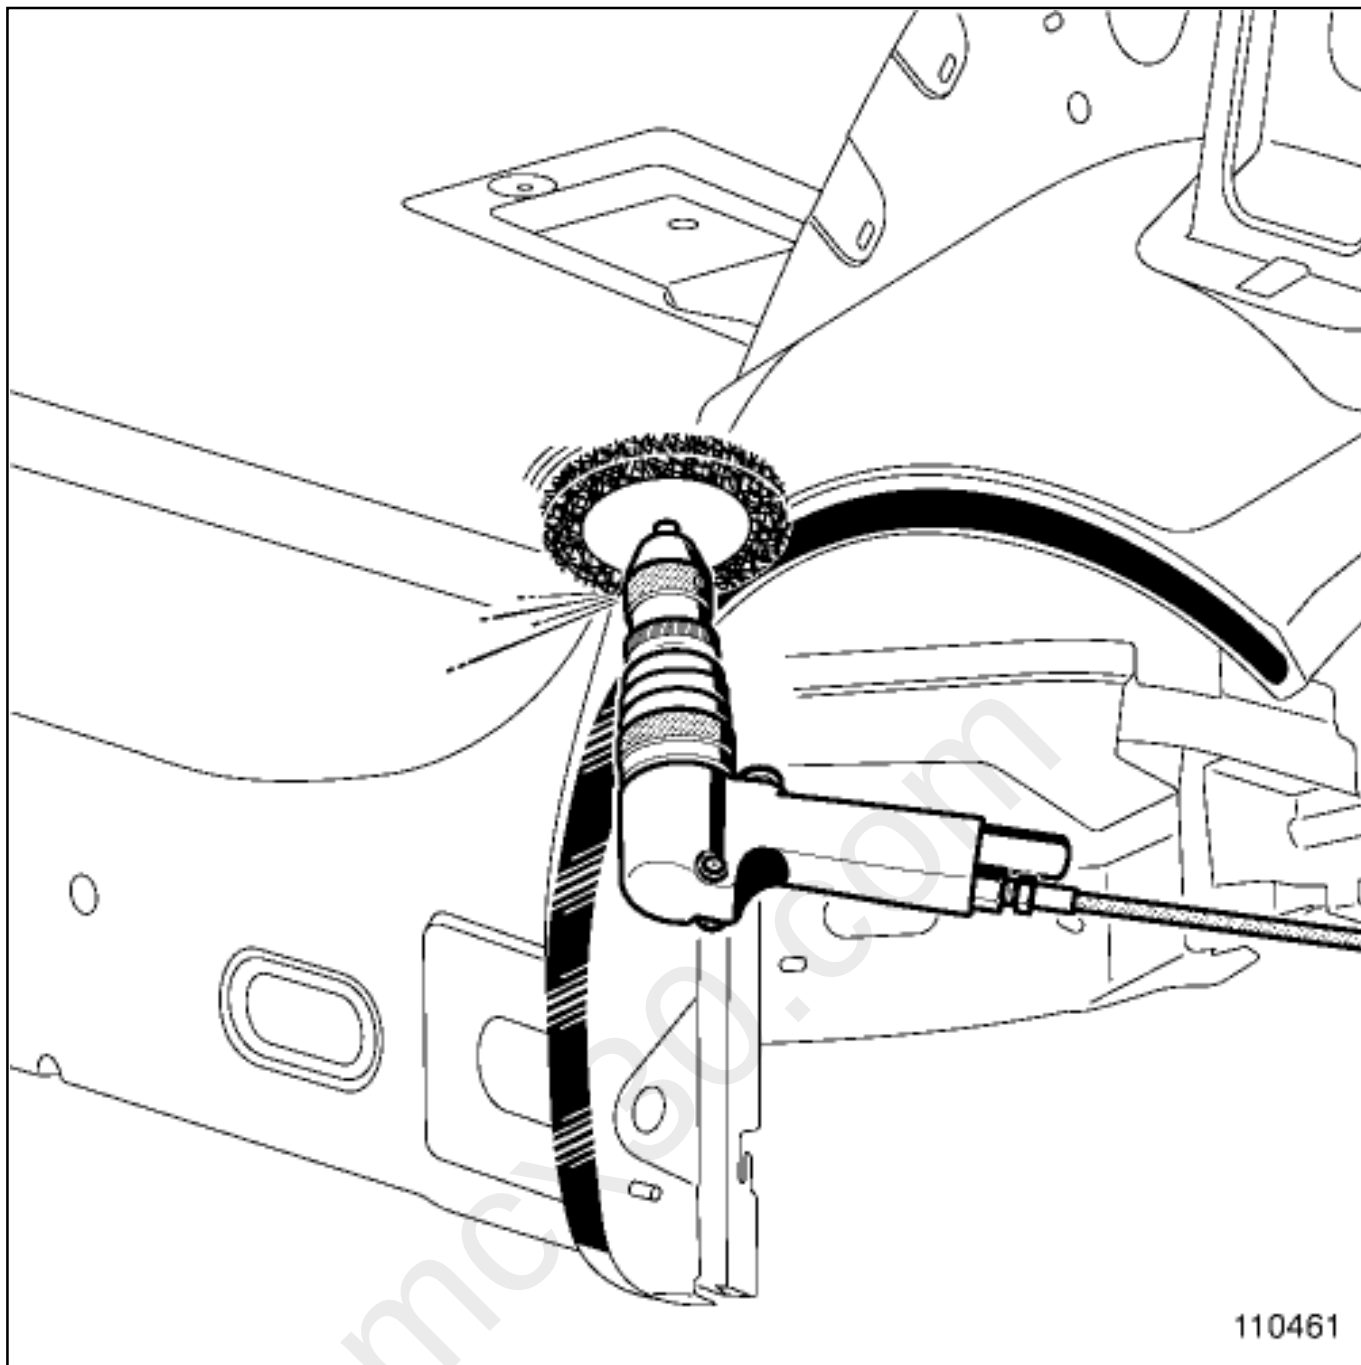

Advantage:

- allows cleaning into corners without damaging the support sheet and galvanising.

Disadvantage:

- Causes dust.

Operator protection:



obligatory eye protection,



obligatory respiratory protection,

obligatory hand protection.




Protection in the work area:



protection of interior fittings.

3. CORNER STRIPPING

USE OF A STRIP SANDER WITH AN ABRASIVE STRIP (50 GRIT)

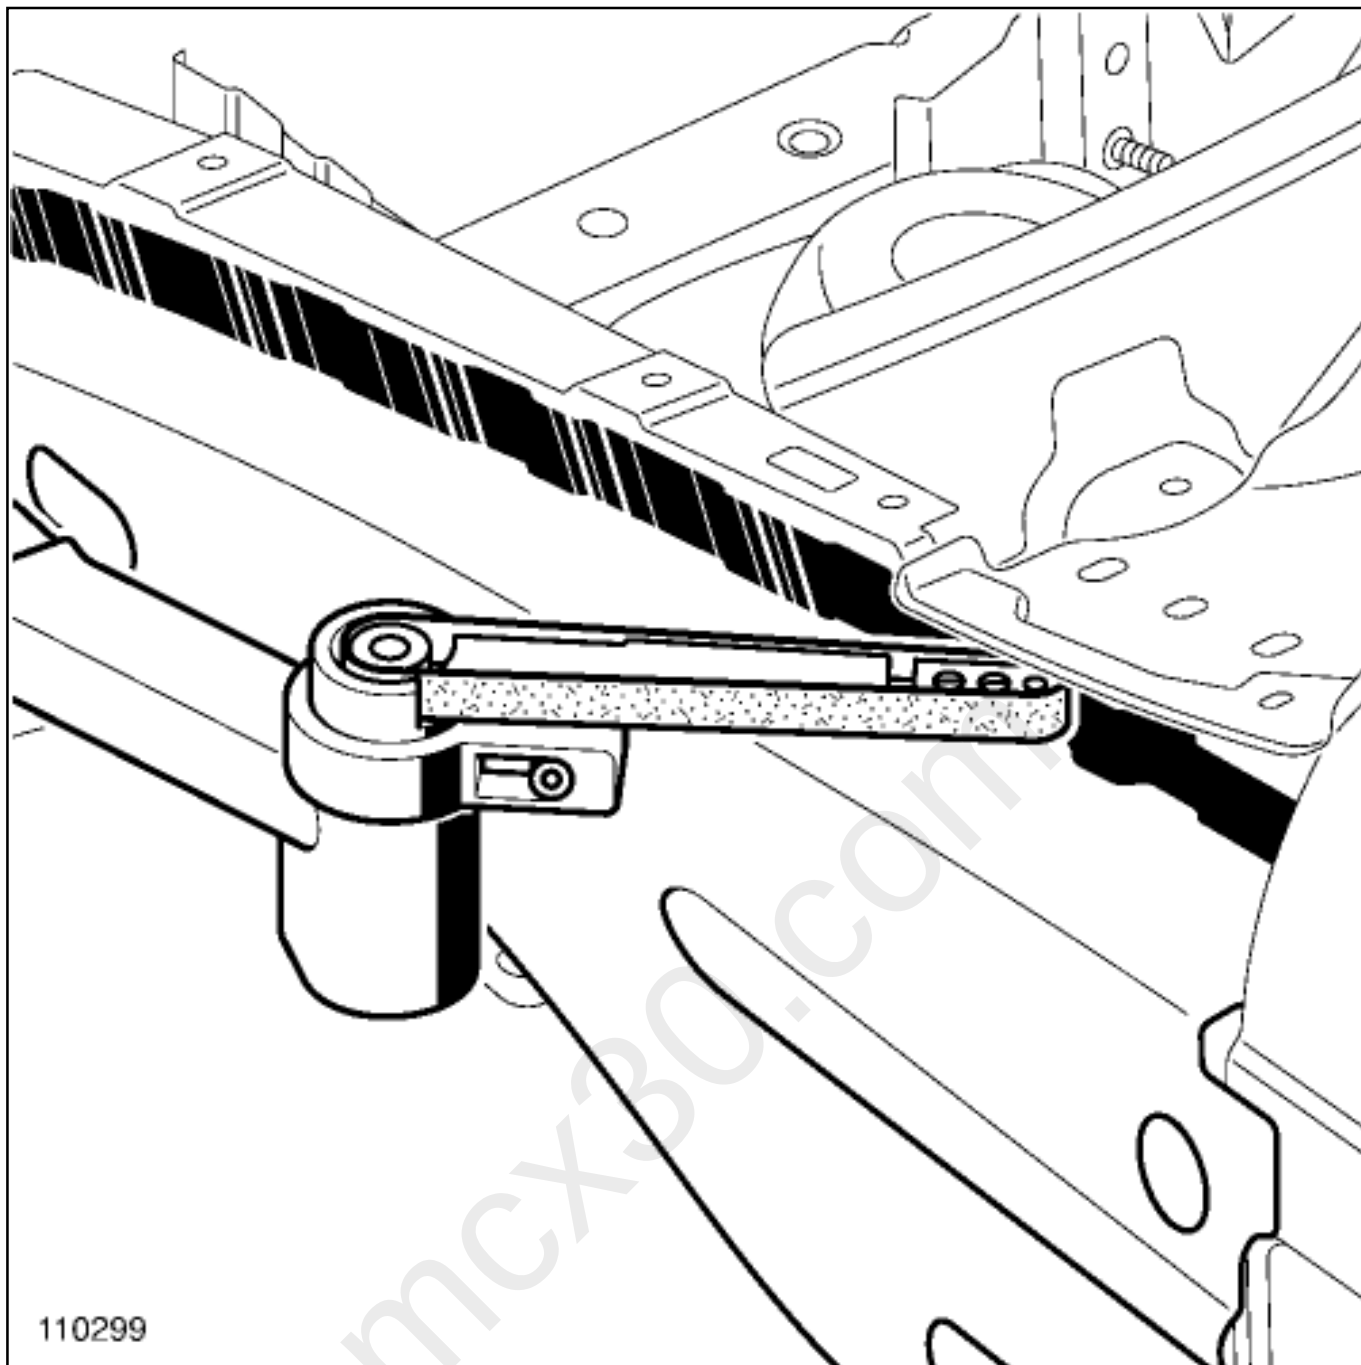

Advantage:

- Rapid means for stripping areas that are difficult to get to, corner or enclosed area stripping.

Disadvantages:

- Causes dust,

- Attacks the galvanising and the support sheet.