
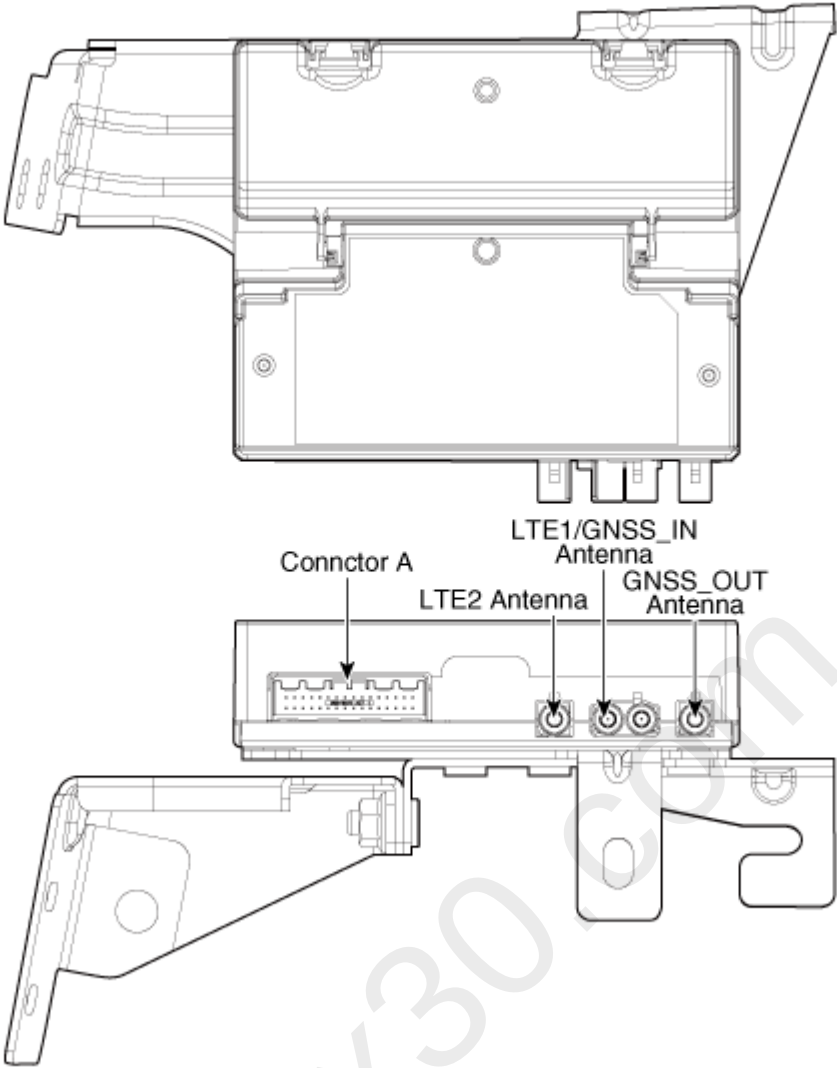
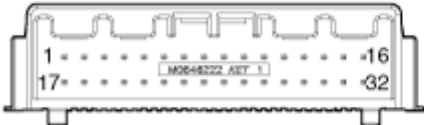



Component



Connector A	No	Description	No	Description
	1	B+	17	Airbag (PWM)
	2	MM CAN (High)	18	MM CAN (Low)
	3	HS CAN (High)	19	HS CAN (Low)
	4	-	20	-
	5	ACC	21	IGN 1
	6	Button GND	22	Button
	7	LED_GND	23	Button back light
	8	LED_RED	24	LED_GREEN
	9	MIC_Signal (+)	25	MIC_Signal (-)
	10	MIC_Ecall (+)	26	MIC_Ecall (-)
	11	MIC_GND	27	MIC_GND
	12	Ecall speaker (+)	28	Ecall speaker (-)
	13	-	29	-
	14	-	30	-
	15	-	31	-
	16	-	32	GND

LTE1/GNSS_IN Antenna	PIN	Description	PIN	Description
	1	Signal	2	GND

LTE2 Antenna	PIN	Description	PIN	Description
	1	Signal	2	GND

GNSS_OUT Antenna	PIN	Description	PIN	Description
	1	Signal	2	GND

NOTICE

The eCall unit for AVN is equipped in AVN head unit.

Rate this Document

☐ Document Type : SHOP

☐ Document Rating :

Please rate the above contents on a scale of 1 to 5.

Little Value 1 2 3 4 5 Excellent Value