

WHEELS AND TIRES [G2344321]

SPECIFICATIONS

Wheels

WHEEL TYPE	WHEEL NAME	WHEEL SIZE
Steel wheel	Steel	8.0J xR18 CH+41.5
Alloy wheel	Apollo	8.0J xR18 CH41.5
Alloy wheel	Mars	8.0J xR19 CH41.5
Alloy wheel	Newson	8.0J xR19 CH41.5
Aero Alloy wheel	Pegasus	8.5J xR20 CH41.5
Alloy wheel	Luna	8.5J xR20 CH41.5
Alloy wheel	Apollo	8.5J xR20 CH41.5

Tire Size



NOTES:

- The tire size is displayed on the outer wall of each tire.
- All Range Rover tires are rated as XL (Extra Load) or 'Reinforced'

TIRE	TIRE SIZE	LOAD INDEX	SPEED RATING
18"	255/70R18	116 XL	V
18"	255/70R18	116 XL	H
19"	255/65R19	114 XL	V
19"	255/65R19	114 XL	V
19"	255/65R19	114 XL	H
20"	255/60R20	113 XL	V
20"	255/60R20	113 XL	V
20"	255/60R20	113 XL	H
22"	275/45R22 (SVO)	112 XL	W

Tire Pressures

WHEEL	TIRE SIZE	LIGHT LOAD (3 UP OR LESS)		FULLY LADEN (>3 UP)	
		Front	Rear	Front	Rear
		bar (kPa)	bar (kPa)	bar (kPa)	bar (kPa)
8.0Jx18	255/70 R18 116 H	2.3 (230)	2.5 (250)	3.2 (320)	3.4 (340)
8.0Jx18	255/70 R18 116 V	2.3 (230)	2.5 (250)	3.2 (320)	3.4 (340)
8.0Jx19	255/65 R19 114 H	2.3 (230)	2.5 (250)	3.2 (320)	3.4 (340)
8.0Jx19	255/65 R19 114 V	2.5 (250)	2.5 (250)	3.2 (320)	3.4 (340)
8.5Jx20	255/60 R20 113 H	2.3 (230)	2.5 (250)	3.2 (320)	3.4 (340)
8.5Jx20	255/60 R20 113 V	2.3 (230)	2.5 (250)	3.2 (320)	3.4 (340)
8.5Jx22	275/45 R22 112 W	2.3 (230)	2.5 (250)	3 (300)	3.4 (340)


Torque Specifications



NOTE:

A- refer to the procedure for correct torque sequence.

COMPONENT LOCATION

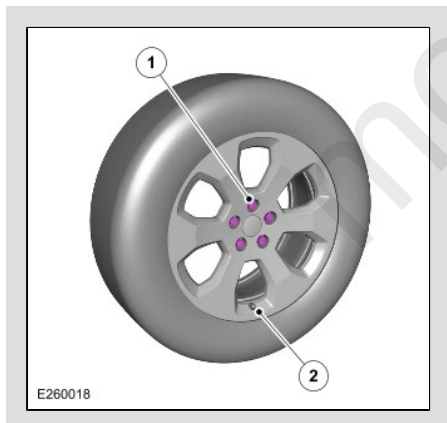

DESCRIPTION	NM	LB-FT	LB-IN
Road wheel nuts	A	A	-
Tire pressure sensor nut	8	-	71