

PUBLISHED: 19-NOV-2019
2020.0 DEFENDER (LE), 417-01

EXTERIOR LIGHTING

REAR FOG LAMP (G2323851)

mcx30.com

REMOVAL

 CAUTION:

Make sure to protect the paintwork.

 NOTE:


- This procedure contains illustrations for right side components, left side components are similar.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustration depending on the vehicle specification, but essential information is always correct.

1. Raise and support the vehicle on a suitable 2 post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

2. Remove the rear bumper for access.
Refer to: [Rear Bumper](#) (501-19 Bumpers, Removal and Installation).

⚠ CAUTION:

- Take extra care not to damage the wiring harnesses.
- Take extra care not to damage the edges of the component.

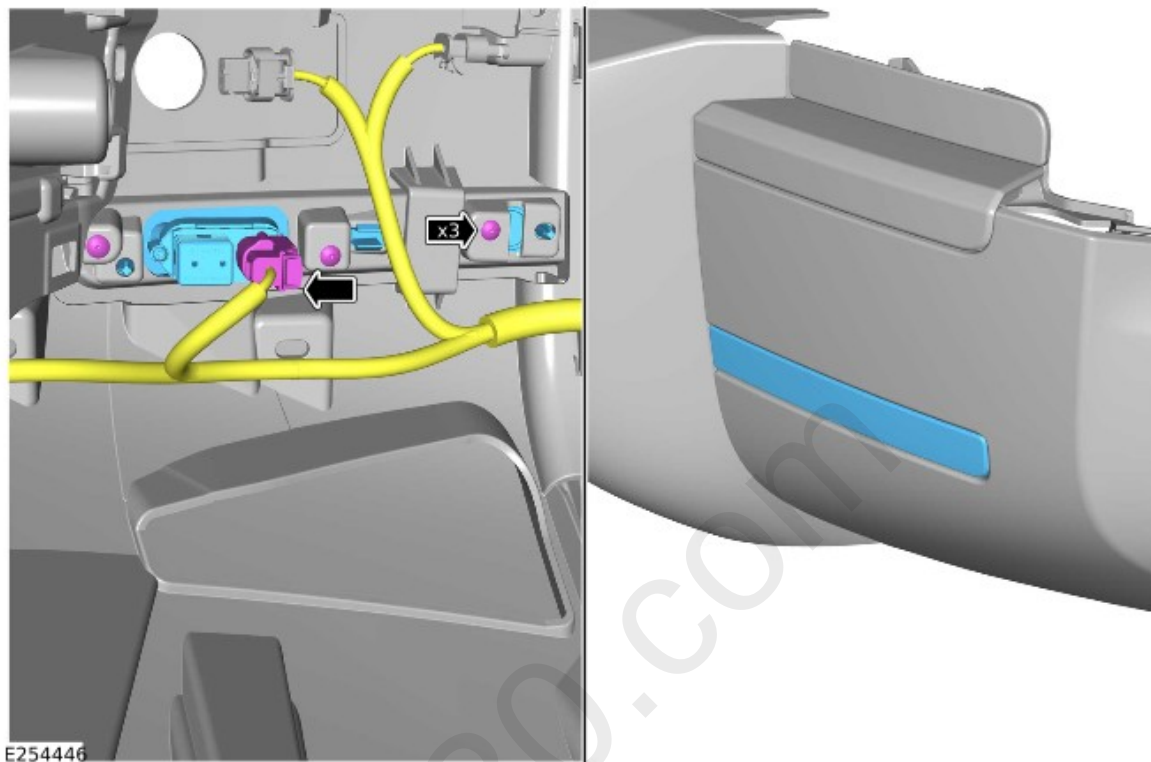

- Disconnect the electrical connector.
- Remove the 3 screws.
- Remove the rear fog lamp.

INSTALLATION

1.

⚠ CAUTION:

- Take extra care not to damage the wiring harnesses.
- Take extra care not to damage the edges of the component.

- Install the rear fog lamp.
- Install and tighten the 3 screws.
Torque: 1.5Nm
- Connect the electrical connector.

2.

Install the rear bumper.

Refer to: [Rear Bumper](#) (501-19 Bumpers, Removal and Installation).