

PUBLISHED: 07-SEP-2020
2020.0 DEFENDER (LE), 501-08

EXTERIOR TRIM AND ORNAMENTATION

CONTRAST ROOF FINISHER DECAL (G2724065)

mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.


1. Remove the rear quarter window.

Refer to: [Rear Quarter Window](#) (501-11 Glass, Frames and Mechanisms, Removal and Installation).

2. Remove the windshield moulding.

Refer to: [Windshield Moulding](#) (501-11 Glass, Frames and Mechanisms, Removal and Installation).


- 3.

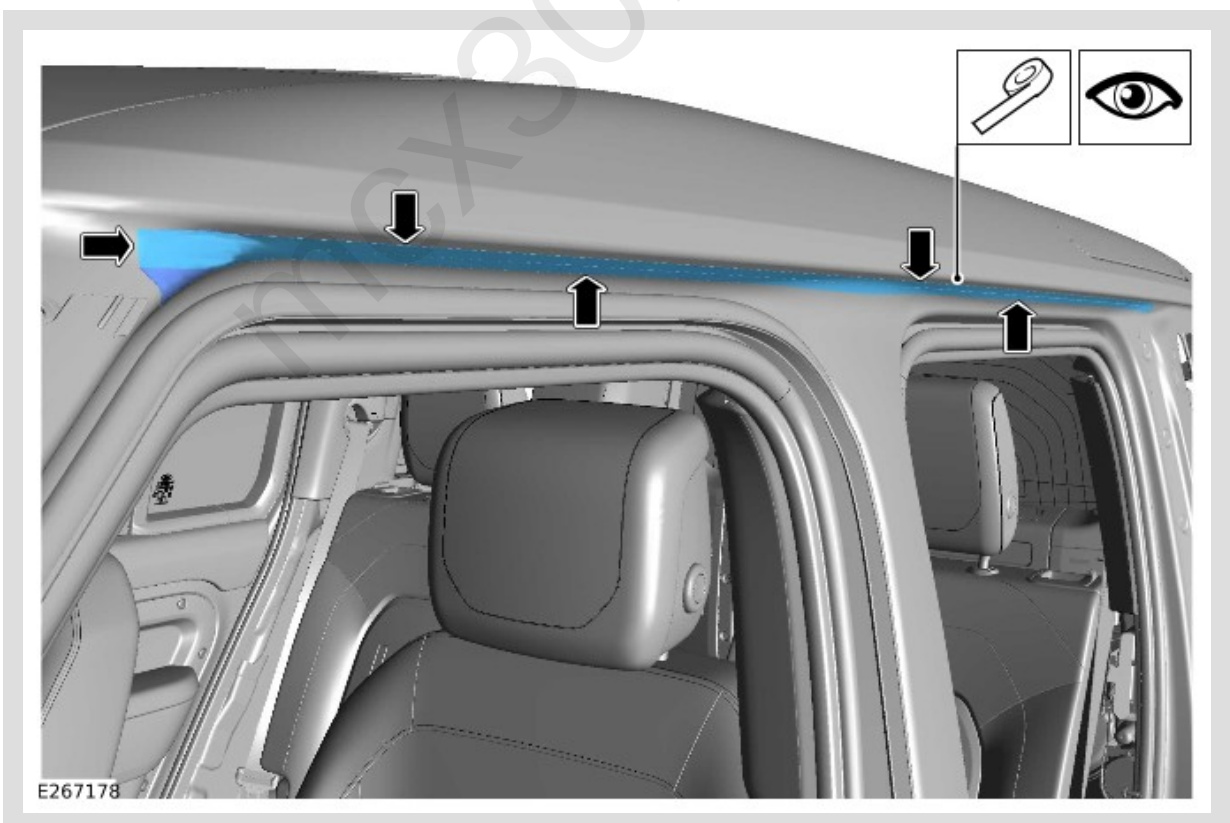

Inspect and note the installed position of the contrast roof finisher decal.

ⓘ CAUTIONS:

- Take extra care not to damage the front lower decal.
- Take extra care not to damage the surrounding paintwork.

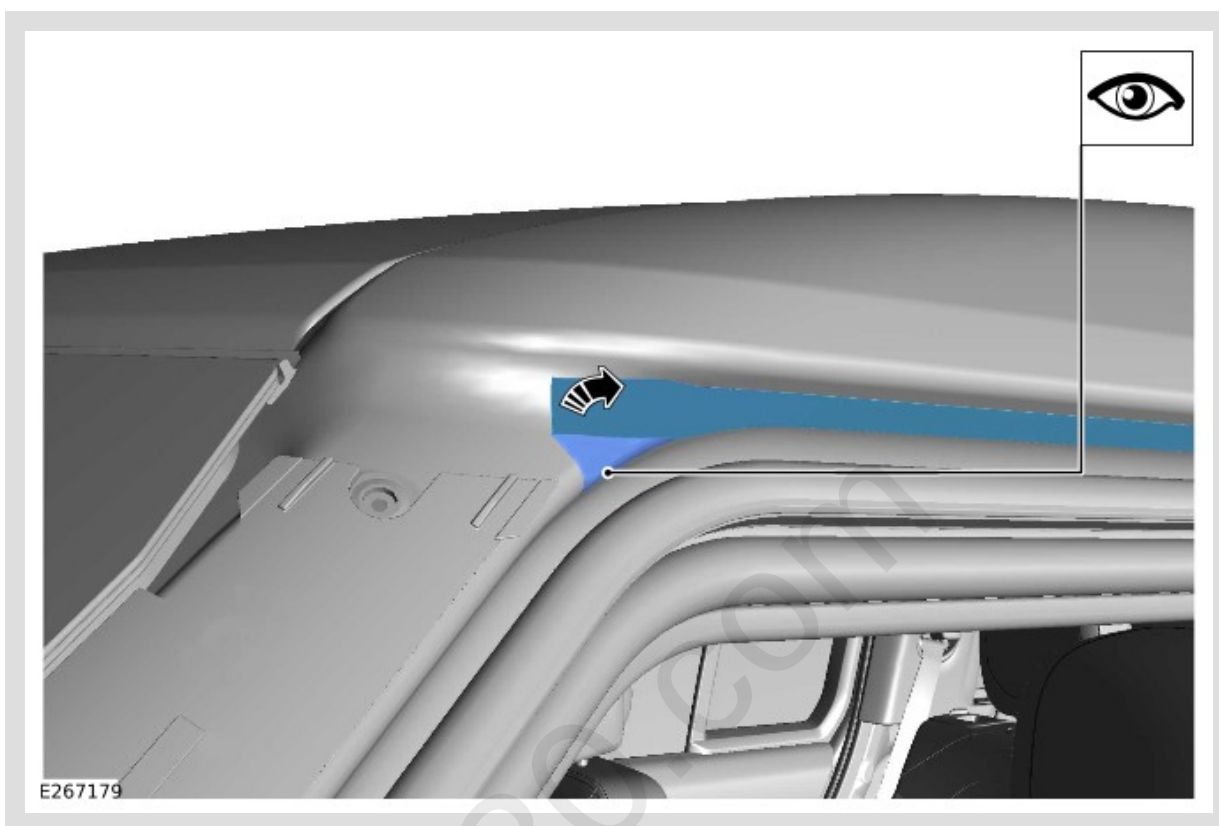

- Remove the contrast roof finisher decal.
- Inspect the front lower decal and replace if required.



Using a suitable cleaner, clean the illustrated surface. Make sure the area is clean and free from dirt or dust.

INSTALLATION



- Install the new contrast roof finisher decal to the position noted on removal.
- Make sure that a quarter of the contrast roof finisher decal is installed to the contrast roof.

2.

Refer to: [Windshield Moulding](#) (501-11 Glass, Frames and Mechanisms, Removal and Installation).

3.

Refer to: [Rear Quarter Window](#) (501-11 Glass, Frames and Mechanisms, Removal and Installation).