

PUBLISHED: 04-NOV-2019
2020.0 DEFENDER (LE), 501-14

HANDLES, LOCKS, LATCHES AND ENTRY SYSTEMS

EMERGENCY KEY BARREL (G2443864)

mcx30.com

REMOVAL


⚠ CAUTION:

Protect the surrounding paintwork to avoid damage.

△ NOTES:


- This procedure contains illustrations for right hand drive vehicles, left hand drive vehicles are similar.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.

1.

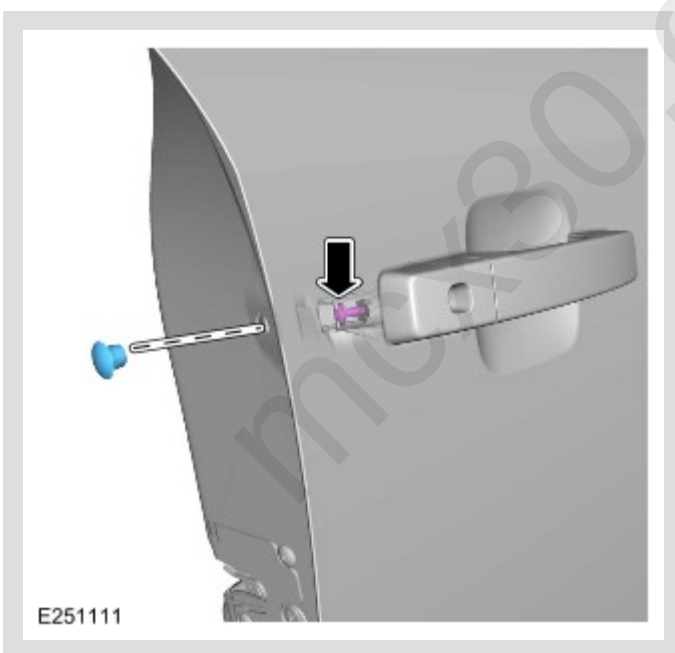

- Open the driver door.
- Remove the access plug.
- Loosen the screw, but do not fully remove.

2.

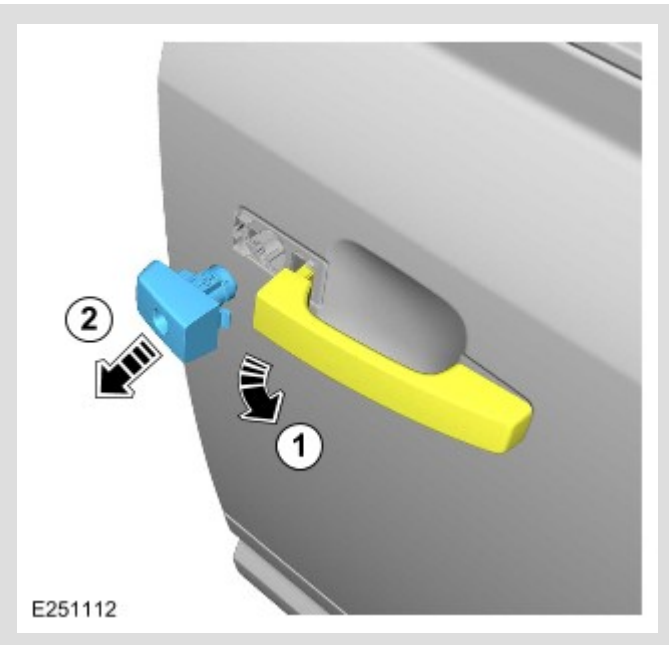


- Pull the driver door exterior handle.
- Remove the emergency key barrel.

3.

 NOTE:

Do not disassemble further if the component is removed for access only.

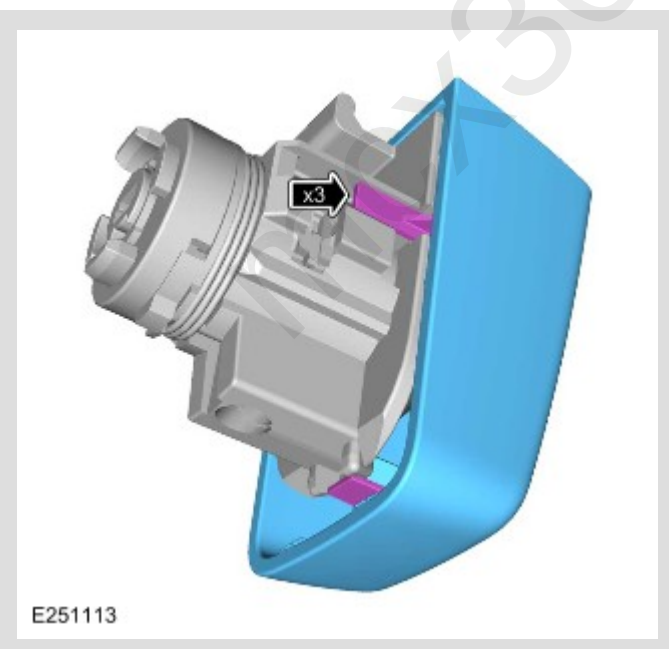

- Release the 3 clips.
- Remove the emergency key barrel cover.

INSTALLATION

1. Install the front emergency key barrel cover.

- 2.
- Pull the driver door exterior handle.
 - Install the emergency key barrel.

- 3.
- Tighten the screw.
 - Install the access plug.
 - Close the driver door.

cmjaGFyZG1vbnRvbjsyMDIwLTA5LTE4VDEzOjEyOjAyLjIyM2N1OTIuNDAuMTg5LjUzOw==

mcx30.com