

PUBLISHED: 15-OCT-2019
2020.0 DEFENDER (LE), 501-16

WIPERS AND WASHERS

REAR WINDOW WIPER MOTOR (G2416339)

mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Remove the rear window wiper arm.

Refer to: [Rear Window Wiper Arm](#) (501-16 Wipers and Washers, Removal and Installation).


2. Remove the tailgate trim panel.

Refer to: [Tailgate Trim Panel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

- 3.


 NOTE:

Be prepared to collect the escaping fluid.

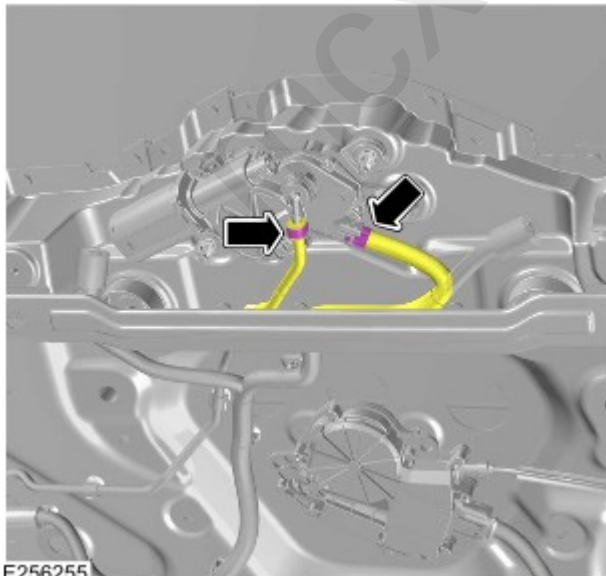

- Disconnect the rear window washer jet hose from the rear window wiper motor.
- Disconnect the electrical connector from the rear window wiper motor.

4.

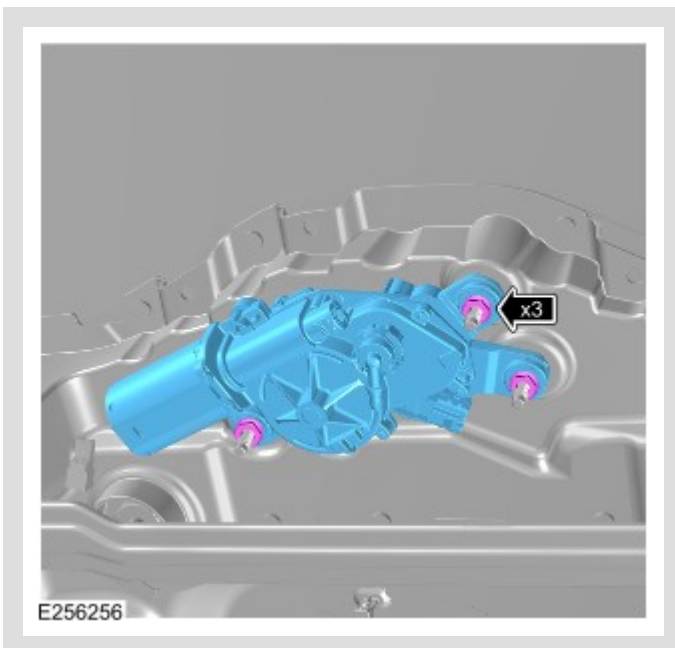

- Remove the 3 nuts.
- Remove the rear window wiper motor.

INSTALLATION

1.

- Install the rear window wiper motor.
- Install and tighten the 3 nuts.

Torque: 8Nm

2.

- Connect the electrical connector to the rear window wiper motor.
- Connect the rear washer hose to the rear window wiper motor.

3.

Install the tailgate trim panel.

Refer to: [Tailgate Trim Panel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

4.

Install the rear window wiper arm.

Refer to: [Rear Window Wiper Arm](#) (501-16 Wipers and Washers, Removal and Installation).