

PUBLISHED: 08-SEP-2020
2020.0 DEFENDER (LE), 501-17

ROOF OPENING PANEL

CANVAS ROOF SIDE FINISHER (G2684050)

mcx30.com

REMOVAL


**WARNING:**

Make sure the ignition is OFF before carrying out this procedure.


**NOTES:**

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1.

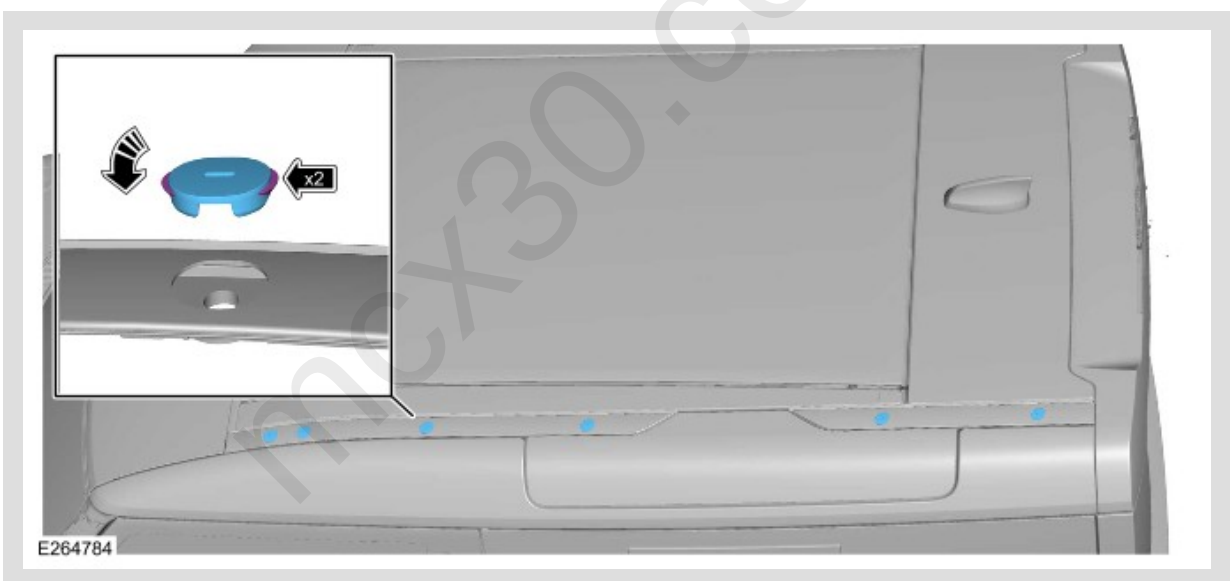

Remove the 6 roof moulding bolt covers.

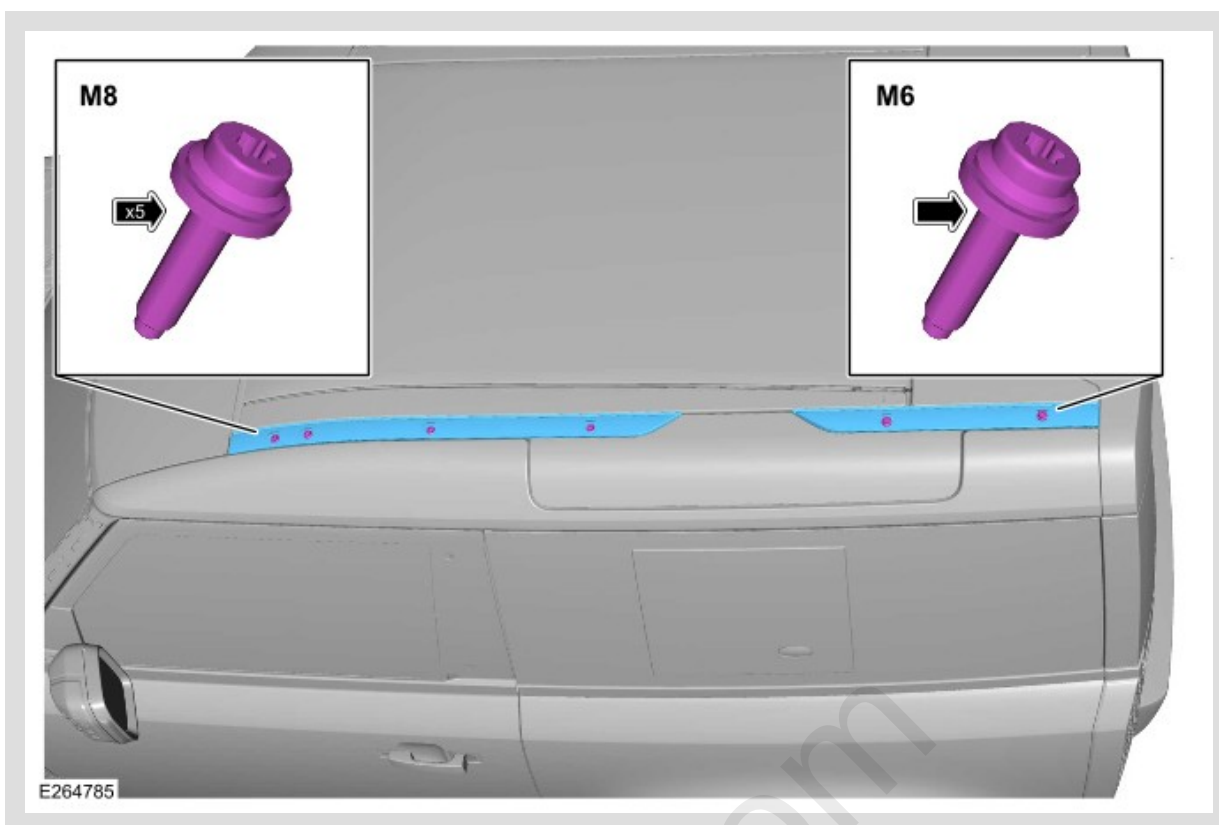


- Remove the 5 M8 bolts and the M6 bolt.
- Remove the 2 roof mouldings.

3.

⚠ CAUTIONS:

- If any clips are damaged, replace as necessary.
- Take extra care not to damage the component.

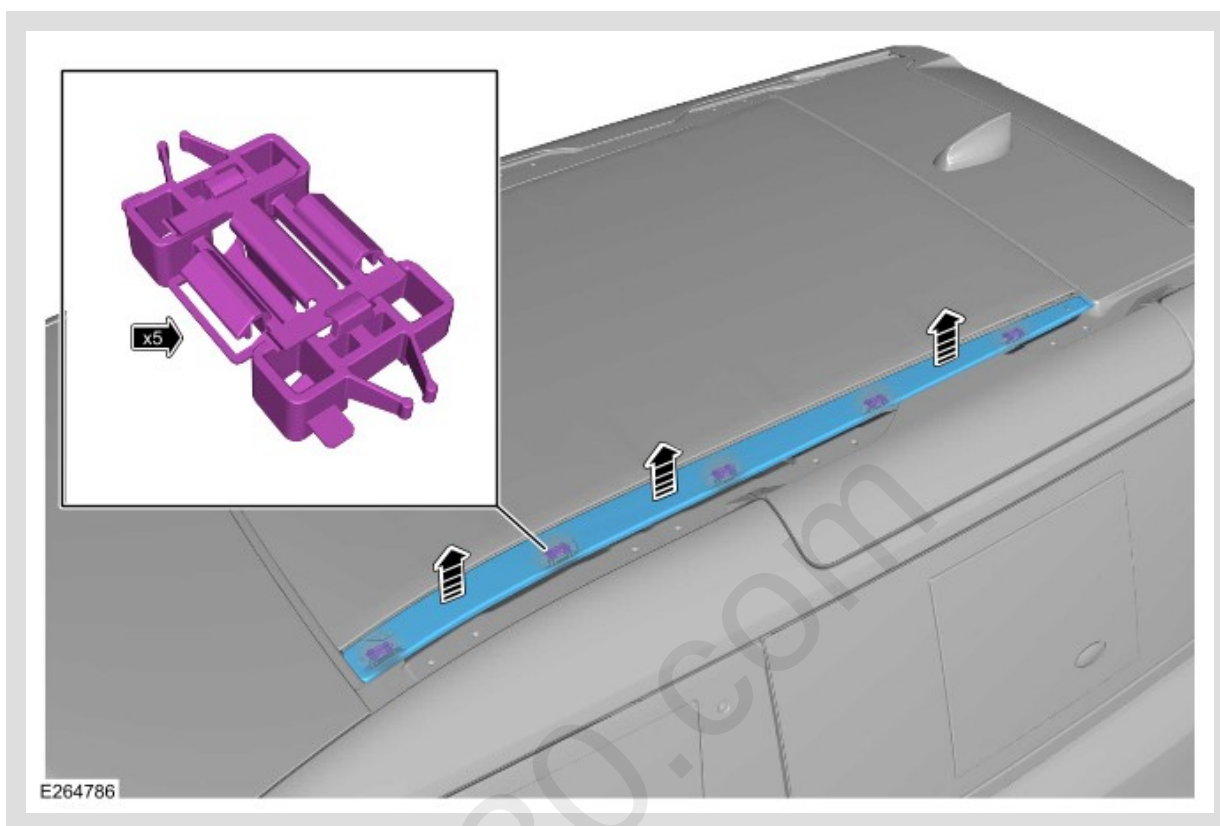

Remove the canvas roof side finisher at the 5 clips.

INSTALLATION

1.

⚠ CAUTION:

Take extra care not to damage the component.

Install the canvas roof side finisher at the 5 clips.

2.

- Install the 2 roof mouldings.
- Install and tighten the 5 M8 bolts.
Torque: 8Nm
- Install and tighten the M6 bolt.
Torque: 8Nm
- Install the 6 roof moulding bolt covers.

mcx30.com