


2022 CHEVROLET CORVETTE SERVICE MANUAL

- SEARCH


1. Power and Signal Distribution
2. Wiring Systems and Power Management
3. Repair Instructions
- 4.

Body Wiring Harness Junction Block Replacement

Removal Procedure

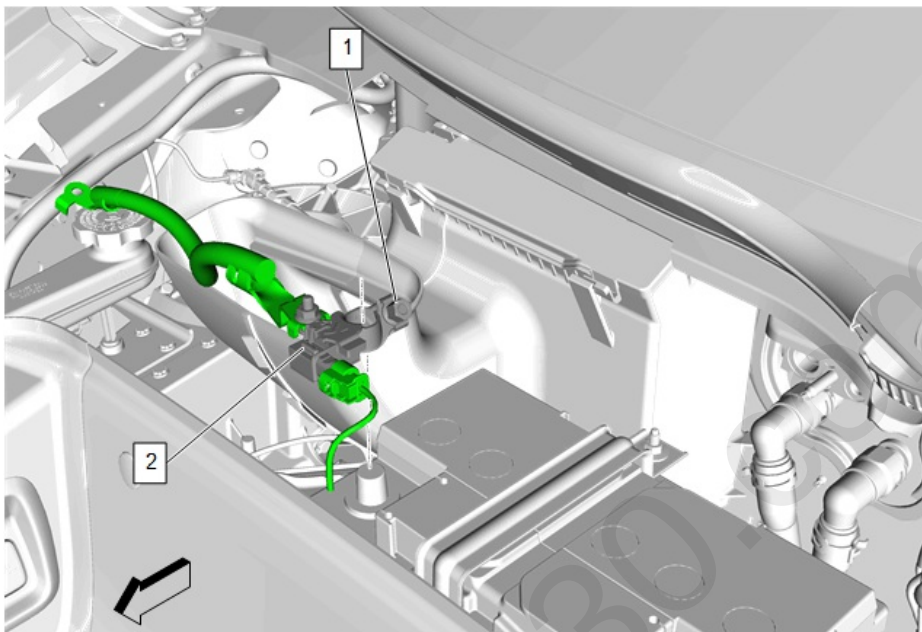


1. [Click here for full size](#)
2. Disconnect the negative battery cable (2). Battery Negative Cable Disconnection and Connection

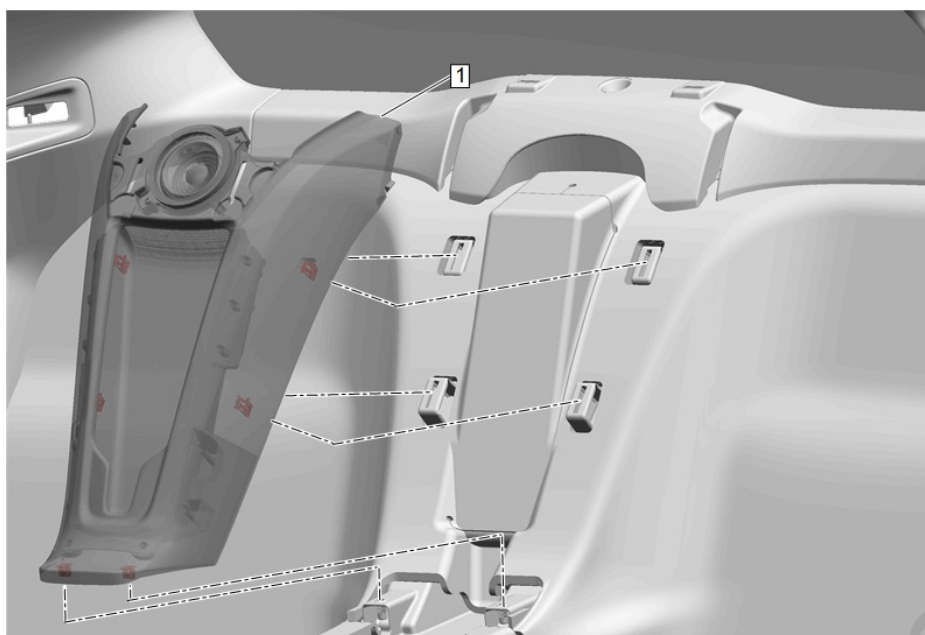


3.
[Click here for full size](#)

4. Rear Compartment Closeout Panel (1) >> Remove - Rear Compartment Closeout Panel Replacement

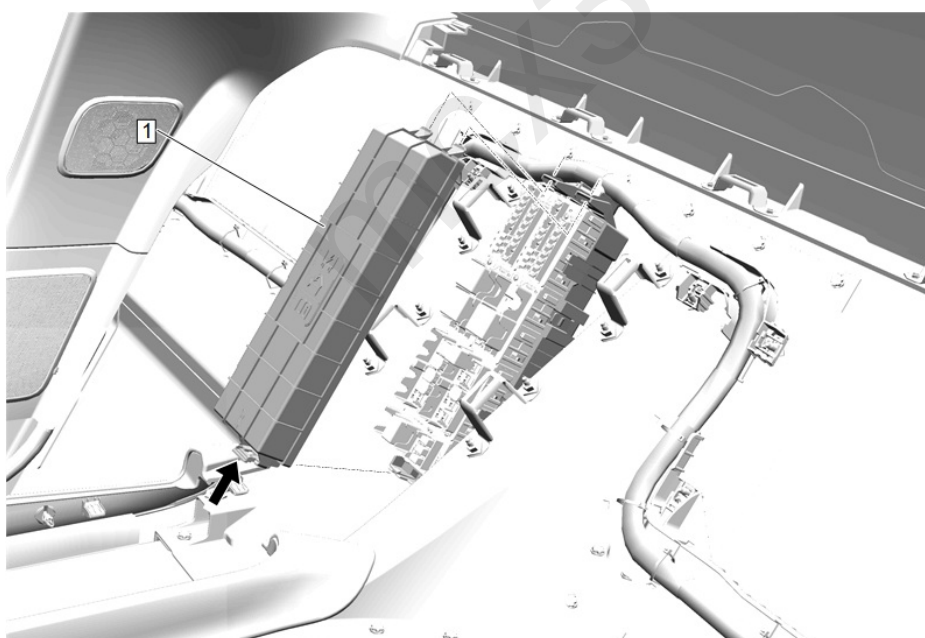


5.
[Click here for full size](#)

6. Body Wiring Harness Junction Block Cover (1) >> Remove

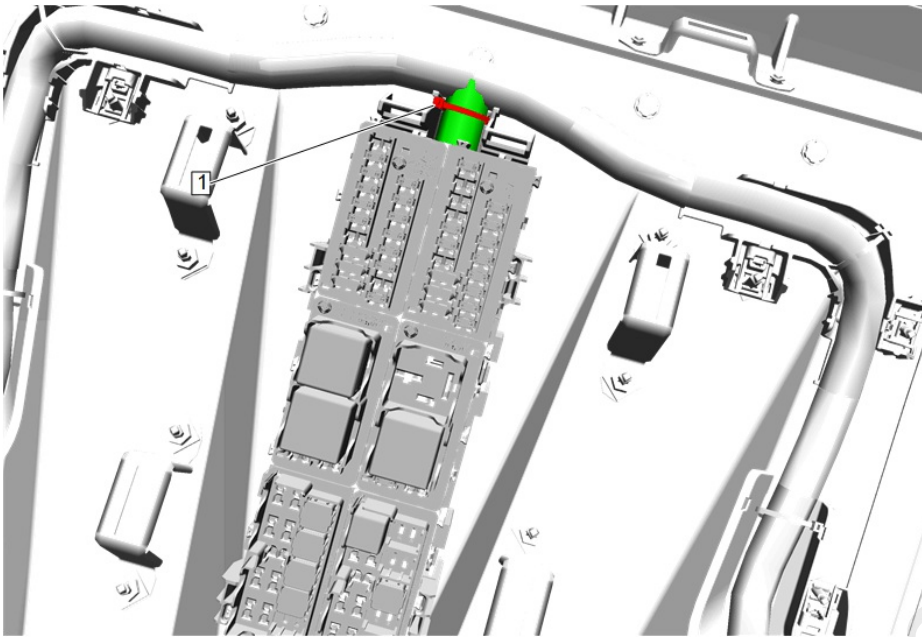


7. [Click here for full size](#)
8. Using the appropriate tool, cut the wiring harness tie strap (1).

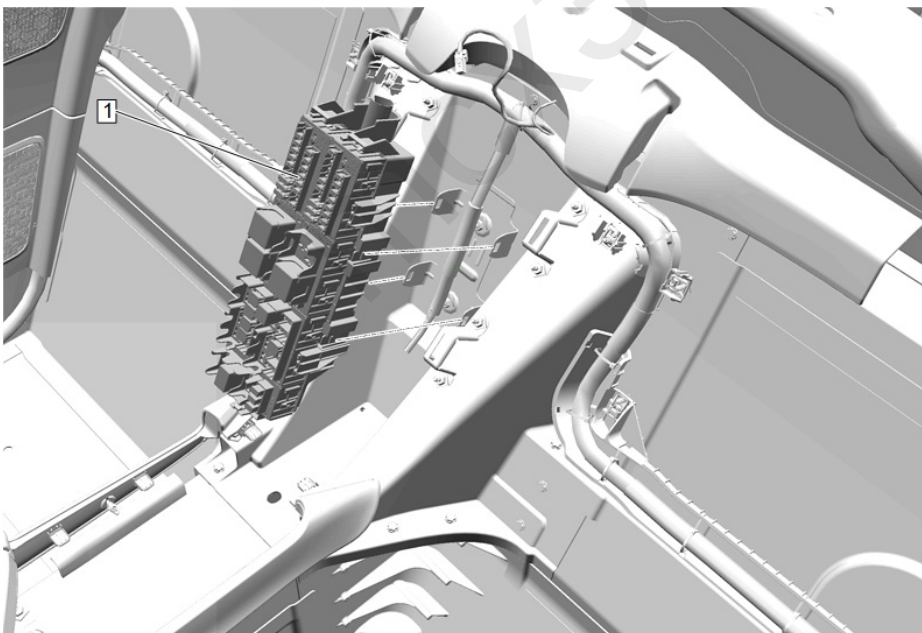


9. [Click here for full size](#)
10. Release the 4 body wiring harness junction block bracket tabs and reposition the body wiring harness junction block.
11. Release the fuse block terminals. Terminal Removal


Installation Procedure

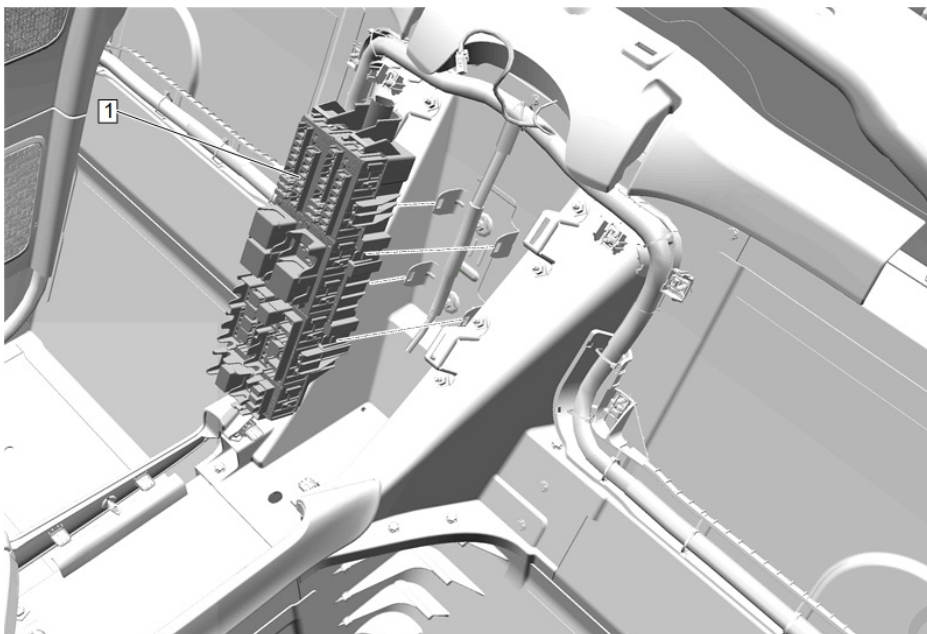

1. [Click here for full size](#)
2. Install the fuse block terminals.
3. Install the body wiring harness junction block (1) to the body wiring harness junction block bracket tabs.

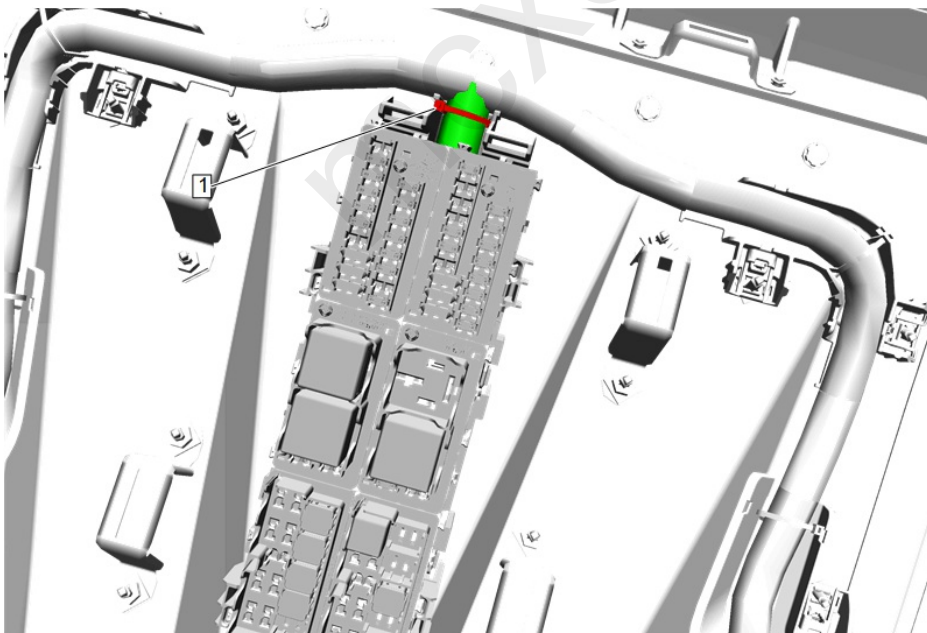


4. [Click here for full size](#)
5. Install a NEW wiring harness tie strap (1).

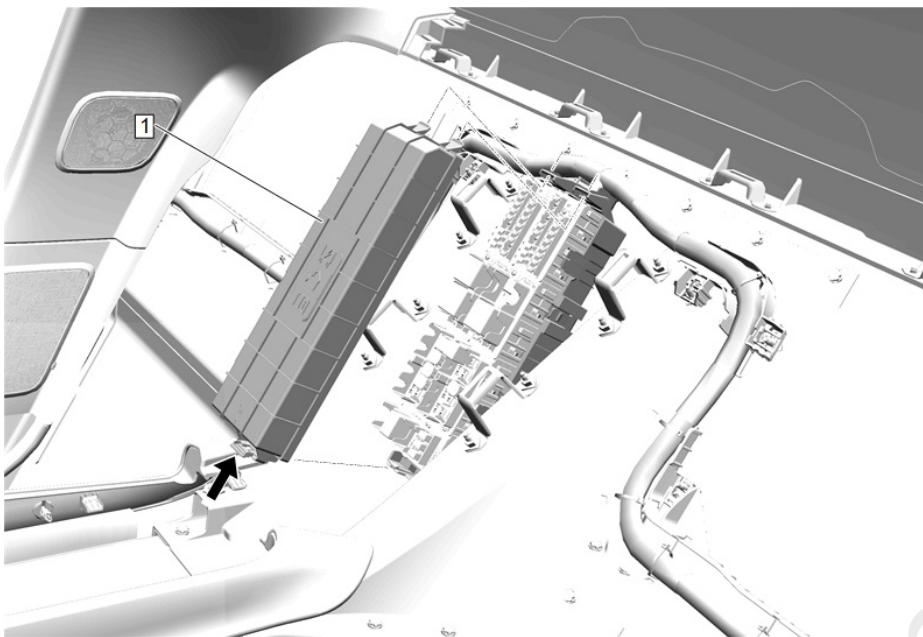


6.
[Click here for full size](#)

7. Body Wiring Harness Junction Block Cover (1) >> Install

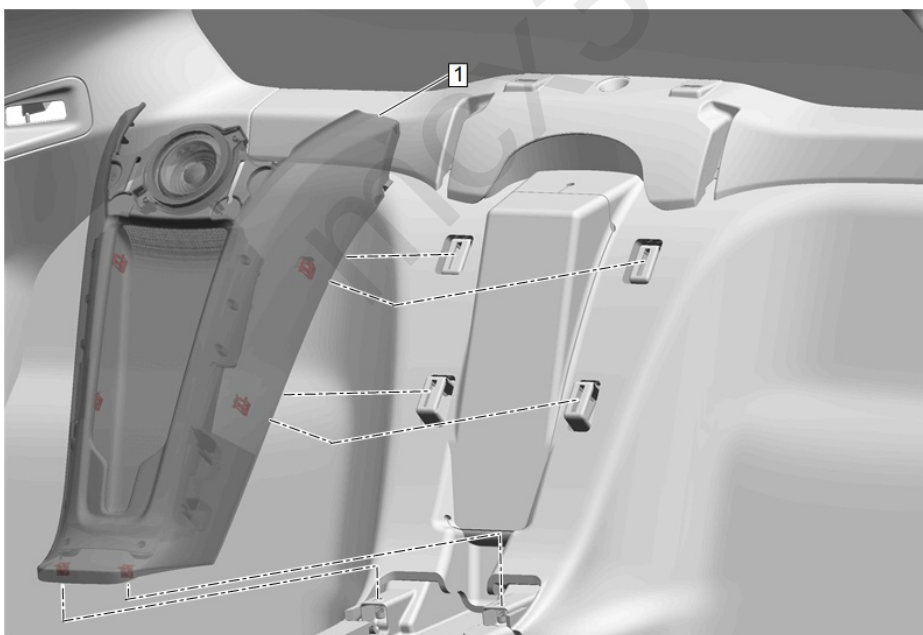

8.
[Click here for full size](#)

9. Rear Compartment Closeout Panel (1) >> Install - Rear Compartment Closeout Panel Replacement

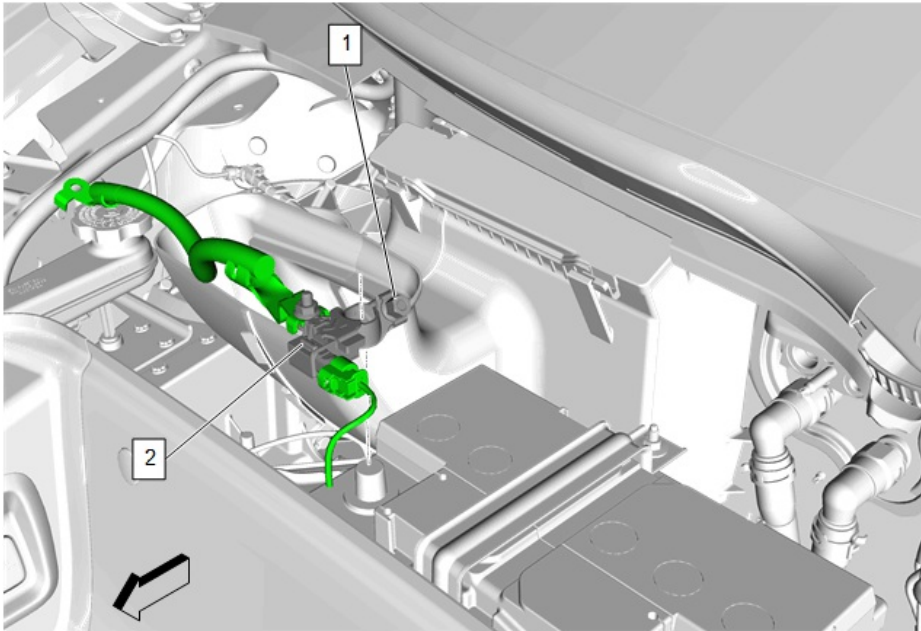

10.
[Click here for full size](#)

11. Connect the negative battery cable (2). Battery Negative Cable Disconnection and Connection

mcx30.com