

2022 CHEVROLET CORVETTE SERVICE MANUAL

- **SEARCH**

1. **Seats**
2. **Seat Hardware, Trim, and Upholstery**
3. **Repair Instructions**
- 4.


Front Seat Back Cushion Pad Support Replacement (AE4, AH2)

Removal Procedure

1. Warning:
Refer to SIR Warning.
2. Disable the SIR system. SIR Disabling and Enabling




3.
Click here for full size
4. Front Seat (2) >>> Remove - Front Seat Removal and Installation

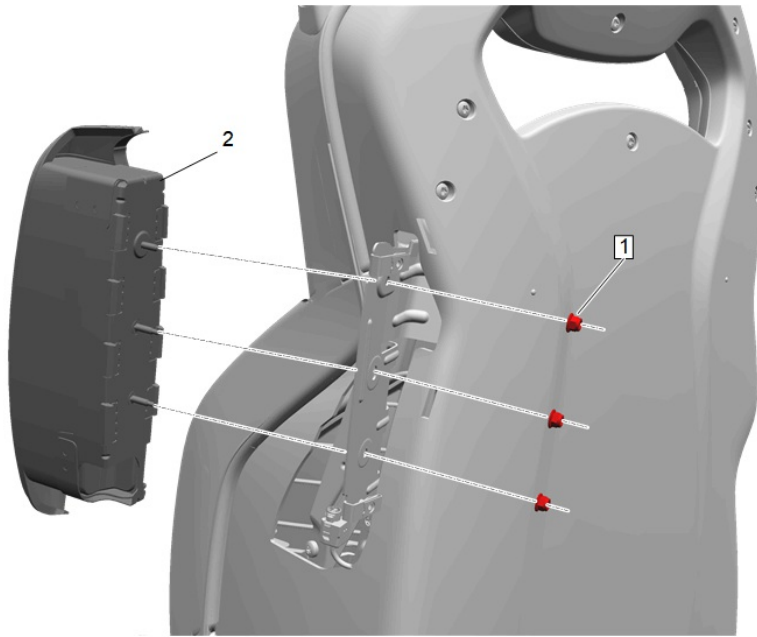

5. [Click here for full size](#)

6. Front Seat Outboard Seat Back Airbag (2) >> Remove - Front Seat Outboard Seat Back Airbag Replacement

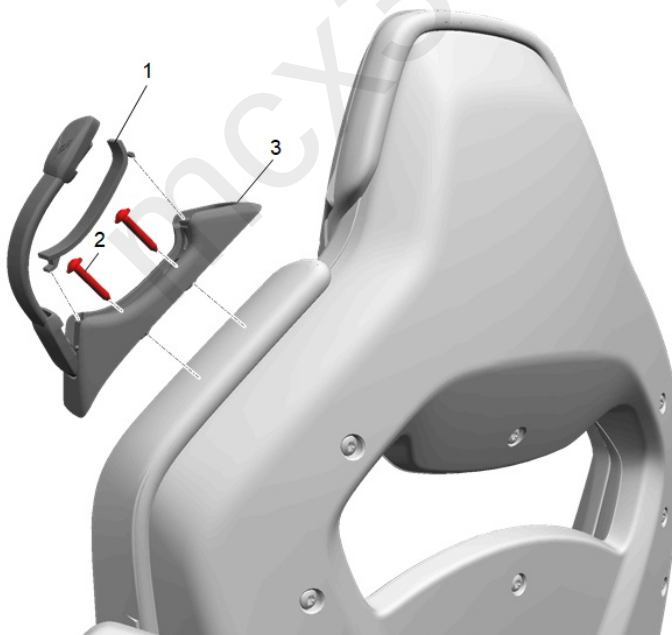


7. [Click here for full size](#)

8. Front Seat Belt Guide (3) >> Remove - Front Seat Belt Guide Replacement

9. Apply two layers of masking tape around the seat side surface to prevent paint damage.

10. [Click here for full size](#)

11. Front Seat Back Pad Support Screw (1) >> Remove [4x]

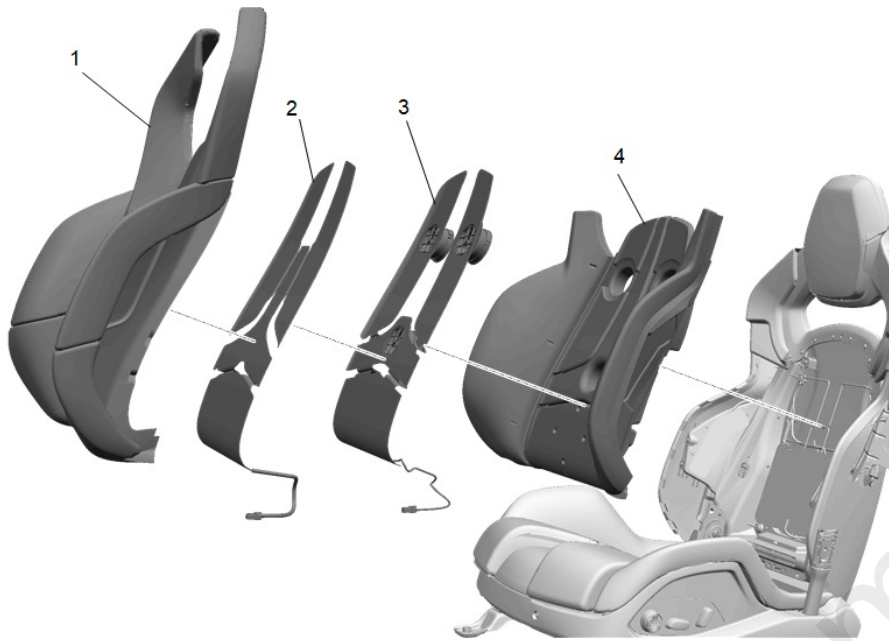

12. [Click here for full size](#)
[Extra Itemr video](#)

13. Starting at the top, release the J-channel retainer along both sides of the cover (1).

14. Release the hook and loop retainers on the rear of the front seat cushion cover.

15. Release the J-channel retainer along the bottom rear of the cover (1).

16. Apply two layers of masking tape around the top seat surface to prevent paint damage.

[Extra Itemr video](#)

17. Release the push in retainers along the top of the cover (1) near the seat back opening.

18. Disconnect the electrical connectors.

19. Remove the front seat back cover (1) and front seat back pad (3) as an assembly.


20. [Click here for full size](#)

21. Reposition the upper front seat back cover material as necessary.

22. Front Seat Back Cushion Pad Support (1) >> Remove


Installation Procedure

1. [Click here for full size](#)
2. Front Seat Back Cushion Pad Support (1) >> Install
3. Return the upper front seat back cover material to the original position.

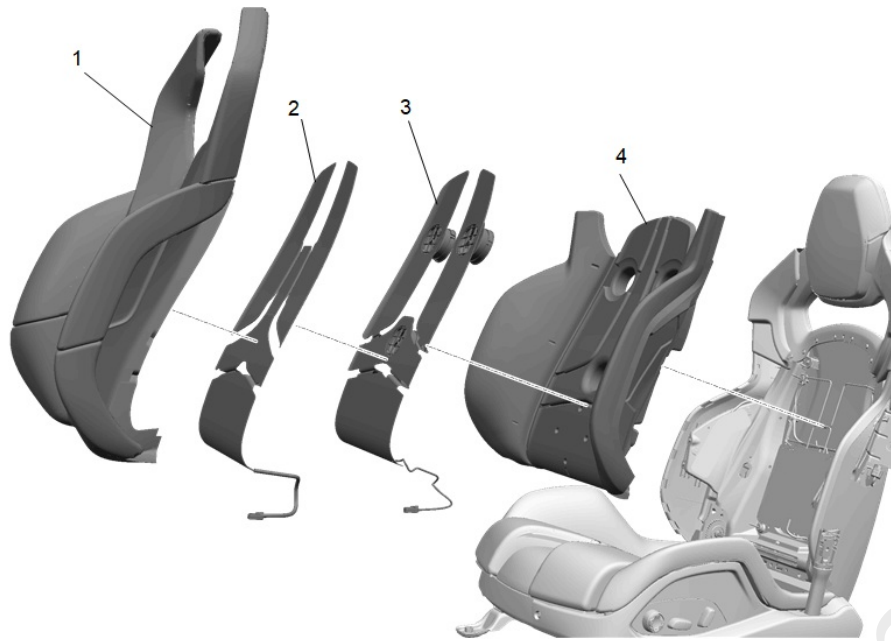

4. [Click here for full size](#)
5. Install the front seat back cover (1) and front seat back pad (3) as an assembly.
6. Connect the electrical connectors.
7. Install the push in retainers along the top of the cover (1) near the seat back opening.
8. Install the J-channel retainer along the bottom rear of the cover (1).
9. Install the hook and loop retainers on the rear of the front seat cushion cover.
10. Starting at the top, install the J-channel retainer along both sides of the cover (1).
11. Remove the two layers of masking tape around the top seat surface.
12. [Click here for full size](#)
13. **Caution:**

Refer to Fastener Caution.
14. Front Seat Back Pad Support Screw (1) >> Install and tighten [4x] - Front Seat Back Cover and Pad Replacement

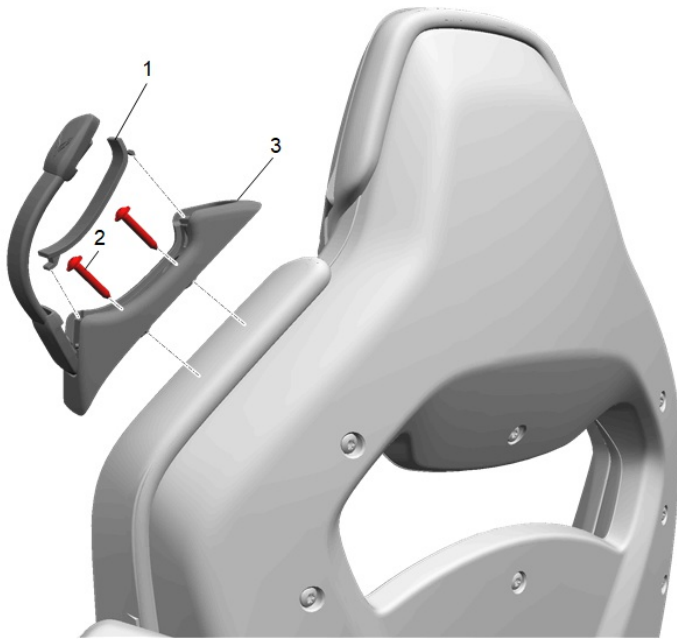


15.

[Click here for full size](#)

16. Front Seat Belt Guide (3) >>> Install - Front Seat Belt Guide Replacement

17. Remove the two layers of masking tape around the seat side surface.

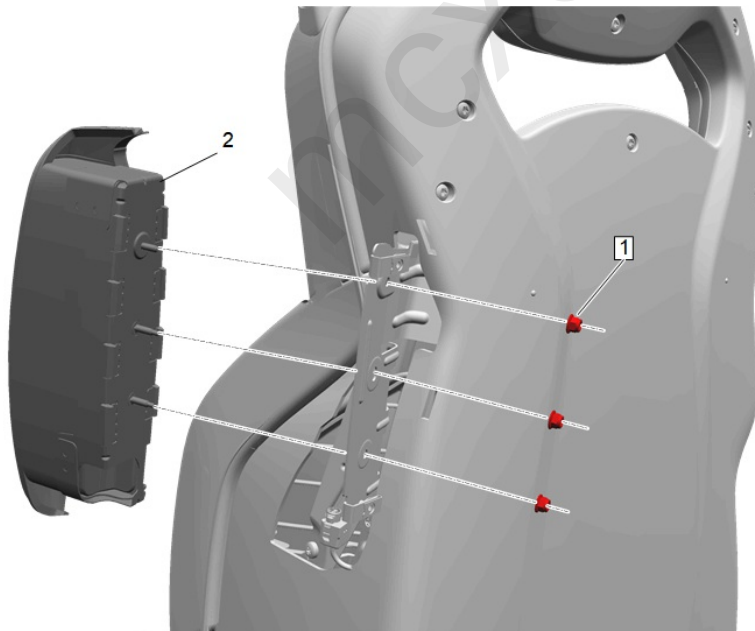

18.

[Click here for full size](#)

19. Front Seat Outboard Seat Back Airbag (2) >>> Install - Front Seat Outboard Seat Back Airbag Replacement



20.
[Click here for full size](#)

21. Front Seat (2) >>> Install - Front Seat Removal and Installation

22. Enable the SIR System, SIR Disabling and Enabling