


2022 CHEVROLET CORVETTE SERVICE MANUAL

- [SEARCH](#)

- 1. [Body Systems](#)
- 2. [Wipers and Washers](#)
- 3. [Repair Instructions](#)
- 4.

Windshield Washer Solvent Container Level Sensor Replacement

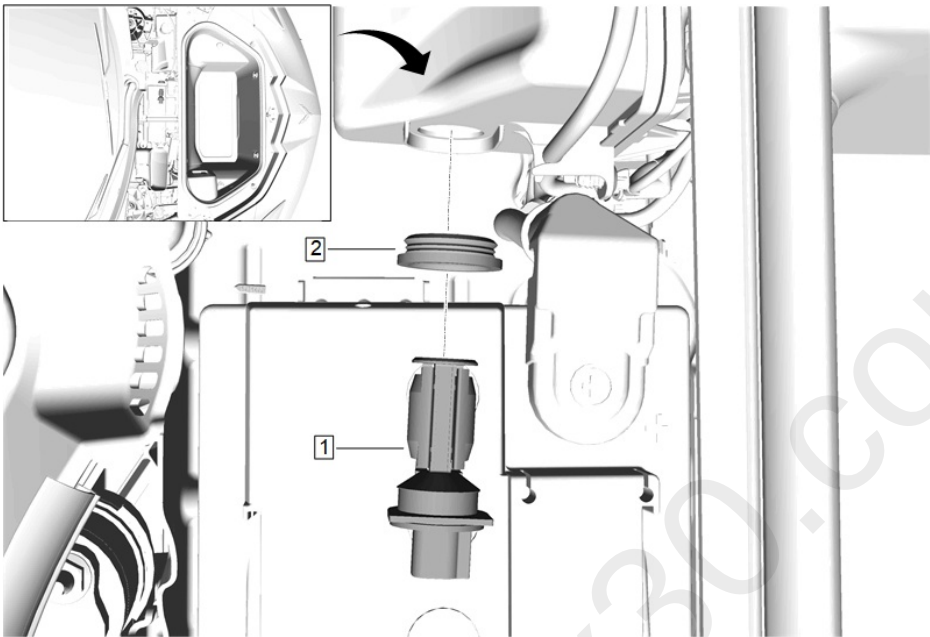

[Click here for full size](#)
Front Compartment Rear Access Cover Replacement

- Place a clean suitable rag under the windshield washer solvent container to absorb the windshield washer solvent when the level sensor and seal are removed.

Callout	Component Name
Preliminary Procedures	
1.	
1	Windshield Washer Solvent Container Level Sensor Procedure 1. Disconnect the electrical connector. 2. Using two flat-bladed tools, place the blades under each side of the windshield washer solvent container level sensor. 3. Twist the two flat-bladed tools in opposite directions to lift and disengage the windshield washer solvent container level sensor from the windshield washer solvent container and grommet.

Callout	Component Name
2	Windshield Washer Solvent Container Level Sensor Grommet Procedure 1. Carefully squeeze the grommet while using a flat-bladed tool to pry upward under the edge of the grommet. 2. When installing the grommet, use full strength windshield washer fluid as a lubricant on the grommet. 3. Push the grommet into the windshield washer solvent container until fully seated.

mcx30.com