

Front Center Seat Backrest Cover - Regular Cab

Base Part Number: Base Part Number: 64416

Removal

All seats

1. Remove the front center seat.
Refer to: [Front Center Seat](#) (501-10A Front Seats, Removal and Installation).
2. Position the seat cushion up.



3. Remove the cup holder.



E195565



4. Remove screws and the seat storage tray.



E195571




5. Position the seat cushion down.



E195585




6. Release the seat latch and fold the seat backrest down.

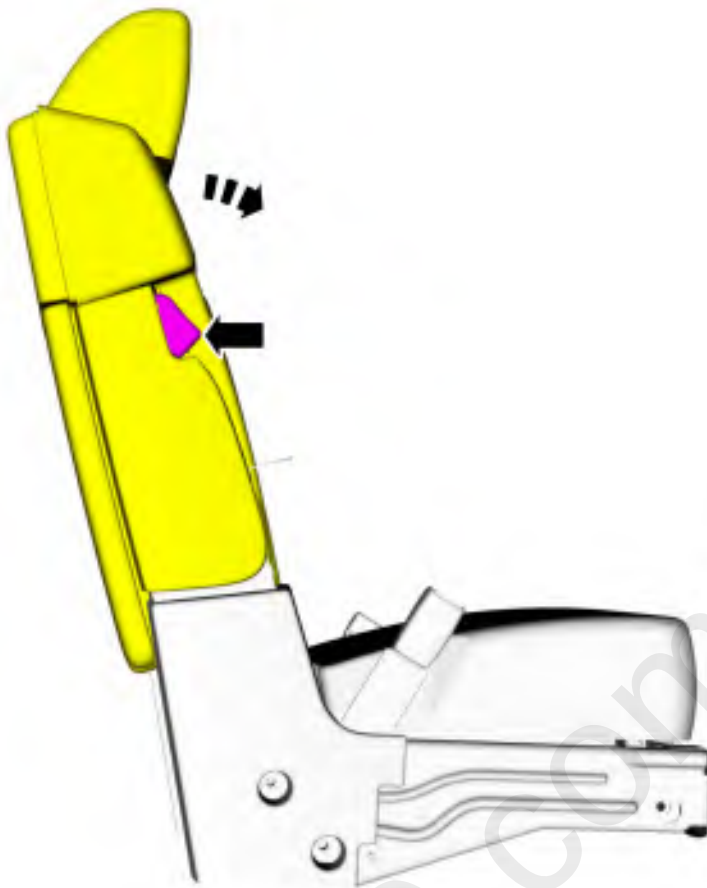


E195586




7. Remove the backrest latch cover.

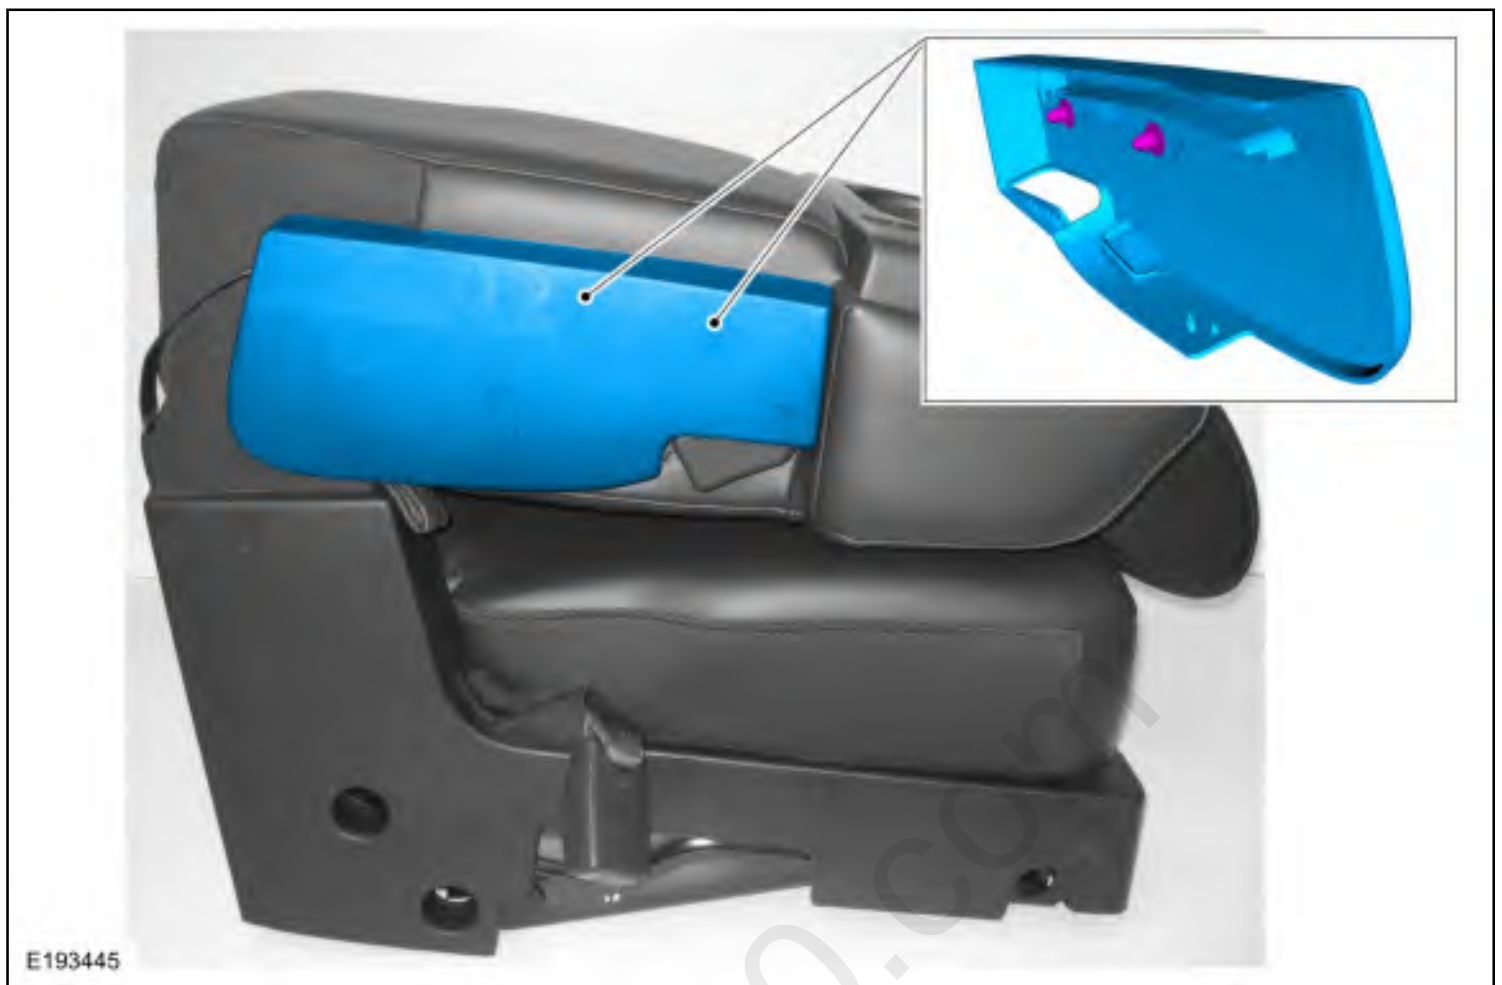


8. Remove the screws, release the retaining clip and remove the RH side shield.

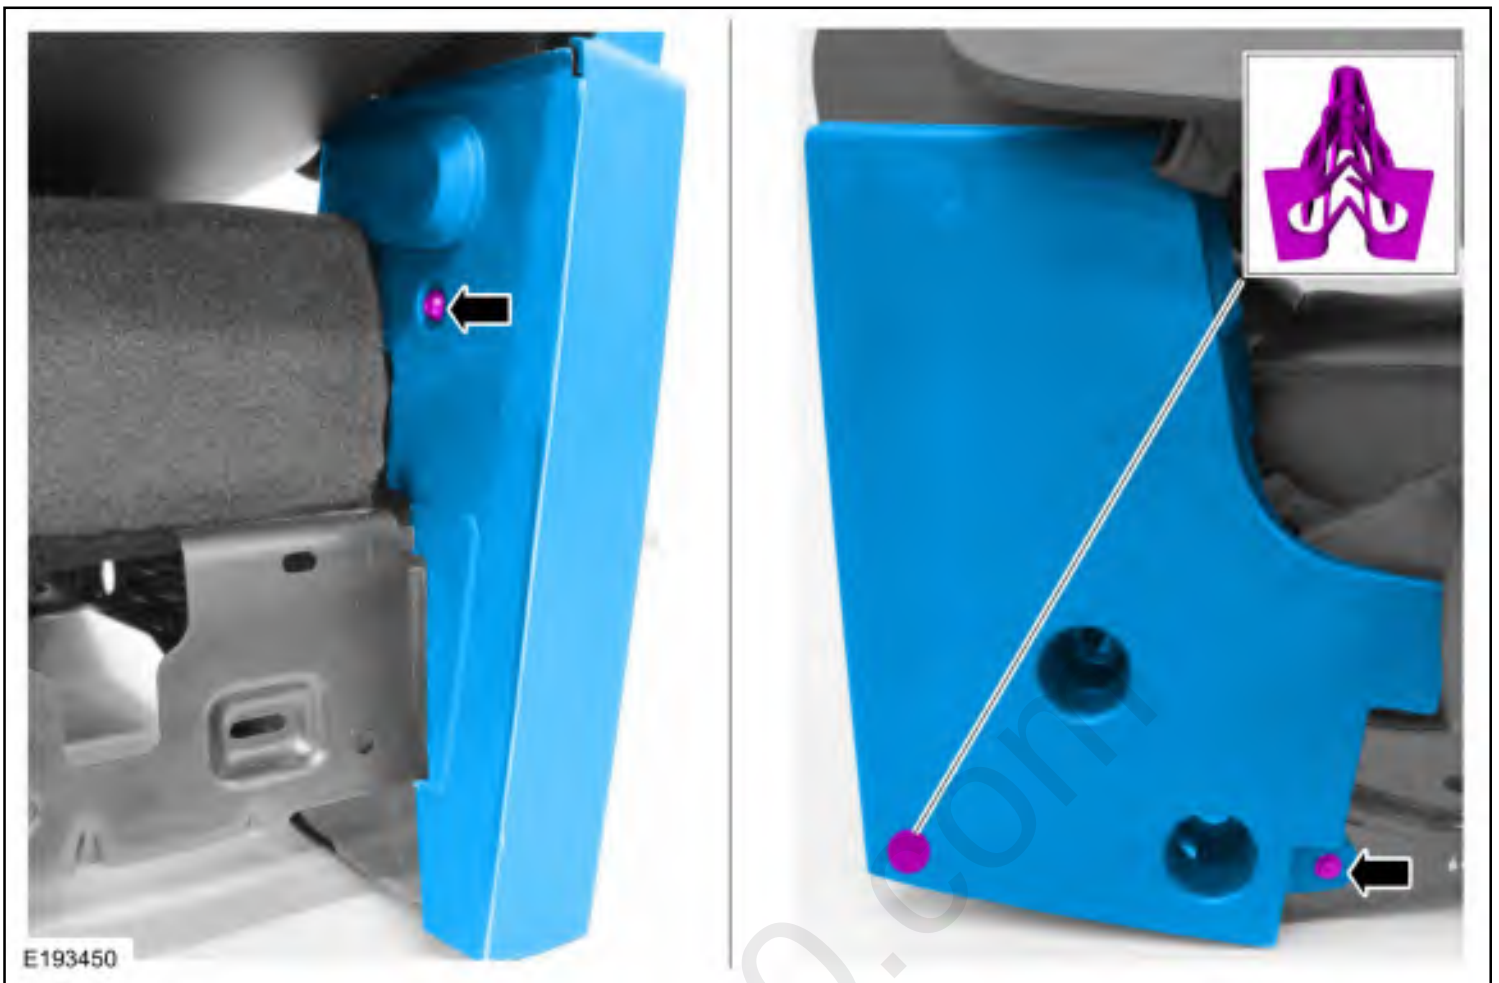

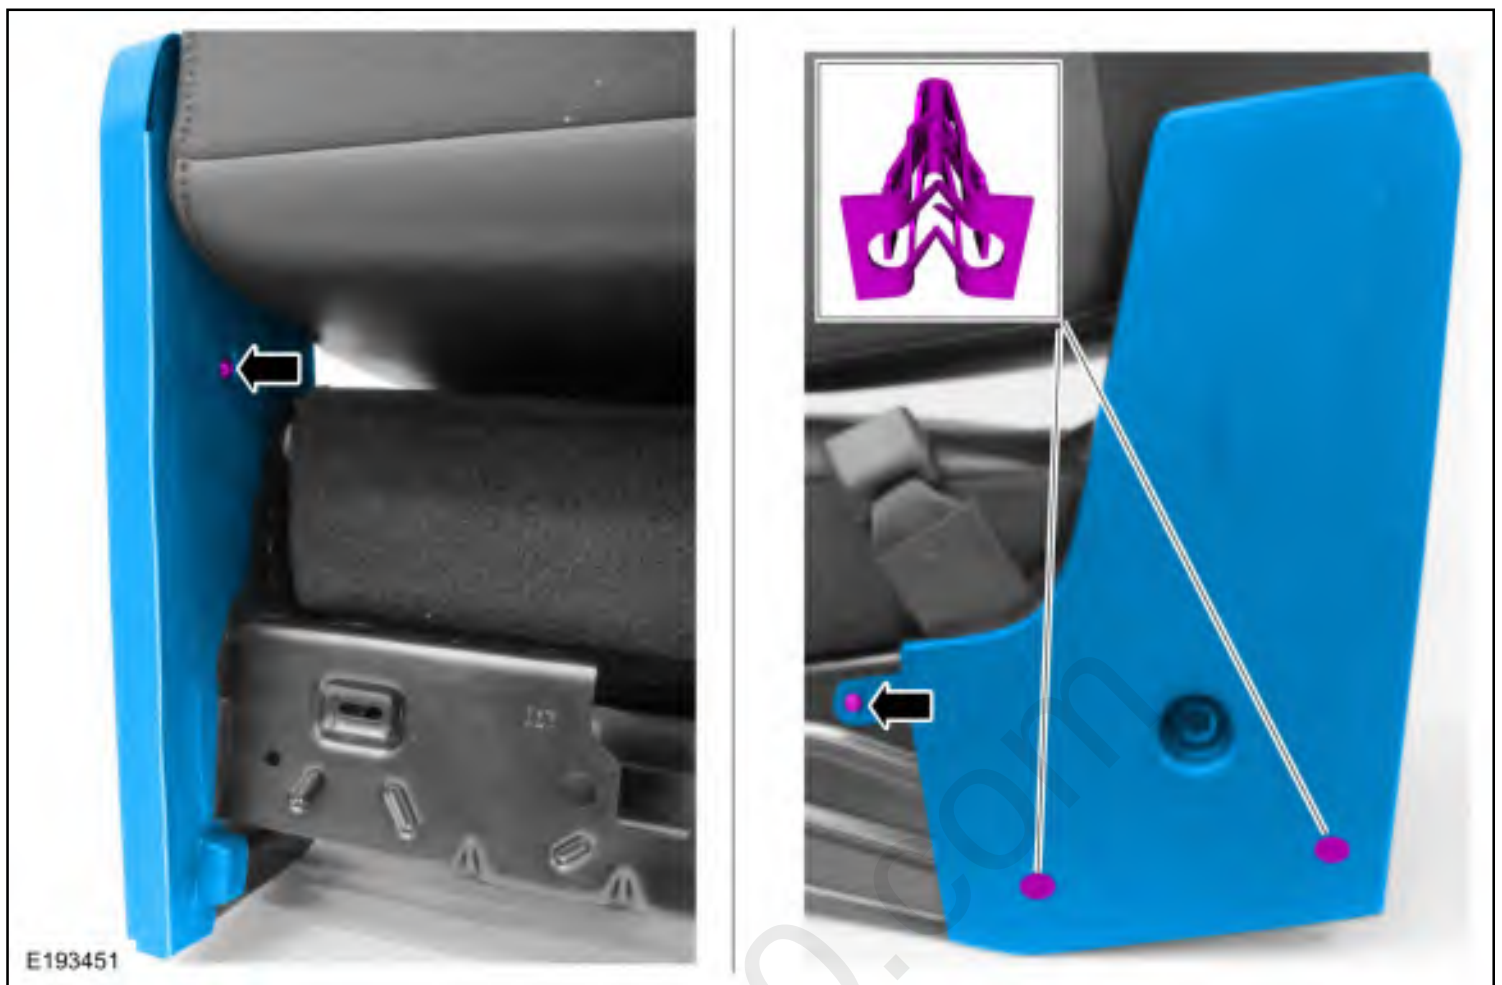


10. Release the seat latch and raise the seat backrest up.

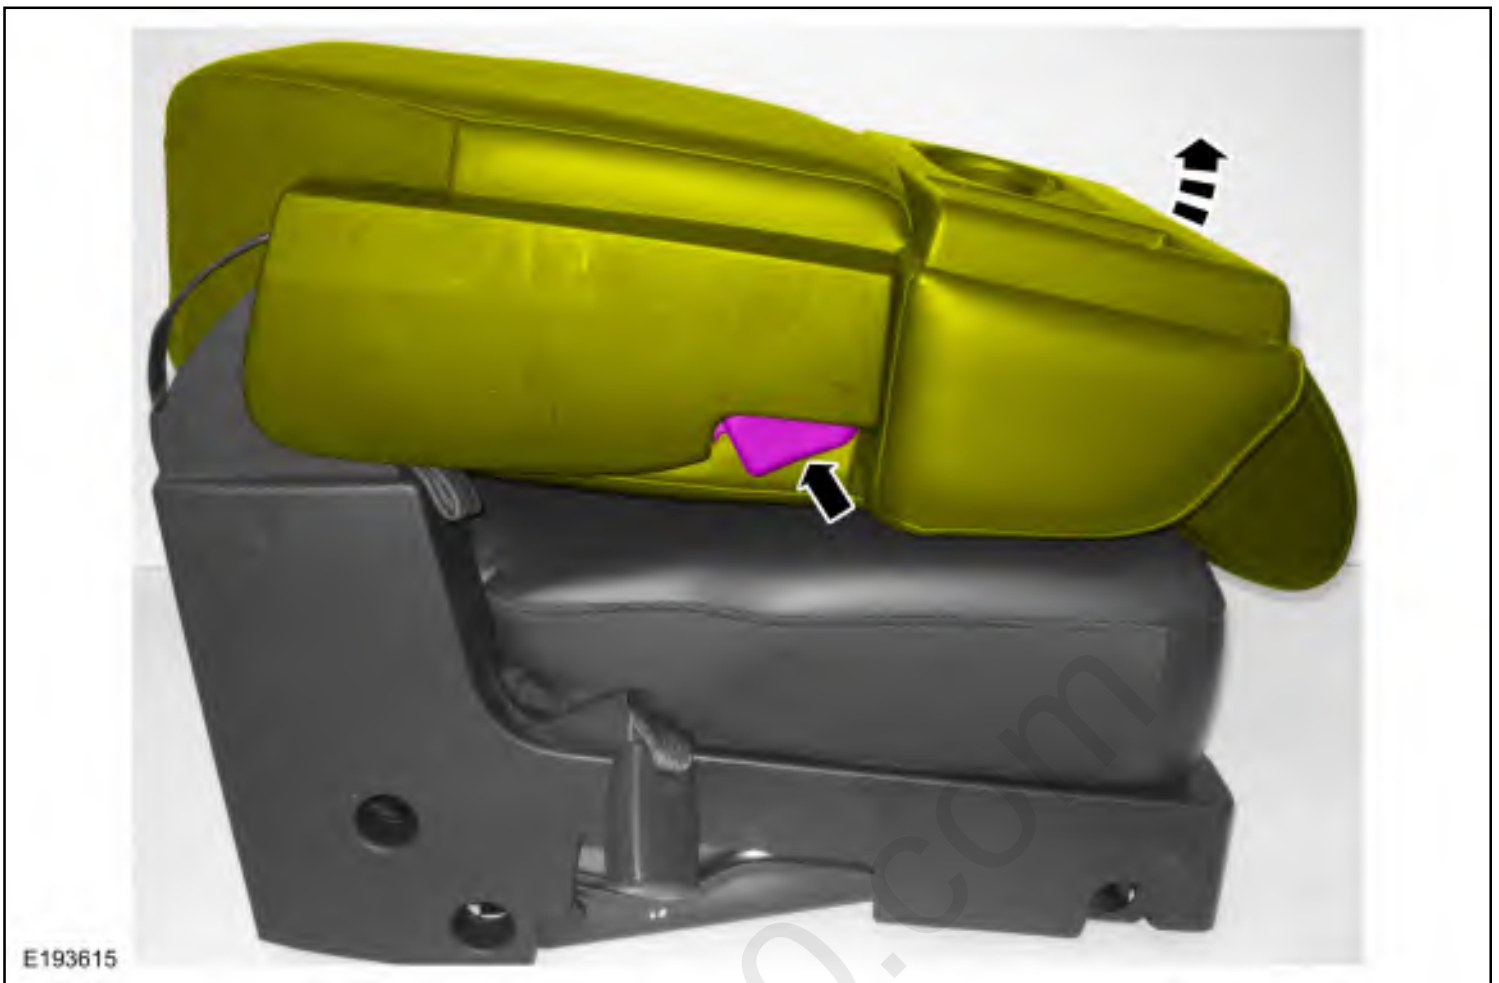


11. Remove the head restraint guide sleeves.
Refer to: [Front Head Restraint Guide Sleeve](#) (501-10A Front Seats, Removal and Installation).
12. Remove the backrest.
 1. Remove the stop bolt.
Torque: 22 lb.ft (30 Nm)
 2. Remove the pivot bolt.
Torque: 33 lb.ft (45 Nm)
 3. Remove the backrest latch upper bolts.
Torque: 33 lb.ft (45 Nm)



13. Remove the cup holder insert.

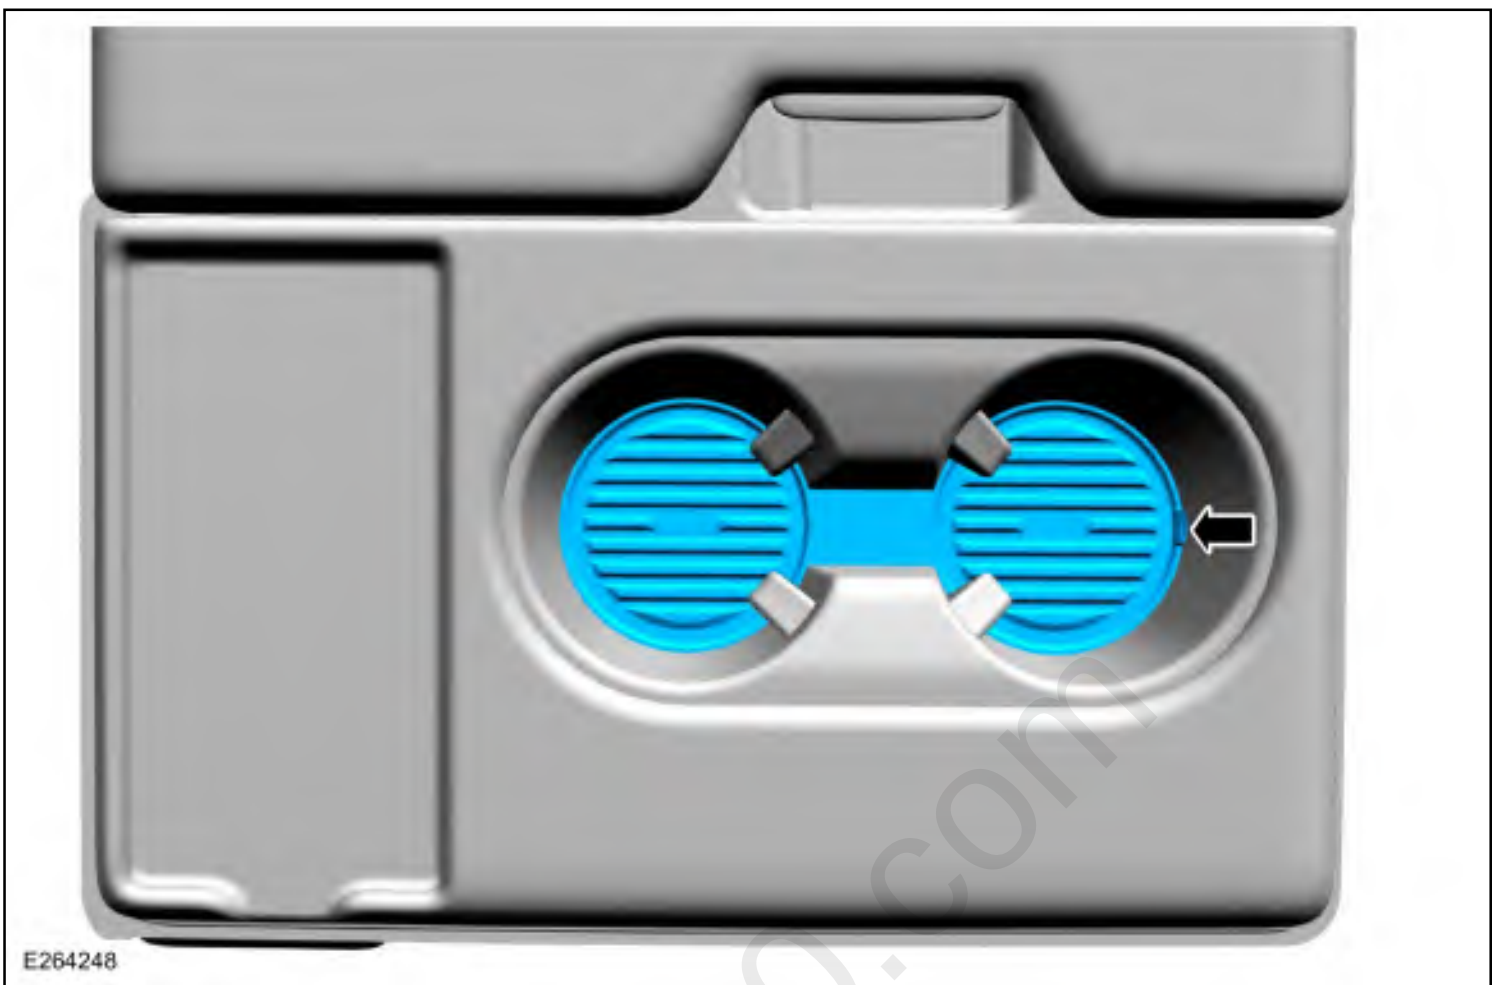


14. Remove the cup holder.
 1. Remove the screw.
 2. Release the retaining clips.

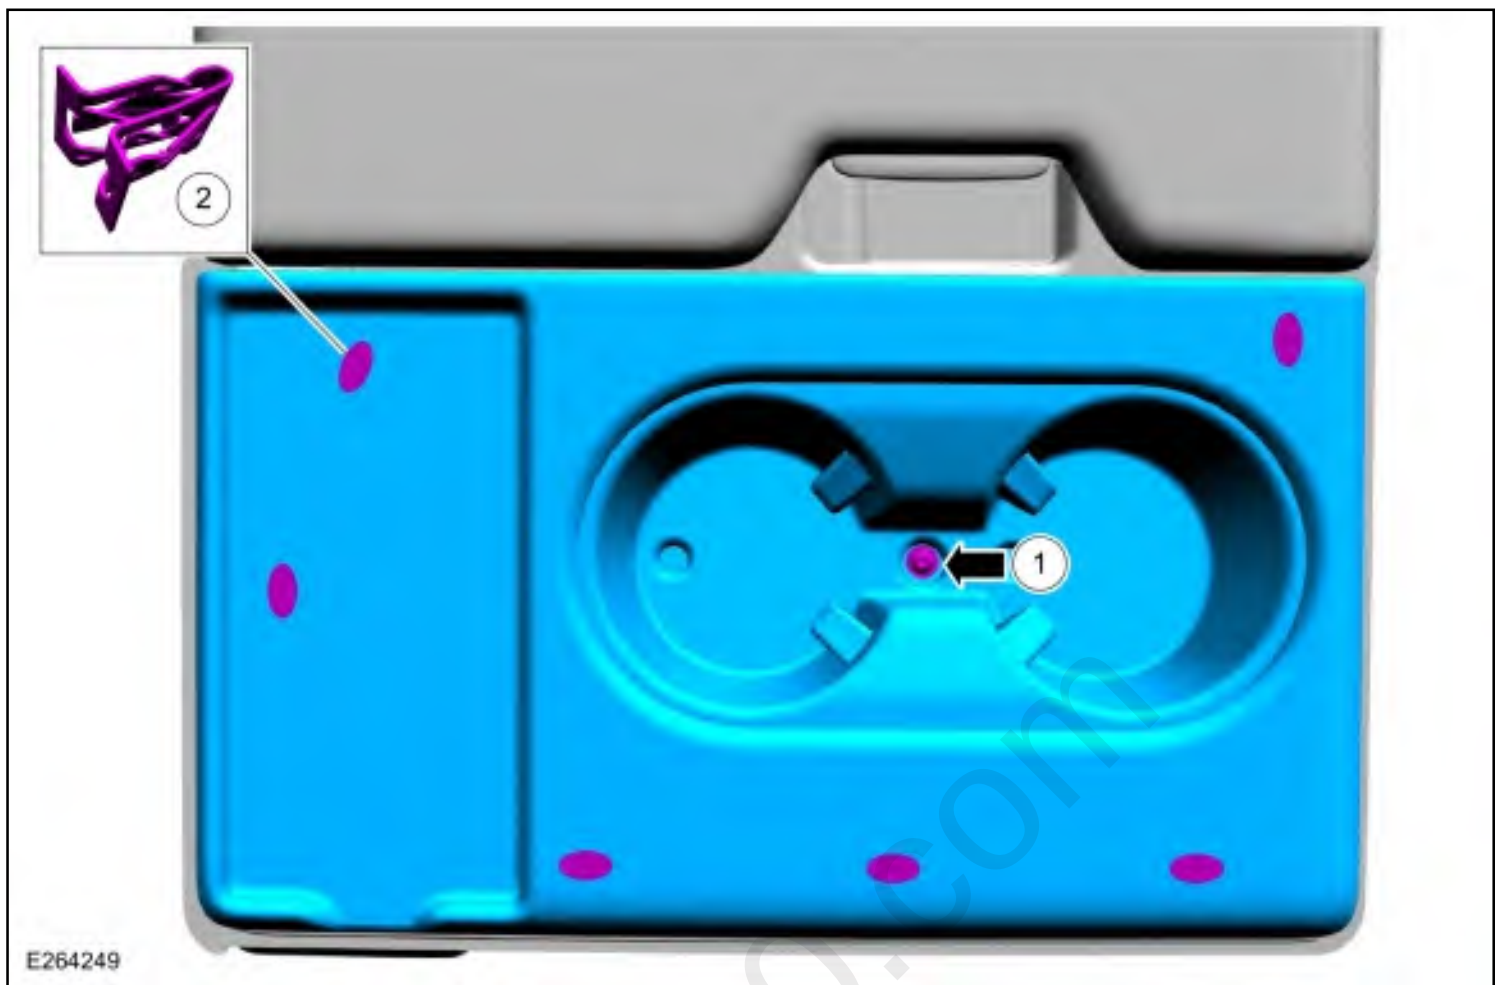


Seats with storage tray

15. Remove the trim cover.

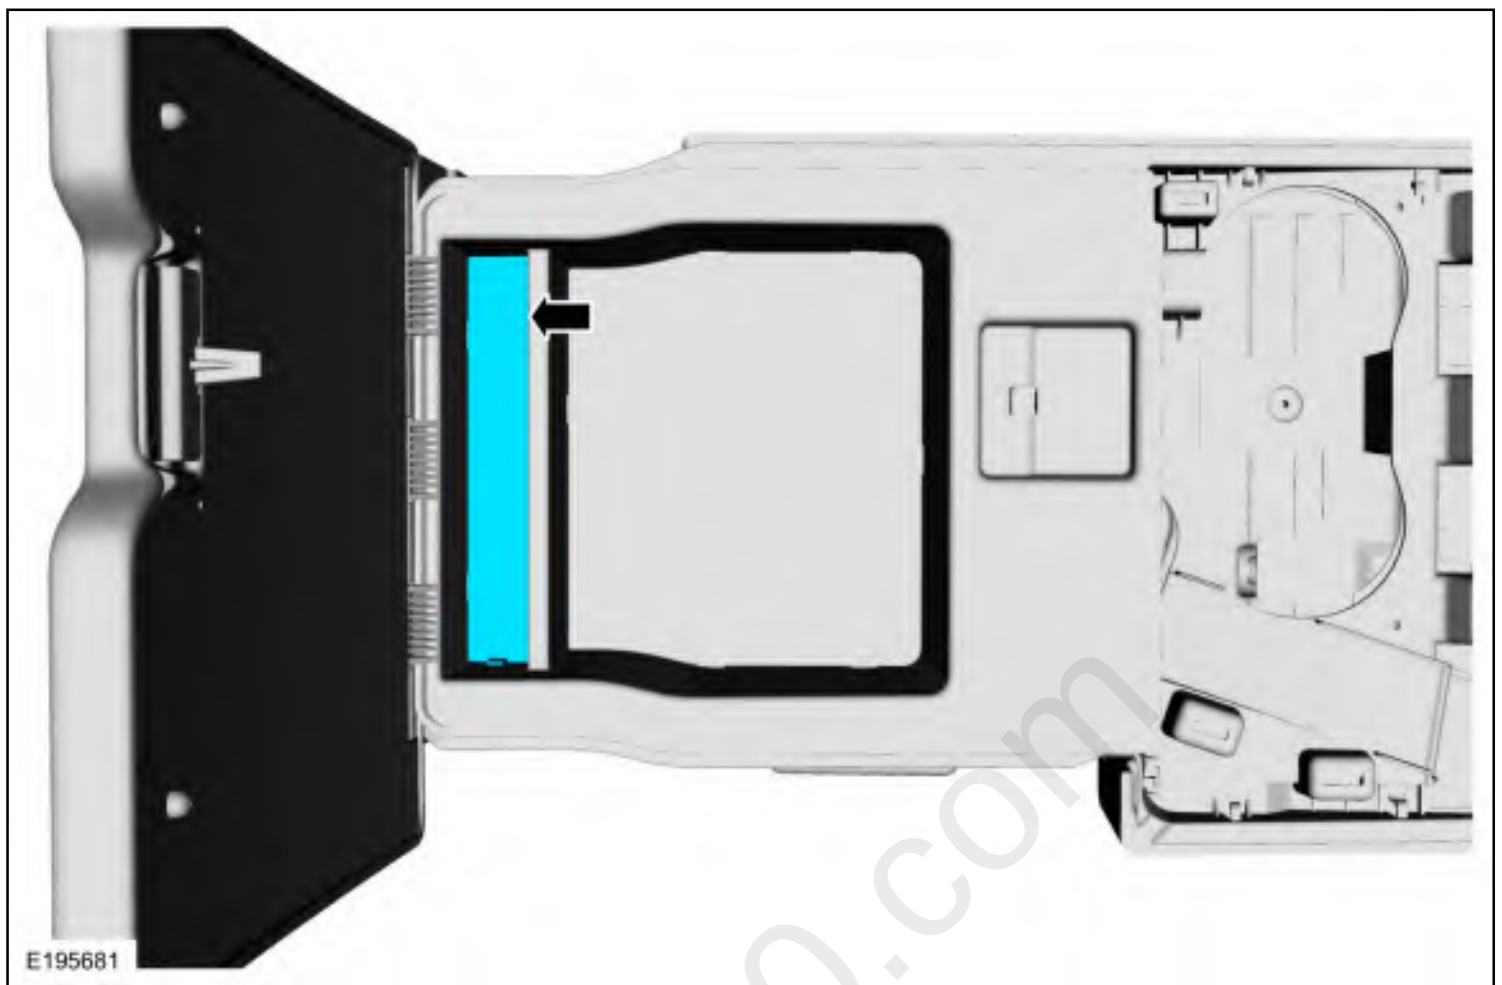


16. Remove the armrest storage tray.
1. Remove the screws.
 2. Release the retainers.
 3. Remove the storage tray.

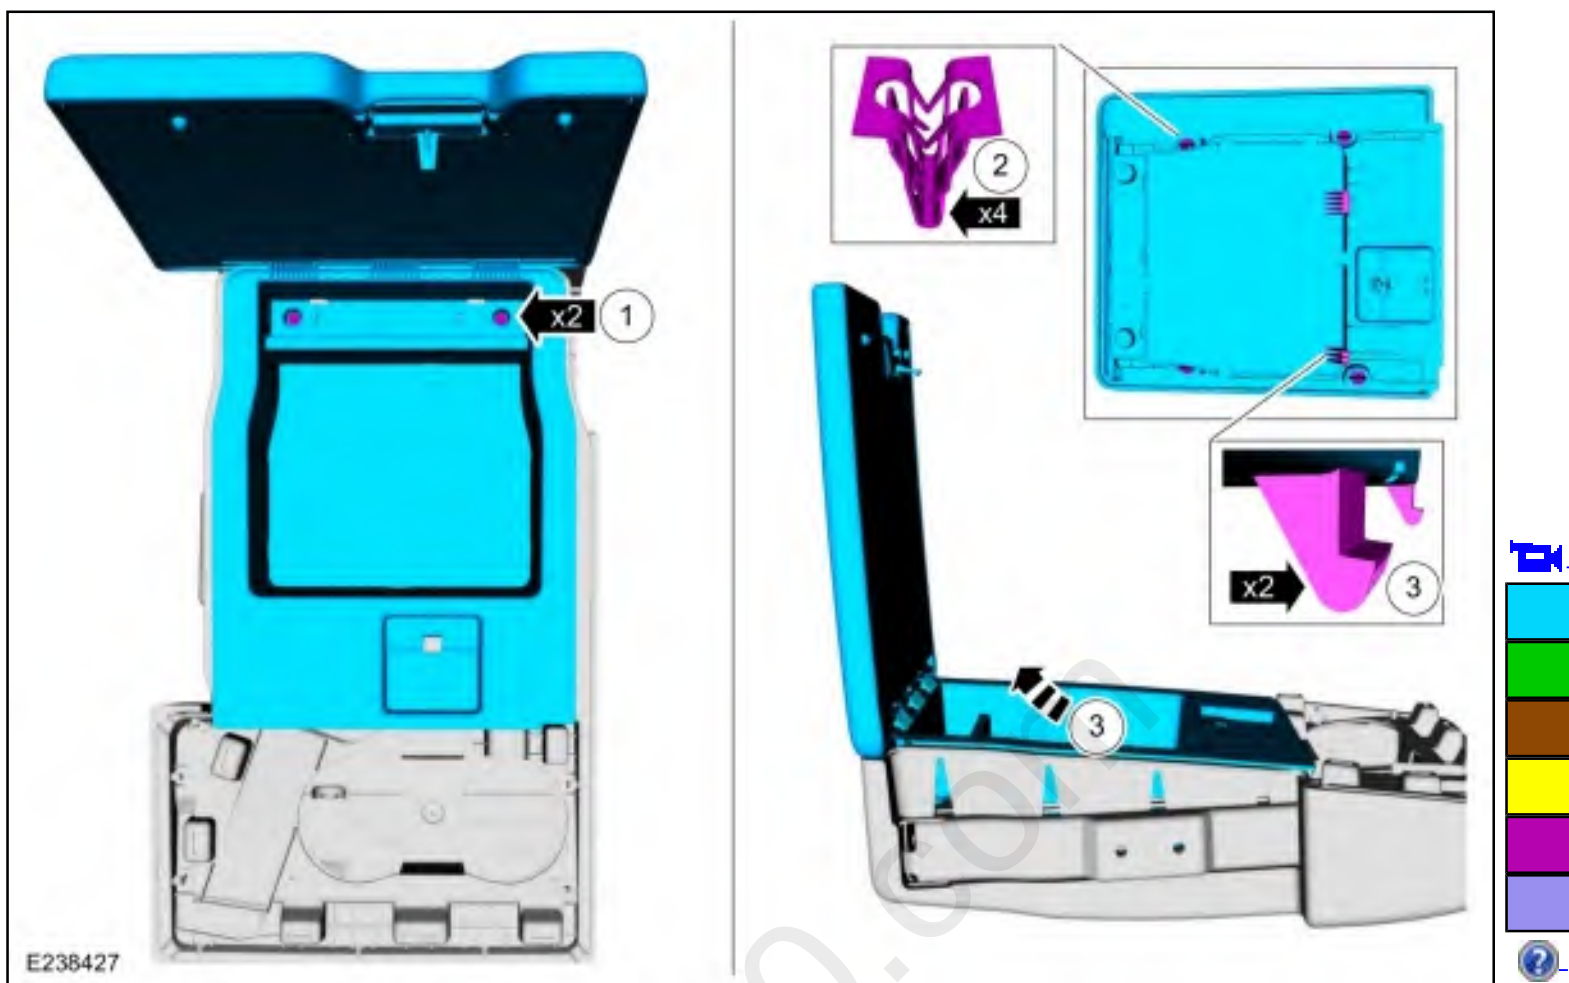

17. **NOTE:** *Seat backrest with seatbelt retractor shown, seat backrest without seatbelt retractor similar.*

Release the cover from the J-hooks and remove the backrest cover.

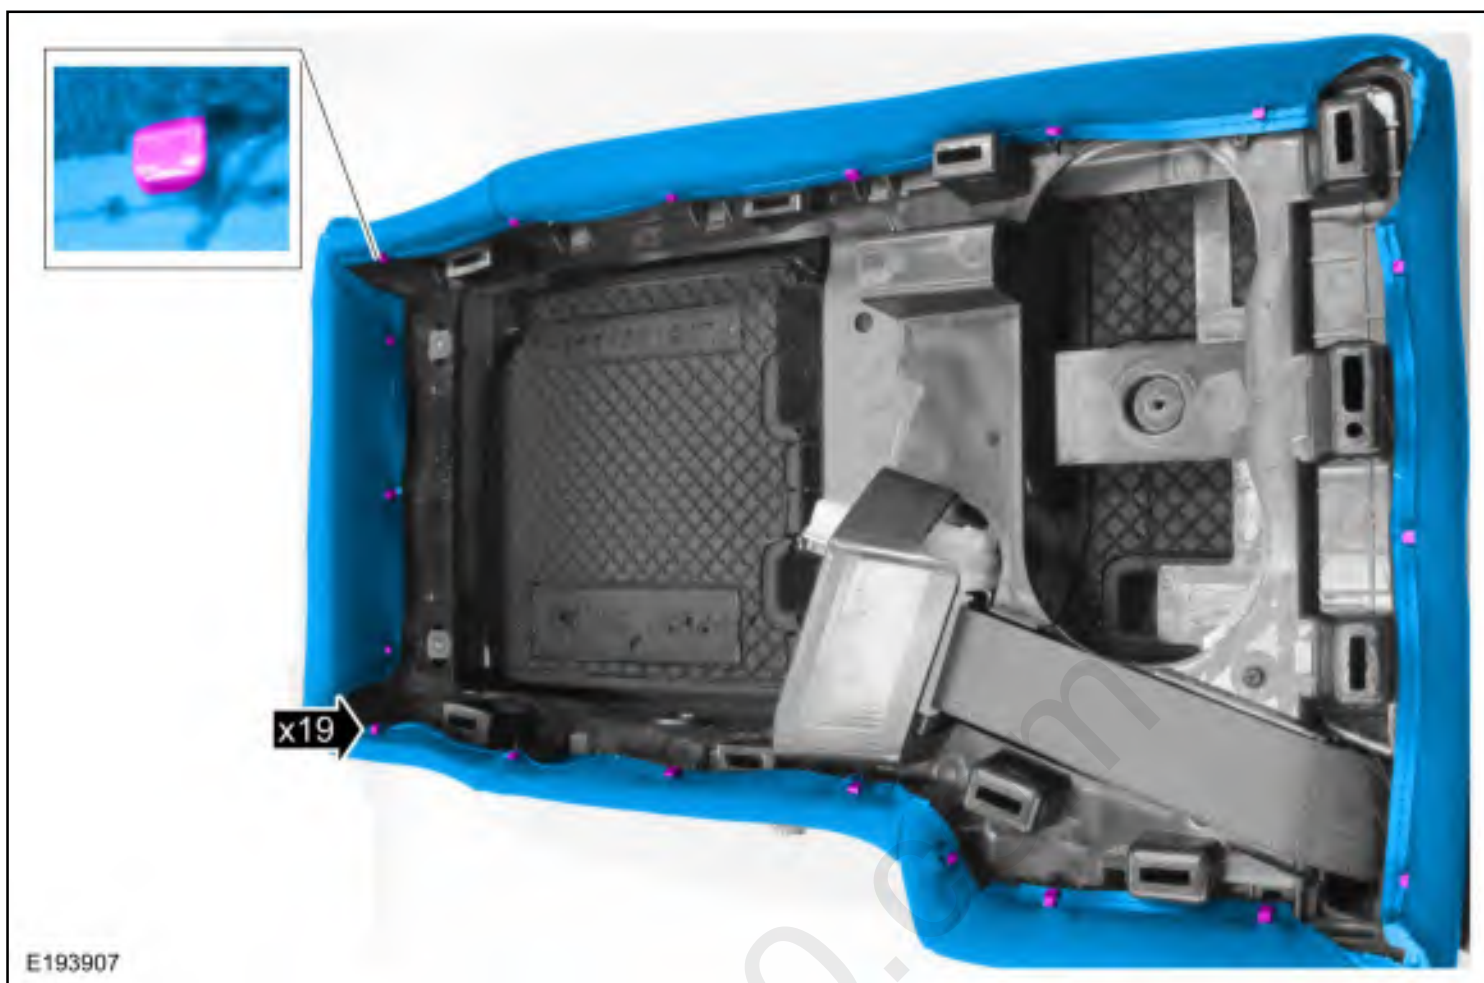

Seats without storage tray

18. Position the backrest cover flap aside.



19. Release the cover from the J-hooks and position the backrest cover aside.




20. **NOTICE:** Use care when separating the seat backrest trim cover from the hook-and-loop strip or the hook-and-loop strip may be torn from the seat backrest foam pad.

Release the hook-and-loop strip and remove the backrest cover.



E194003



Installation

1. To install, reverse the removal procedure.

Copyright © 2018 Ford Motor Company