


Rear Door Check Arm - Crew Cab

Removal

NOTE: Removal steps in this procedure may contain installation details.

NOTE: LH shown, RH similar.


1. Open the rear door.

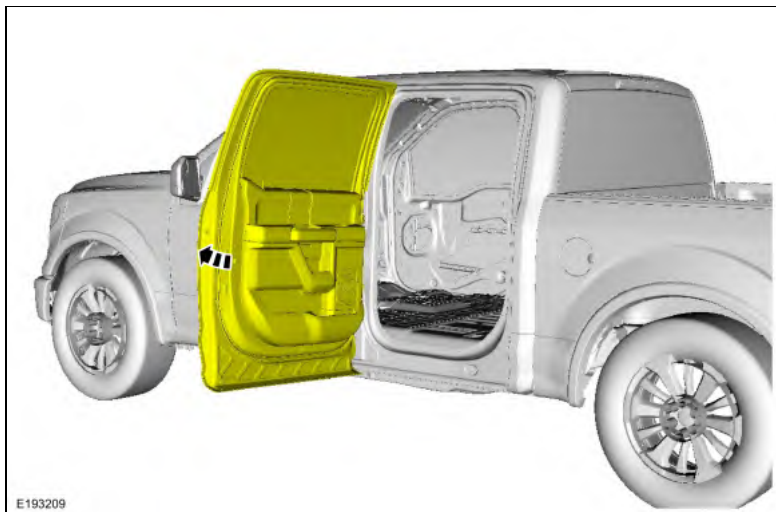

2. Remove the check arm bolt.
Torque: 17 lb.ft (22.5 Nm)




3. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - Crew Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).
4.
 1. Disconnect the electrical connector.
 2. Remove the bolts and the speaker.

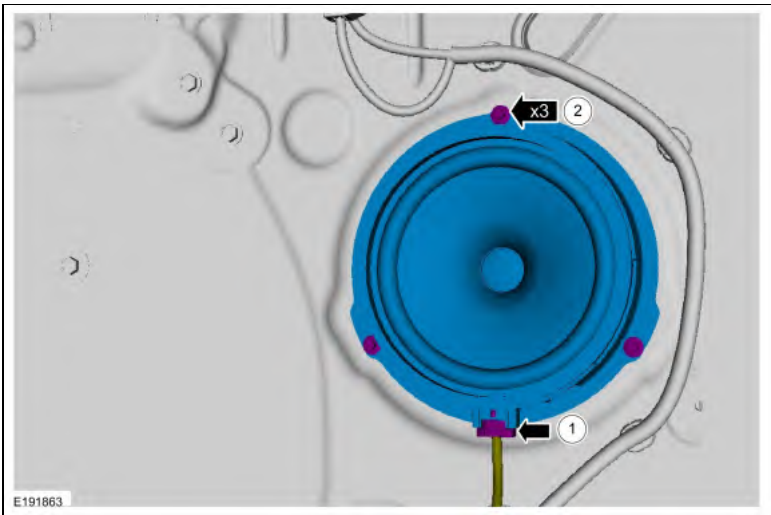

5. Remove the nuts.
Torque: 80 lb.in (9 Nm)



6. Remove the check arm assembly.

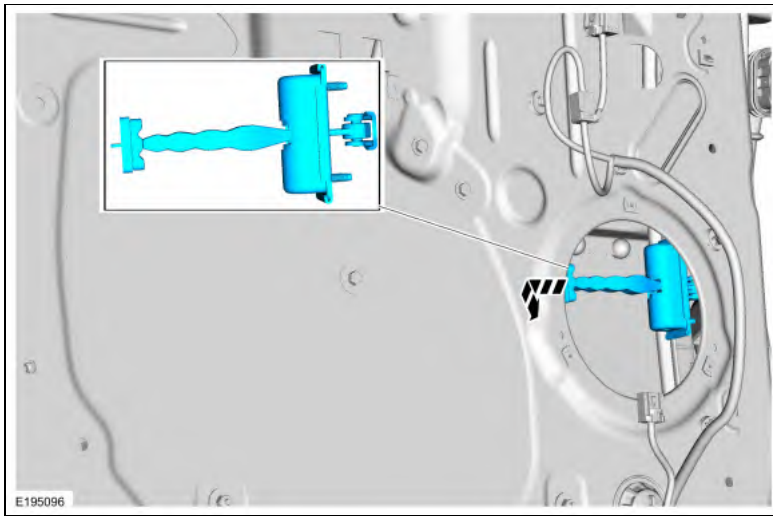

Installation

1. To install, reverse the removal procedure.