



mcx30.com


ANTI-CORROSION PROTECTION PRODUCTS AFTER ASSEMBLY

1. ELECTROGALVANIZING

See Technical Note 592A, Paint application procedure, 94A, Paint application procedure for panels, Electrogalvanizing (steel panels)

2. EXTRUDED MASTIC

Protection used in visible areas requiring a good appearance, especially for protecting crimps.

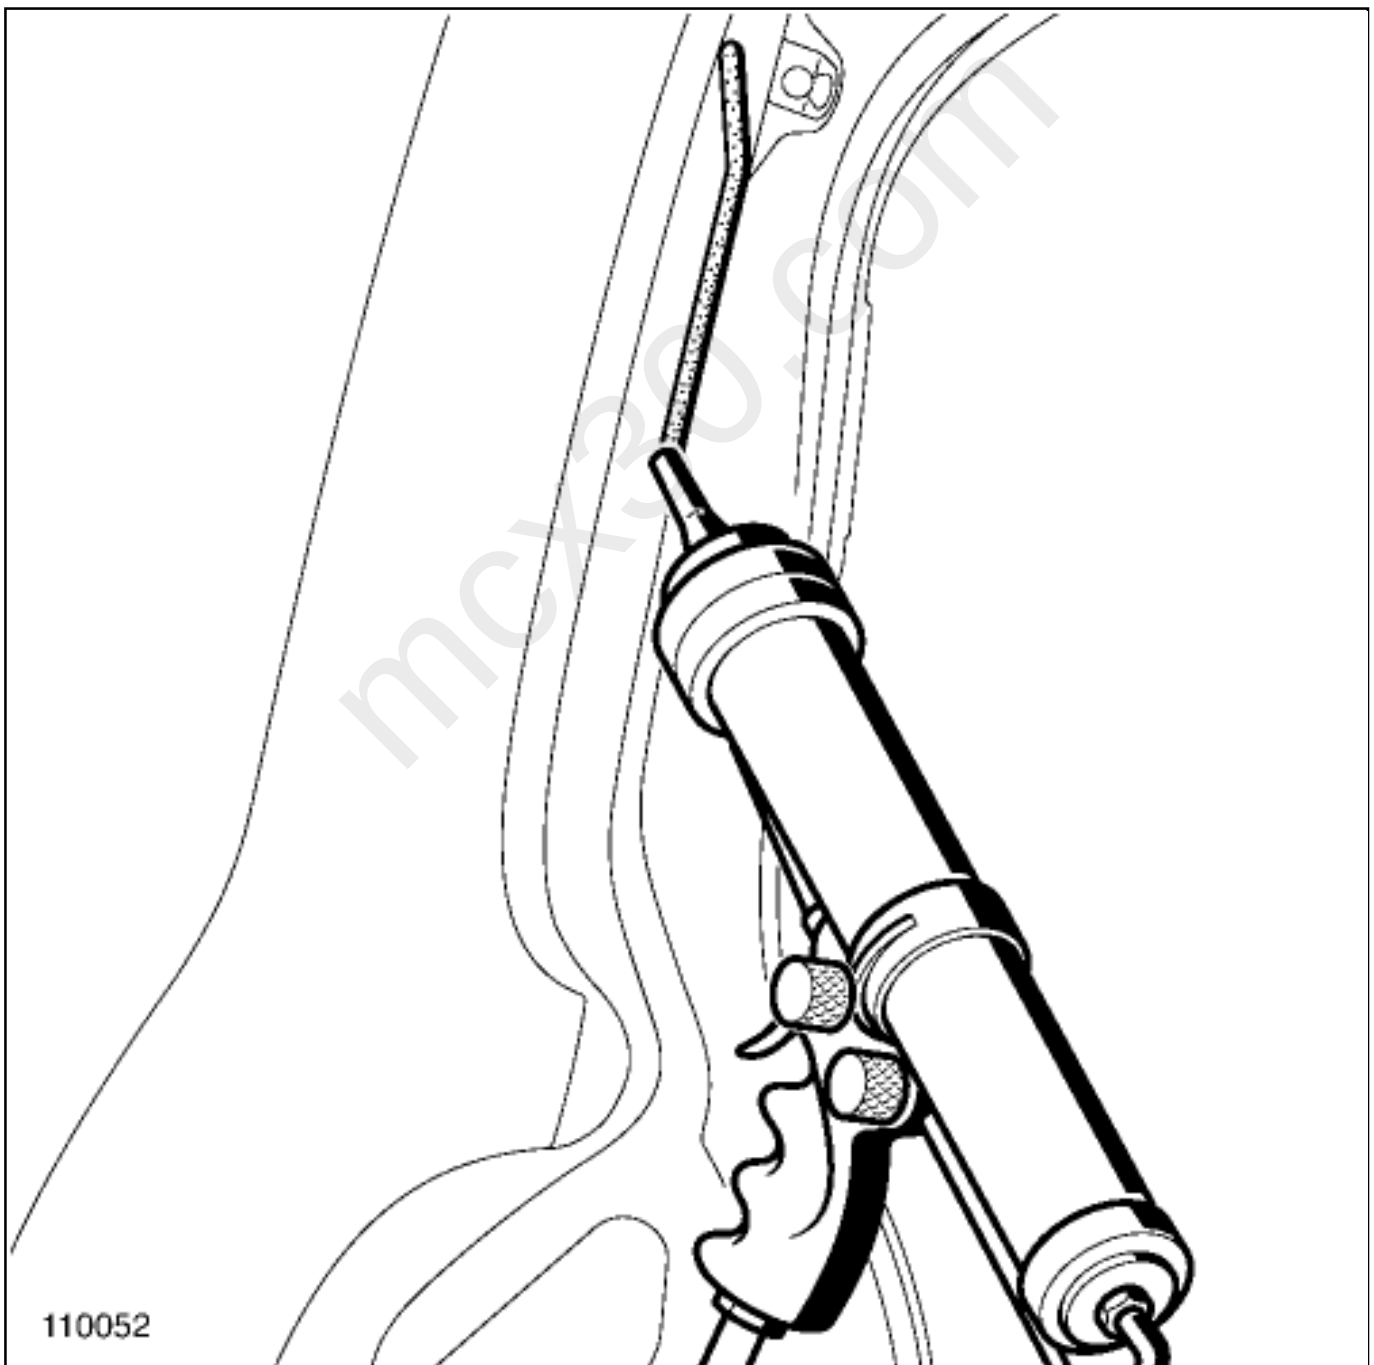

Advantages:

- Possibility of painting after drying.
- excellent adhesion on any base.
- Good edge protection (panel edge).



Disadvantage:




Original appearance difficult to reproduce without smoothing.

3. POWDERED MASTIC

Mastic suited for protecting the lower parts of the body (anti-grit) or powdered mating surface protection.

mcx30.com

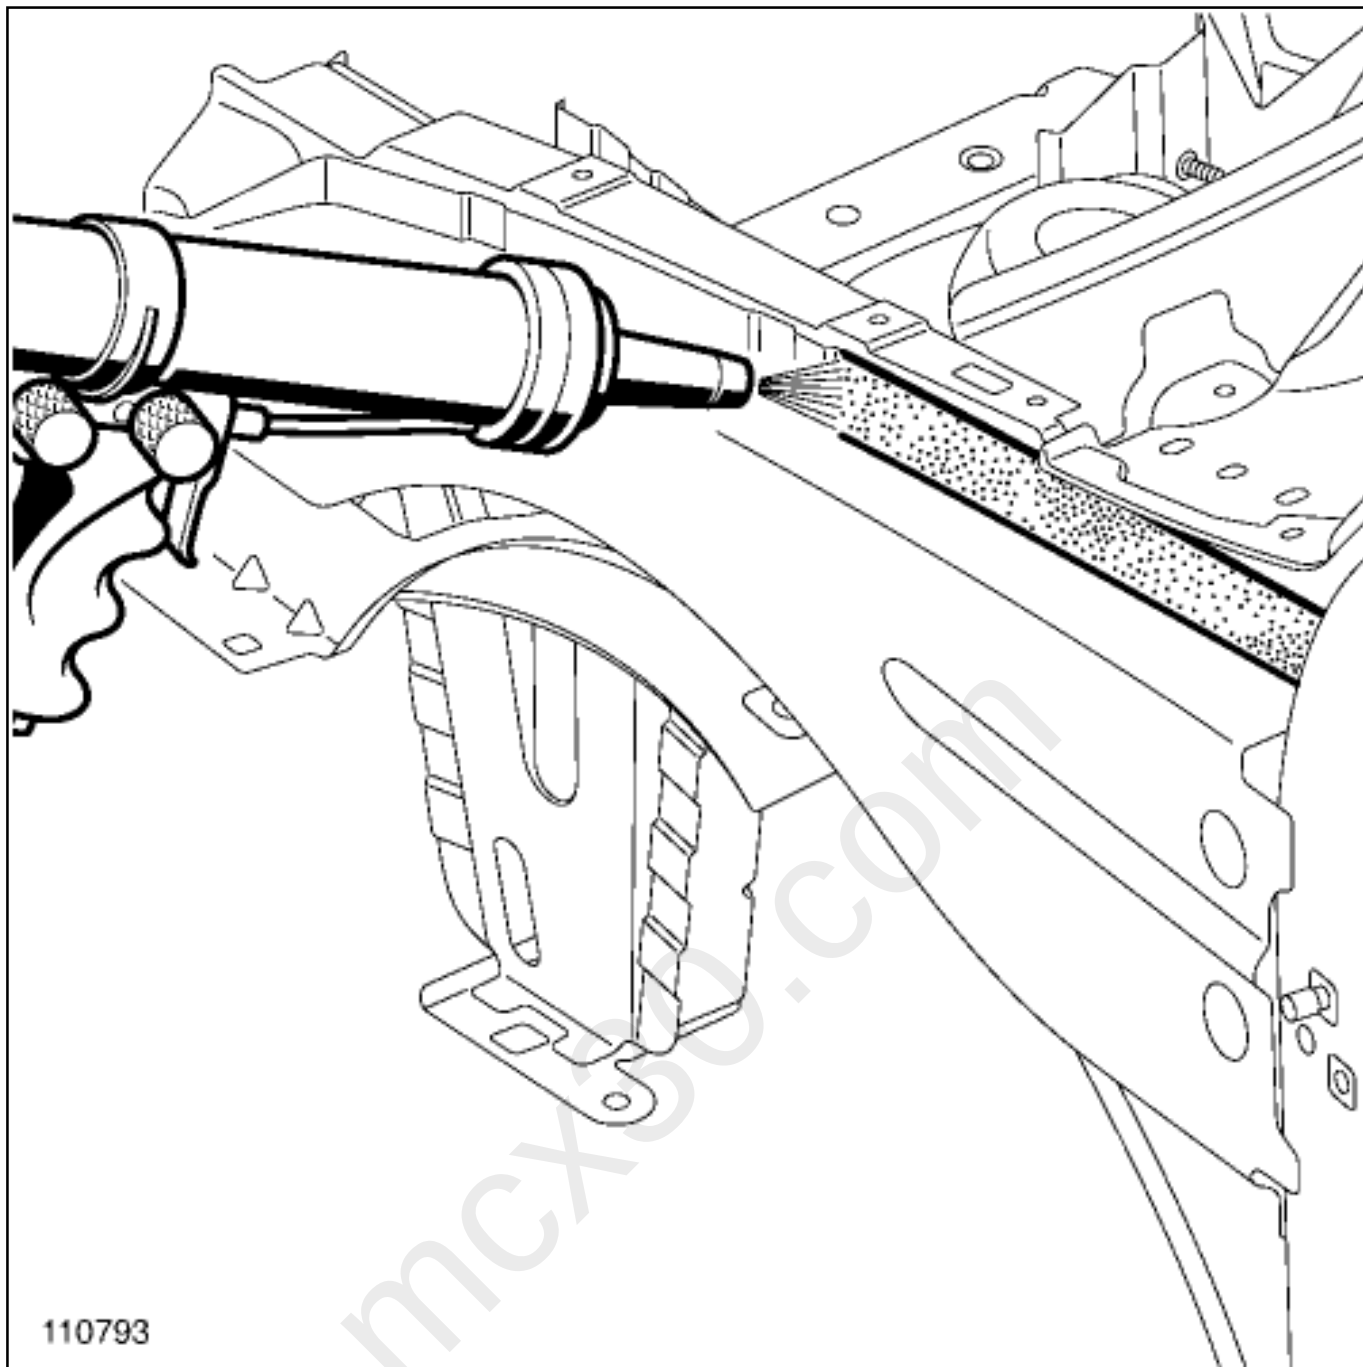

Advantages:

- Allows large areas to be treated.

Modulable appearance depending on the adjustment of the gun in such a way as to reproduce the original appearance.

Disadvantage:

Possible splashing of the product.



Operator protection:



obligatory respiratory protection,




use extra ventilation source.

4. MASTIC FOR BRUSH APPLICATION

Mastic used in the engine compartment or highly exposed areas.

mcx30.com

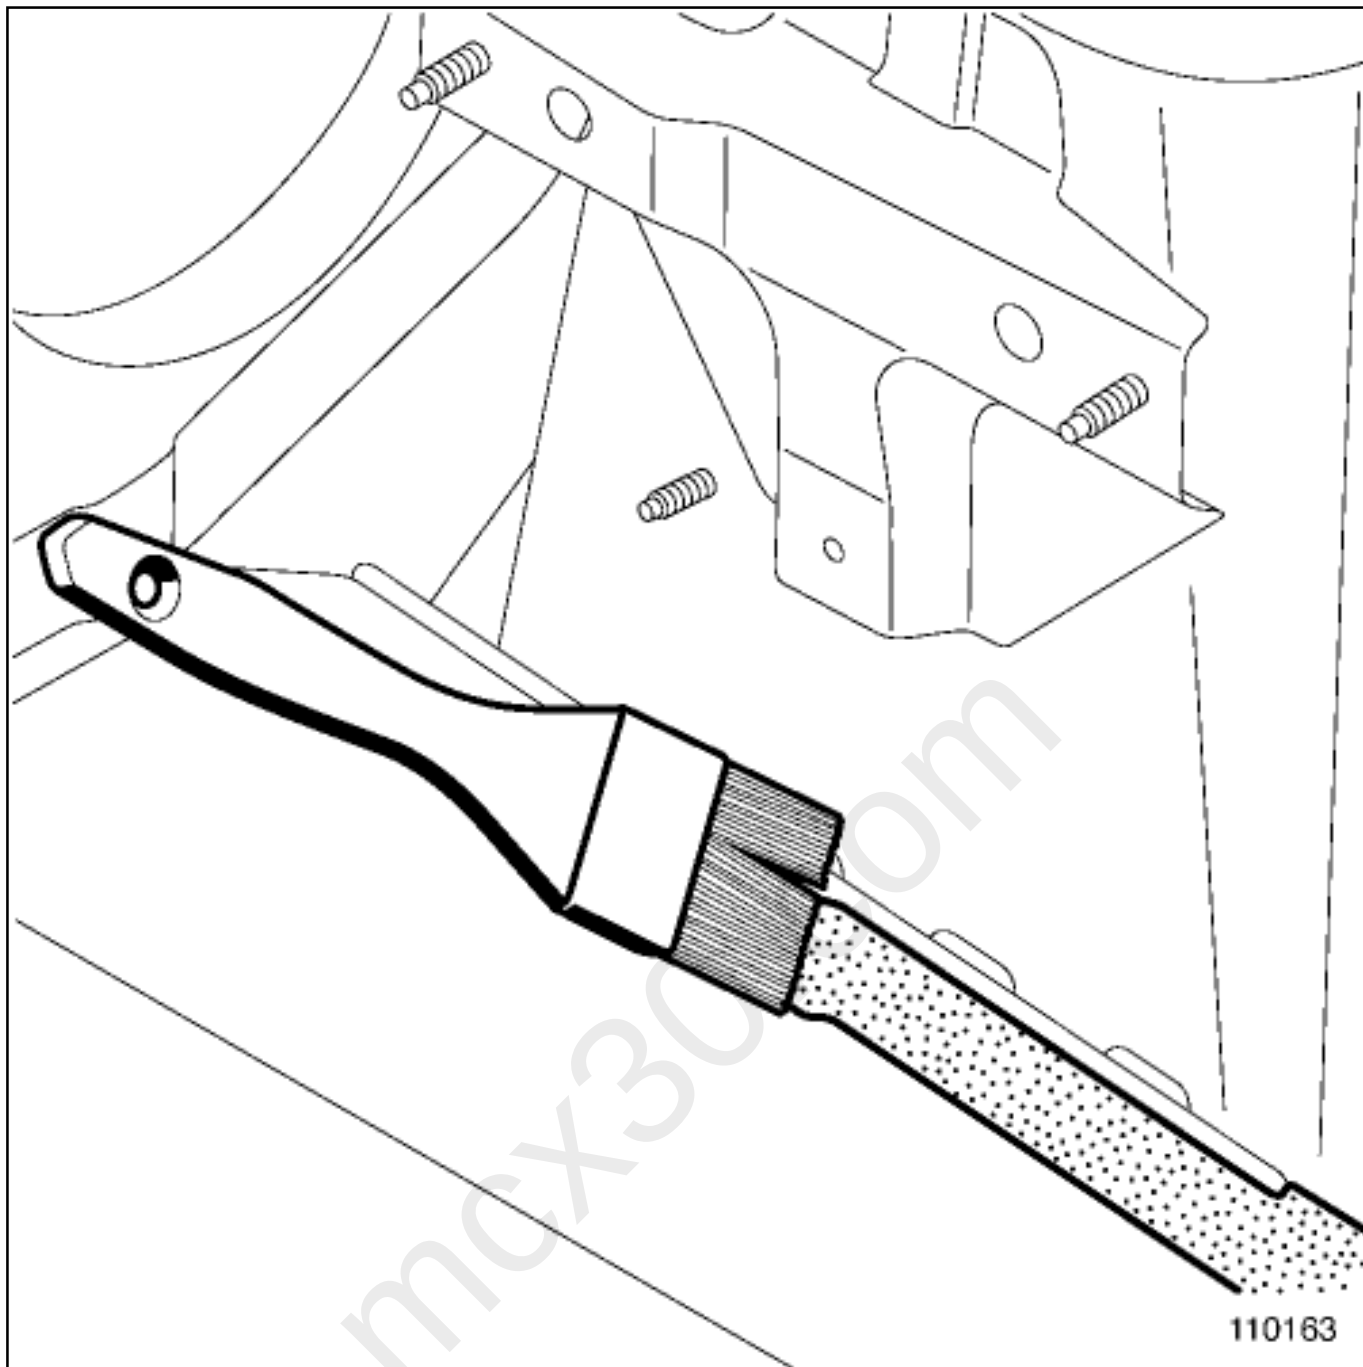

Advantages:

-
- Resists water, hydrocarbons and oil.
-
- Can be painted.

Disadvantages:

-

Original appearance difficult to reproduce.

Edge protection (panel edges).

5. WAX FOR HOLLOW SECTIONS

Wax used for treating hollow sections.

See Technical Note 592A, Paint application procedure, 94B, Protection of hollow sections.

